





## DESCRIPTION OF MICROWAVE SENSOR

Detection zone Max (D x H): 5m x 5m  
Detecting distance: 25% - 100%, adjustable  
Light sensibility: 10-100 lux, adjustable  
Hold time: 5sec-5min, adjustable  
Stand-by Period: 0sec - , adjustable  
Mounting height: 5m Max.  
Detection angle: 150° (Ceiling and wall installation)

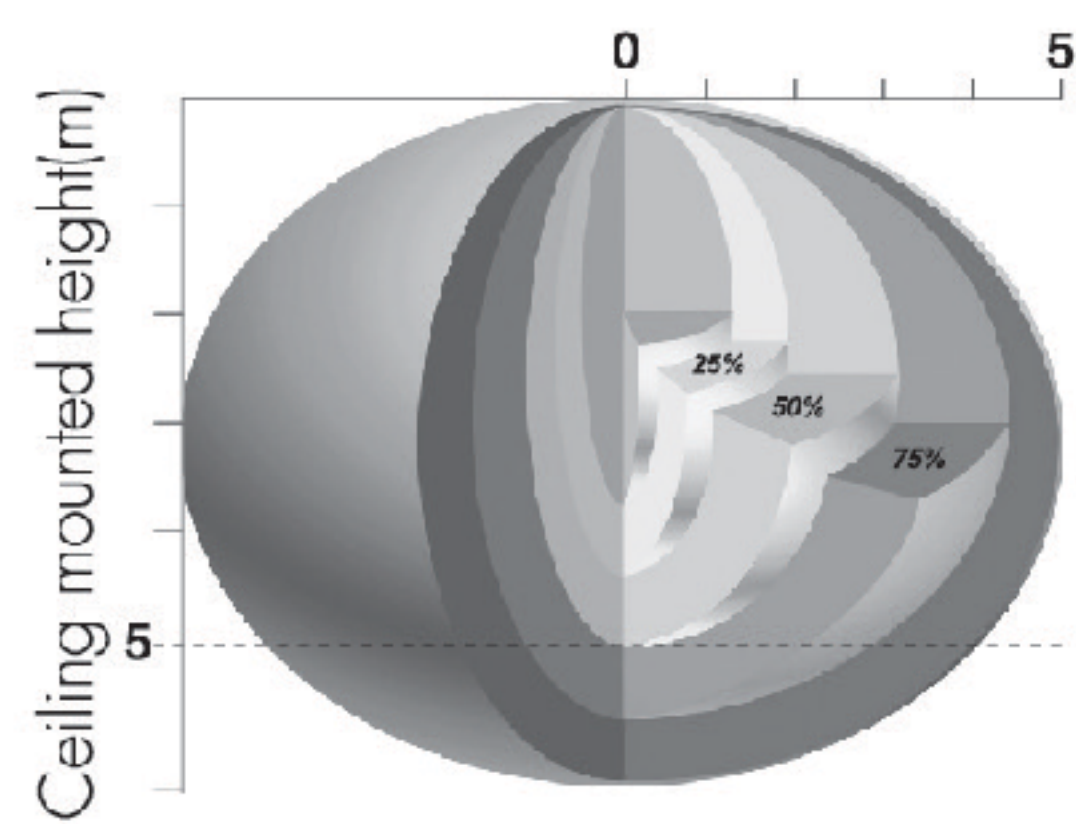

Ceiling mounted detection area (Unit: m)  
Suggested installation height: 3m

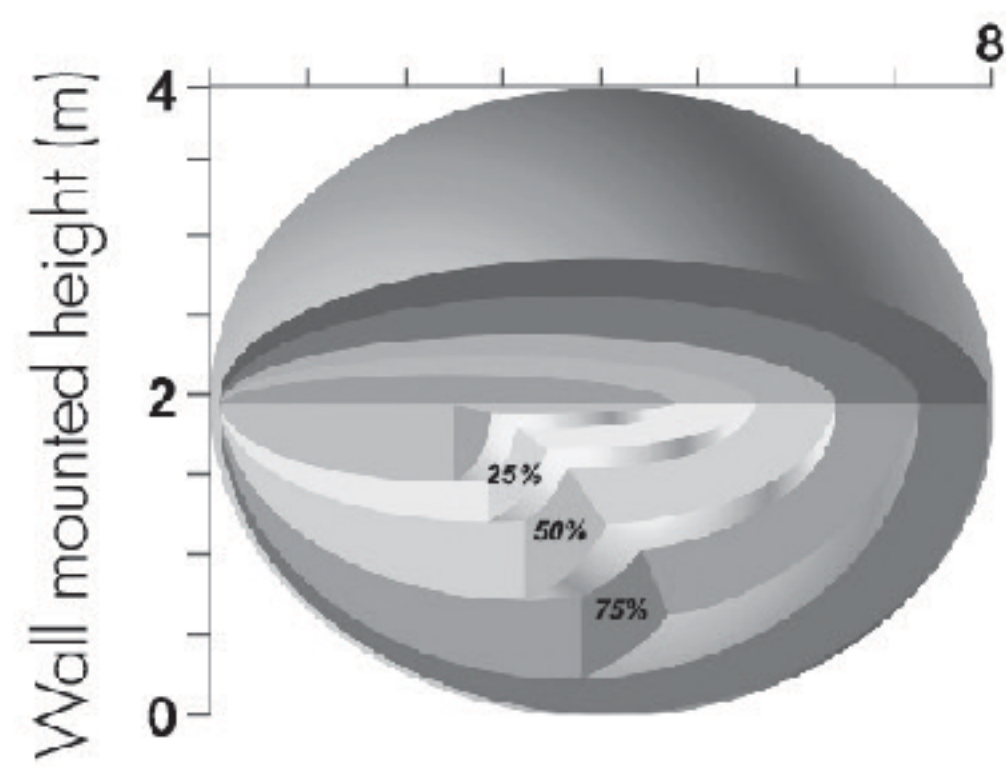

Wall mounted detection area (Unit: m)  
Suggested installation height: 2m



## QUICKINFO

### GENERAL

Finish	Black/Silver/White
Material	Aluminium, Opal Cover
IP	20
Lifespan	L80/50,000h
Warranty	5 years

### LED


LED Chip	Seoul
Lumen	2400lm / 1800lm
Efficacy	Up to 100lm/W
CRI	3000K / 4000K
CCT	>90
SDCM	>3
UGR	<23(x=4H , Y=8H)

### ELECTRICAL

Voltage	220-240V
Power	24/18/10W
Driver (Build-in)	Phase cut

### SENSOR

The configuration of the detecting function is by setting the DIP switch. Default sensor factory settings: Detecting distance: 100%, Hold time: 1 min, Stand-by Period: 60 min (30%). For more details go to download the sensor specification sheet from the products page.

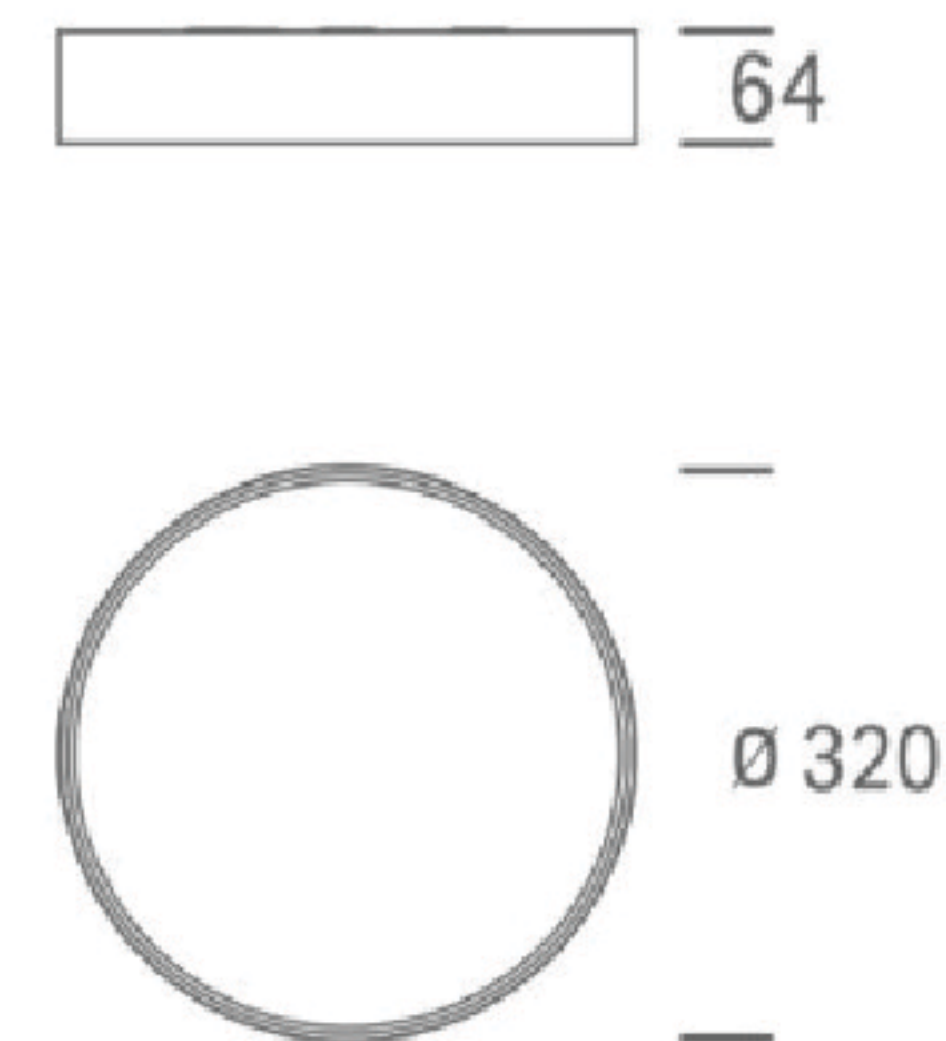

### PURATI PTY LTD


Unit 10, 80 O'Riordan St, Alexandria NSW 2015  
Tel: +61 2 8065 8181  
sales@purati.com






## DESCRIPTION OF MICROWAVE SENSOR

Detection zone Max (D x H): 5m x 5m  
Detecting distance: 25% - 100%, adjustable  
Light sensibility: 10-100 lux, adjustable  
Hold time: 5sec-5min, adjustable  
Stand-by Period: 0sec - , adjustable  
Mounting height: 5m Max.  
Detection angle: 150° (Ceiling and wall installation)

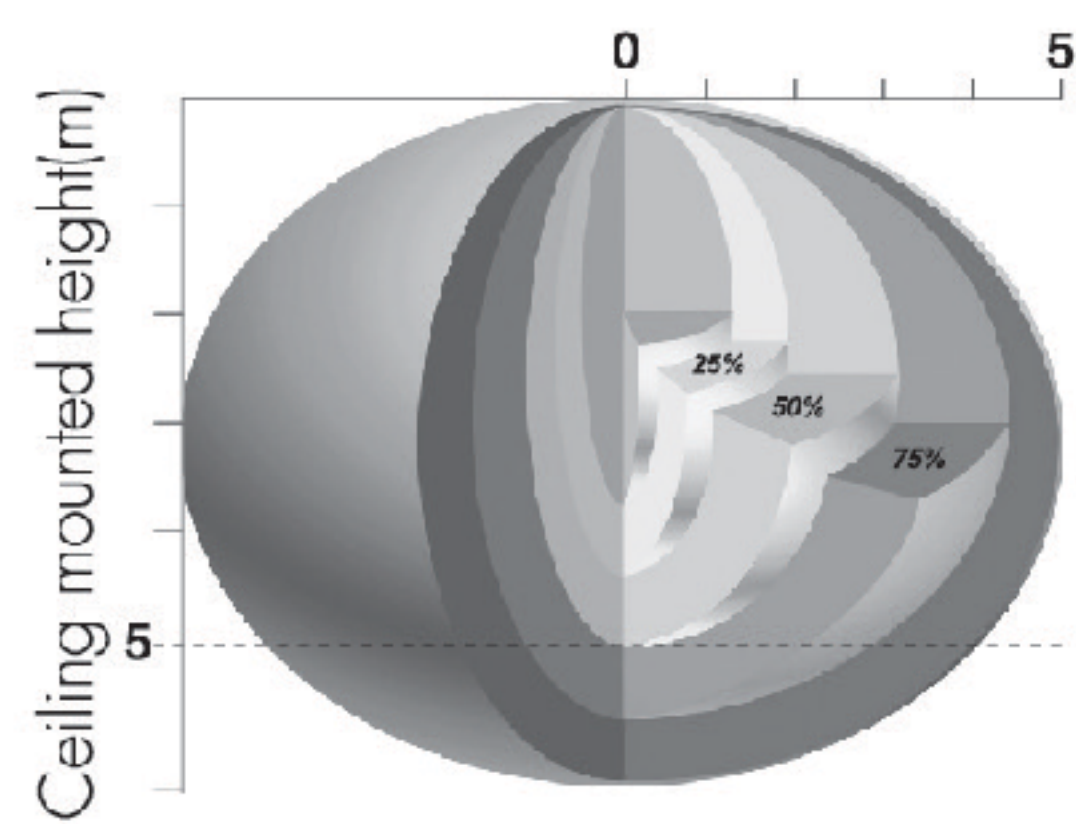

Ceiling mounted detection area (Unit: m)  
Suggested installation height: 3m

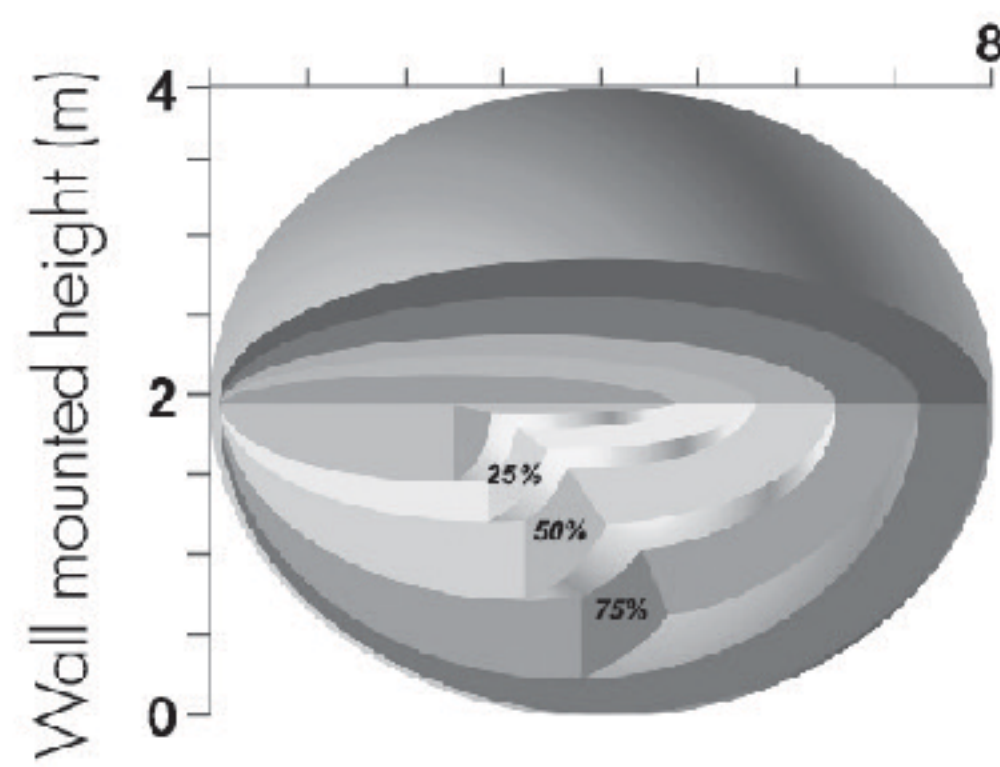

Wall mounted detection area (Unit: m)  
Suggested installation height: 2m



## QUICKINFO

### GENERAL

Finish	Black/Silver/White
Material	Aluminium, Opal Cover
IP	20
Lifespan	L80/50,000h
Warranty	5 years

### LED


LED Chip	Seoul
Lumen	3100lm / 2300lm
Efficacy	Up to 100lm/W
CRI	3000K / 4000K
CCT	>90
SDCM	>3
UGR	<23(x=4H , Y=8H)

### ELECTRICAL

Voltage	220-240V
Power	30/22W
Driver (Build-in)	Phase cut

### SENSOR

The configuration of the detecting function is by setting the DIP switch. Default sensor factory settings: Detecting distance: 100%, Hold time: 1 min, Stand-by Period: 60 min (30%). For more details go to download the sensor specification sheet from the products page.

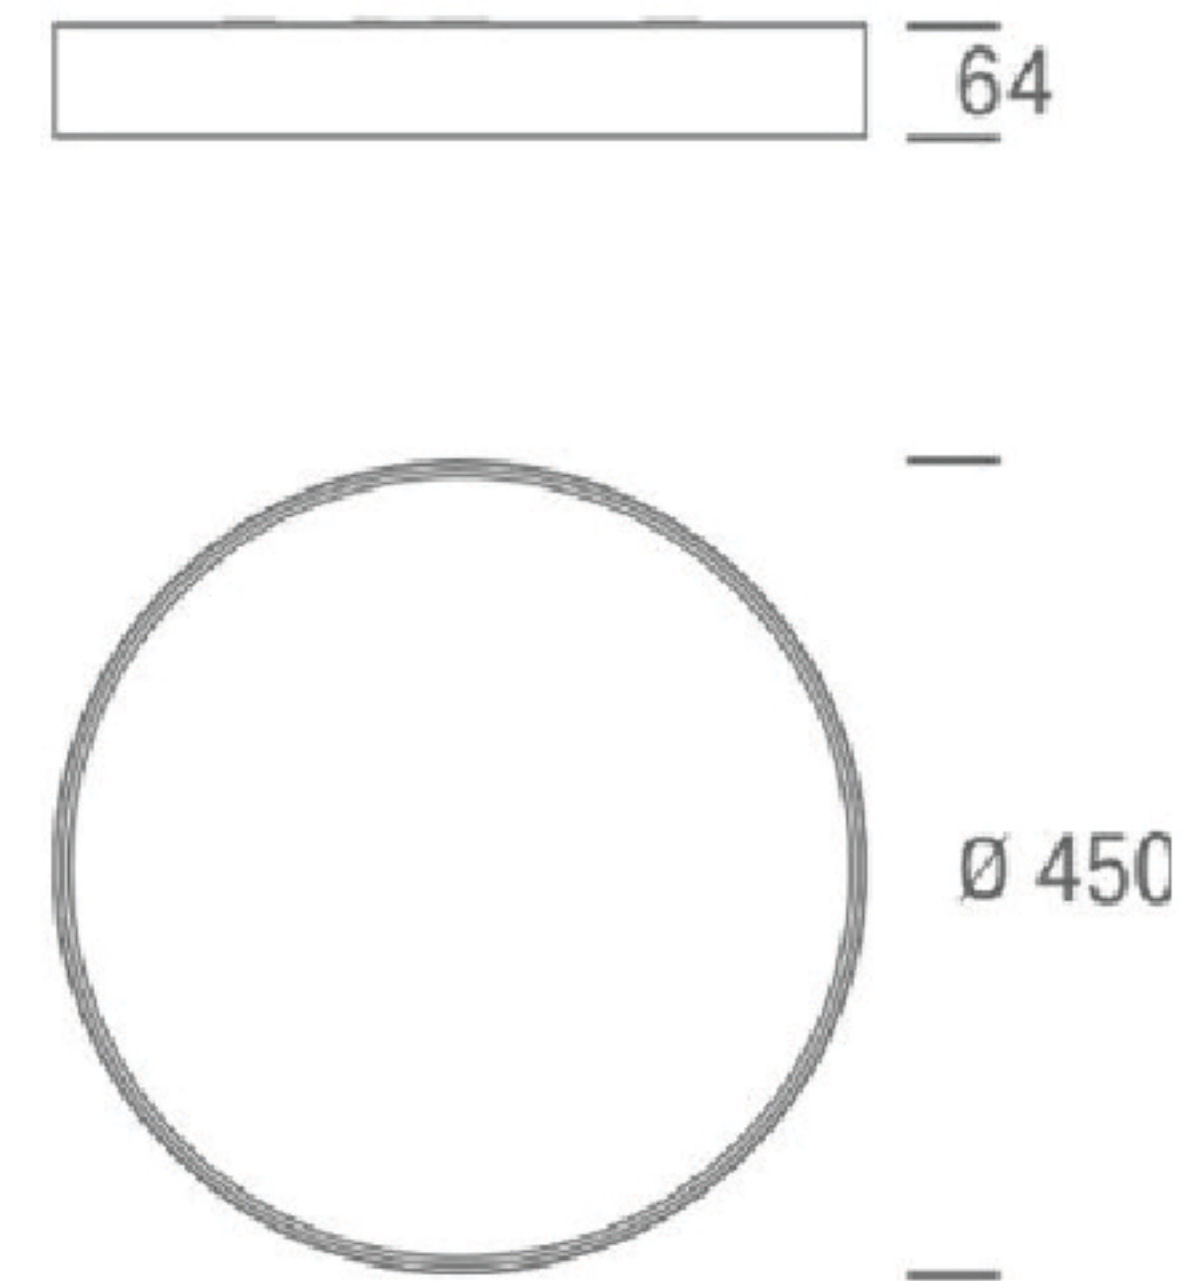


### PURATI PTY LTD

Unit 10, 80 O'Riordan St, Alexandria NSW 2015  
Tel: +61 2 8065 8181  
sales@purati.com




**DESCRIPTION OF MICROWAVE SENSOR**

Detection zone Max (D x H): 5m x 5m  
 Detecting distance: 25% - 100%, adjustable  
 Light sensibility: 10-100 lux, adjustable  
 Hold time: 5sec-5min, adjustable  
 Stand-by Period: 0sec - , adjustable  
 Mounting height: 5m Max.  
 Detection angle: 150° (Ceiling and wall installation)

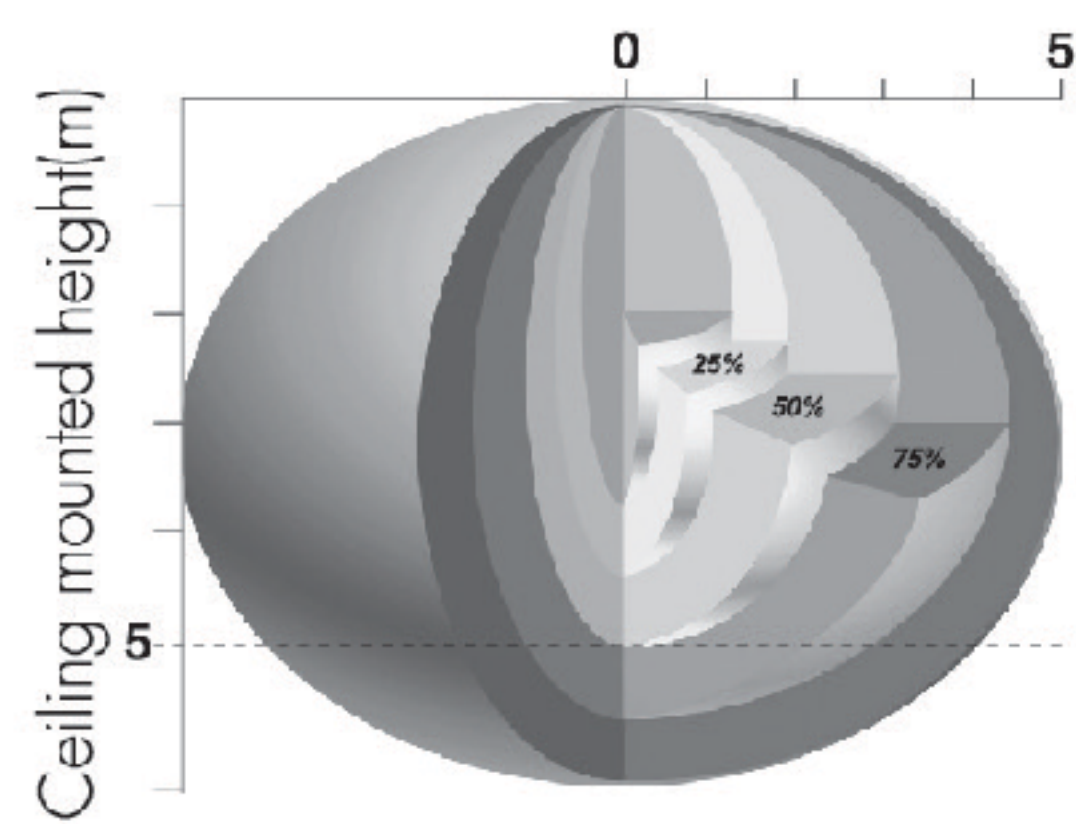

Ceiling mounted detection area (Unit: m)  
Suggested installation height: 3m

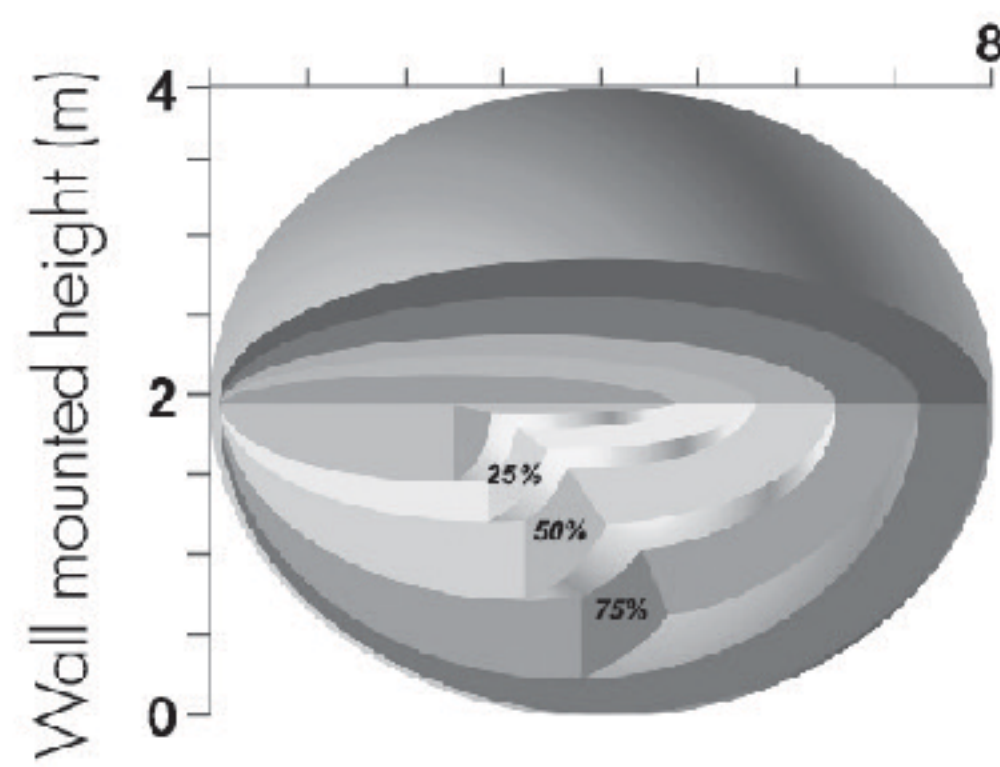

Wall mounted detection area (Unit: m)  
Suggested installation height: 2m



**QUICKINFO**

**GENERAL**

Finish	Black/Silver/White
Material	Aluminium, Opal Cover
IP	20
Lifespan	L80/50,000h
Warranty	5 years

**LED**


LED Chip	Seoul
Lumen	5500lm / 4000lm
Efficacy	Up to 105lm/W
CRI	3000K / 4000K
CCT	>90
SDCM	>3
UGR	<23(x=4H , Y=8H)

**ELECTRICAL**

Voltage	220-240V
Power	55/38W
Driver (Build-in)	Phase cut

**SENSOR**

The configuration of the detecting function is by setting the DIP switch. Default sensor factory settings: Detecting distance: 100%, Hold time: 1 min, Stand-by Period: 60 min (30%). For more details go to download the sensor specification sheet from the products page.

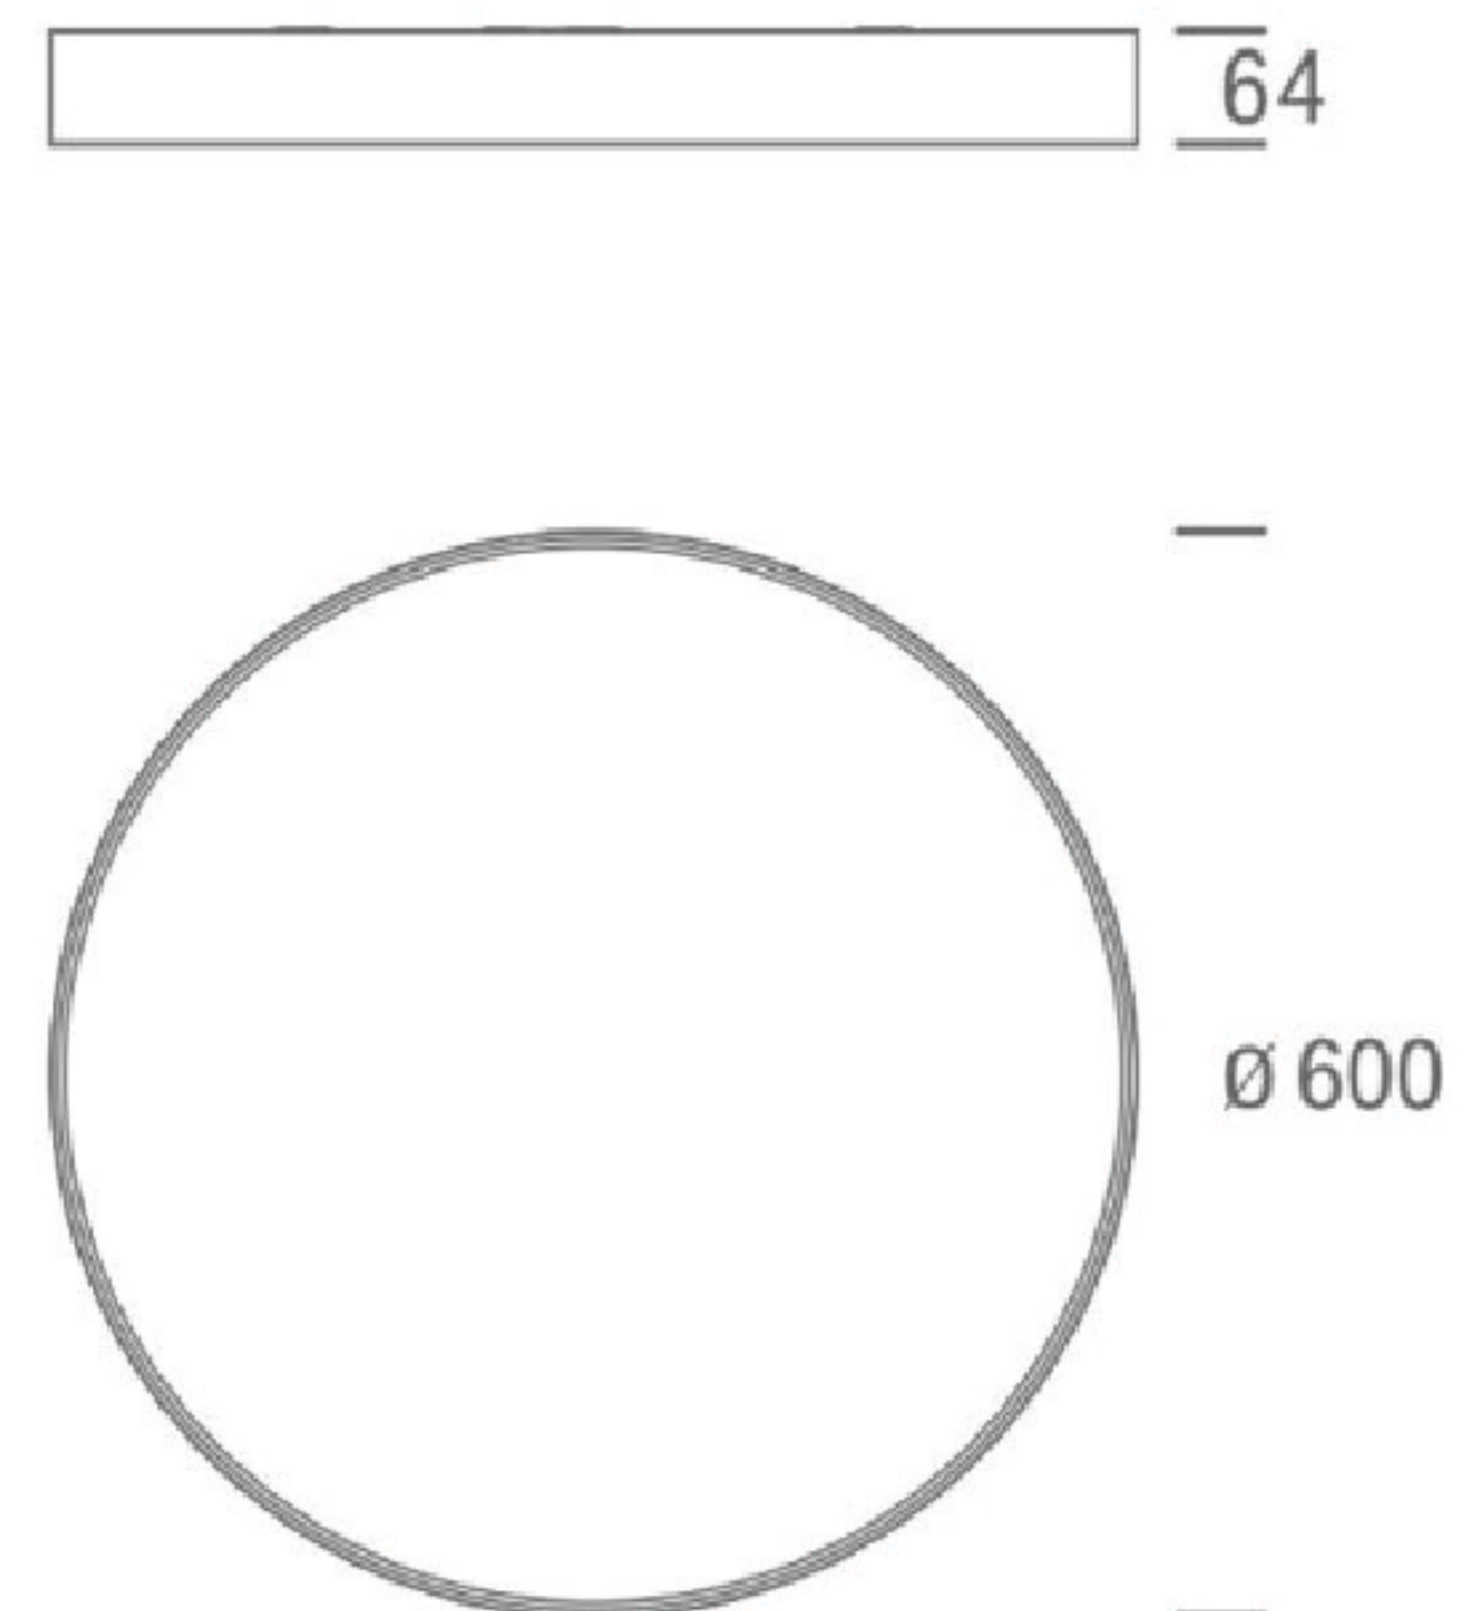

**PURATI PTY LTD**

Unit 10, 80 O’Riordan St, Alexandria NSW 2015  
 Tel: +61 2 8065 8181  
 sales@purati.com