


### DESCRIPTION

The Slice Series comprises of three classic shapes (Circle . Square . Rectangle) that will suit a wide range of projects. The Slice Square with minimalist design, in rich colors, fine finishing and four sizes. The combination of functionality and performance that can be perfectly suited for both consumer and professional applications. Expertly designed and engineered a build-in driver, quick wiring connection, push lock and turning lock system with quick release buttons which results in making the installation easy.

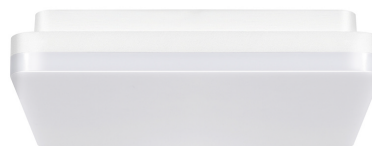

### QUICKINFO

#### GENERAL



Finish	White (RAL 9016)
Material	Die-cast Aluminium/Polycarbonate
IP	54
Lifespan	L80/50,000h
Warranty	5 years

#### LED

Optic	Opal Diffuser
Lumen	2400lm / 1800lm/ 1000lm
Efficacy	100lm/W
CRI	3000K / 4000K
CCT	>90
SDCM	<3
UGR	<23

#### ELECTRICAL

Voltage	220-240V
Power	24/18/10W
Driver (Build-in)	Phase cut



Power Switch	Color Switch	CRI>90	SDCM<3	IP54	IK10	5 YEARS	
--------------	--------------	--------	--------	------	------	---------	--

#### PURATI PTY LTD


Unit 10, O'Riordan St, Alexandria NSW 2015  
Tel: +61 410343721  
sales@purati.com

CONE DIAGRAM

m	Φ cm	Lux AVG	Lux MAX
1	320.00	85.61	310.7
2	640.00	21.40	77.68
3	960.00	9.512	34.52
4	1279.99	5.350	19.42
5	1599.99	3.424	12.43
Angle: 115.99°			

Slice Square 260 10W 3000K

POLAR DIAGRAM




CONE DIAGRAM

m	Φ cm	Lux AVG	Lux MAX
1	320.37	92.05	343.7
2	640.74	23.01	85.93
3	961.11	10.23	38.19
4	1281.49	5.753	21.48
5	1601.86	3.682	13.75
Angle: 116.05°			

Slice Square 260 10W 4000K

POLAR DIAGRAM




CONE DIAGRAM

m	Φ cm	Lux AVG	Lux MAX
1	321.06	159.1	593.9
2	642.12	39.77	148.5
3	963.18	17.68	65.99
4	1284.24	9.944	37.12
5	1605.29	6.364	23.76
Angle: 116.16°			

Slice Square 260 18W 3000K

POLAR DIAGRAM




CONE DIAGRAM

m	Φ cm	Lux AVG	Lux MAX
1	321.31	162.3	605.7
2	642.62	40.58	151.4
3	963.92	18.03	67.30
4	1285.23	10.14	37.85
5	1606.54	6.492	24.23
Angle: 116.20°			

Slice Square 260 18W 4000K

POLAR DIAGRAM




CONE DIAGRAM

m	Φ cm	Lux AVG	Lux MAX
1	321.18	208.5	778.5
2	642.37	52.13	194.6
3	963.55	23.17	86.50
4	1284.73	13.03	48.66
5	1605.92	8.340	31.14
Angle: 116.18°			

Slice Square 260 24W 3000K

POLAR DIAGRAM



CONE DIAGRAM

m	Φ cm	Lux AVG	Lux MAX
1	321.87	210.2	784.4
2	643.74	52.56	196.1
3	965.61	23.36	87.16
4	1287.49	13.14	49.03
5	1609.36	8.409	31.38
Angle: 116.29°			

Slice Square 260 24W 4000K

POLAR DIAGRAM

