

DESCRIPTION

The Filo Series as simple and clean linear LED luminaire in three different lengths. It can be used as a single luminaire or in a composition installation for both consumer and professional applications. This series can be installed surface mounted, pendant or recessed mounted led luminaire for trimless installation in plasterboard ceilings. Designed for zero light leakage to create light uniformity with the high-quality light source.



QUICKINFO

GENERAL


Finish	Black (RAL 9005)
Material	Die-cast Aluminium
IP	20
Lifespan	L80/50,000h
Warranty	5 years

LED

Optic	Opal Diffuser
Lumen	2430lm
Efficacy	90lm/W
CRI	3000K/4000K
CCT	>90
SDCM	<3
UGR	<22
Beam Angle	110°

ELECTRICAL

Voltage	220-240V
Power	27W
Driver (Build-in)	NO DIM

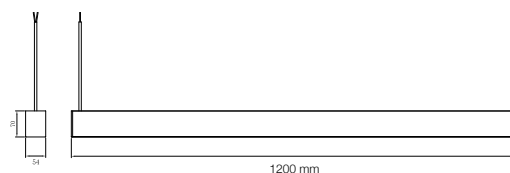

PURATI PTY LTD

Unit 10, O'Riordan St, Alexandria NSW 2015
Tel: +61 410343721
sales@purati.com