

DESCRIPTION

Ultra-low glare IP544 Ceiling Recessed Spotlight with an extra-flat decorative cover.

The latest redesign update to The Static spotlight continues to refine the aesthetic luminaire surface, giving the sleek look and delivers the light in an extremely focused and precise way to the space. Precisely designed and engineered turning lock system makes this spotlight interchangeable reflector with four different beam angles to meet your project requirements.



QUICKINFO

GENERAL


Finish	Black
Material	Die-cast Aluminium
IP	54
Lifespan	L90/40,000h
Warranty	5 years

LED

Optic	Diffuser
Lumen	800lm / 1000lm
Efficacy	Up to 90-95lm/W
CCT	3000K / 4000K
CRI	>90
SDCM	<3
UGR	<10

ELECTRICAL

Voltage	220-240V
Power	8/10W
Driver	Phase cut

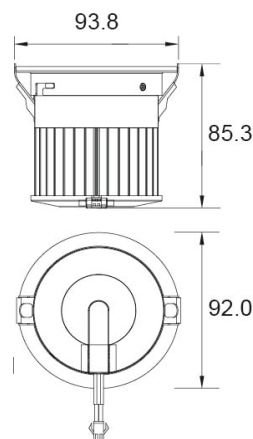

Power Switch	CR >90	SDCM <30	IP5	IK10	5 YEARS	
--------------	--------	----------	-----	------	---------	--

PURATI PTY LTD

Unit 10, 80 O'Riordan St, Alexandria NSW 2015
Tel: +61 2 8065 8181
sales@purati.com

PURATI

Static Essential Downlight

Product Coded

SED-B113D


CONE DIAGRAM

m	Φ cm	Lux AVG	Lux MAX
1	30.63	3025	4371
2	61.25	756.2	1093
3	91.88	336.1	485.6
4	122.50	189.0	273.2
5	153.13	121.0	174.8

Angle: 17.41

Static spotlight 8W

POLAR DIAGRAM




CONE DIAGRAM

m	Φ cm	Lux AVG	Lux MAX
1	41.21	2103	3066
2	82.41	525.8	766.5
3	123.62	233.7	340.7
4	164.82	131.4	191.6
5	206.03	84.13	122.6

Angle: 23.28

Static spotlight 8W

POLAR DIAGRAM




CONE DIAGRAM

m	Φ cm	Lux AVG	Lux MAX
1	68.43	1148	1717
2	136.86	287.1	429.3
3	205.29	127.6	190.8
4	273.72	71.78	107.3
5	342.15	45.94	68.69

Angle: 37.78

Static spotlight 8W

POLAR DIAGRAM




CONE DIAGRAM

m	Φ cm	Lux AVG	Lux MAX
1	30.50	4213	6134
2	60.99	1053	1533
3	91.49	468.1	681.6
4	121.99	263.3	383.4
5	152.48	168.5	245.4

Angle: 17.34

Static spotlight 12W

POLAR DIAGRAM




CONE DIAGRAM

m	Φ cm	Lux AVG	Lux MAX
1	41.18	2879	4212
2	82.35	719.6	1053
3	123.53	319.8	468.0
4	164.70	179.9	263.2
5	205.88	115.1	168.5

Angle: 23.27

Static spotlight 12W

POLAR DIAGRAM




CONE DIAGRAM

m	Φ cm	Lux AVG	Lux MAX
1	68.49	1575	2353
2	136.98	393.8	588.1
3	205.48	175.0	261.4
4	273.97	98.44	147.0
5	342.46	63.00	94.10

Angle: 37.81

Static spotlight 12W

POLAR DIAGRAM



PURATI PTY LTD

Unit 10, 80 O'Riordan St, Alexandria NSW 2015

Tel: +61 2 8065 8181

sales@purati.com

purati.com