

FUOCO



Classic, Durability, and Versatility

Along with its minimal design and fine finishing, the Fuoco series offers a wide range of mounting options and maximum visual comfort, making it ideal for all applications.



CRI >92+

SDCM <3

Low glare

Long-lasting lifetime

Flicker free


5 Years



The trimless plaster downlight



350° Rotation and 25° Tilt

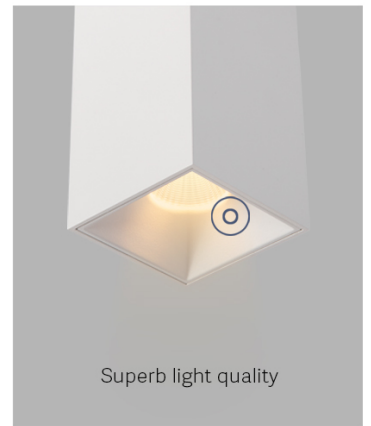

Superb light quality




Thin trim design

THE TECHNICAL DATA

 <p>Model</p>	 <p>Fuoco Round Trim</p>	 <p>Fuoco Round Trim Adjustable</p>	 <p>Fuoco Square Trim</p>	 <p>Fuoco Square Trim Adjustable</p>	 <p>Fuoco Duo Recessed</p>
Mounting	Recessed				
Materials	Powder Coated Aluminium				
Finishes	White, Black				
Adjustability		350° Rotation and 25° Tilt		350° Rotation and 25° Tilt	
Power	10W as standard, 13W on request				20W
Luminous Flux of Luminaire	1002lm				2000lm
Beam Angle	15°/24°/36°/60°				
Colour Rendering	CRI>92+				
Colour Deviation	SDCM<3				
Unified Glare Rating	UGR<19 or <16 only for black				
IP Rating	IP54				
IK Rating	IK10				
Insulating Rating	IC-4				
Driver	Phase Dimming, DALI 2.0				
Lifetime	L90 50,000h				
Warranty	5 Years				
Accessories	Honeycomb Optic, Glass Lens, Suspension kit (2 meter)				




THE TECHNICAL DATA

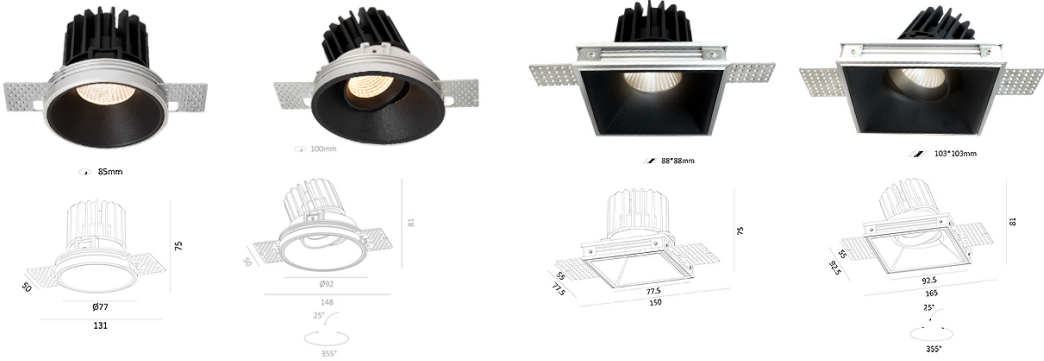 Model	 Fuoco Round Trimless Fixed Fuoco Round Trimless Adjustable Fuoco Square Trimless Fixed Fuoco Square Trimless Adjustable			
Mounting	Recessed			
Materials	Powder Coated Aluminium			
Finishes	White, Black			
Adjustability		350° Rotation and 25° Tilt		350° Rotation and 25° Tilt
Power	10W as standard, 13W on request			
Luminous Flux of Luminaire	1002lm			
Beam Angle	15°/24°/36°/60°			
Colour Rendering	CRI>92+			
Colour Deviation	SDCM<3			
Unified Glare Rating	UGR<19 or <16 only for black			
IP Rating	IP54			
IK Rating	IK10			
Insulating Rating	IC4			
Driver	Phase Dimming, DALI 2.0			
Lifetime	L90 50,000h			
Warranty	5 Years			
Accessories	Honeycomb Optic, Glass Lens, Suspension kit (2 meter)			



THE TECHNICAL DATA

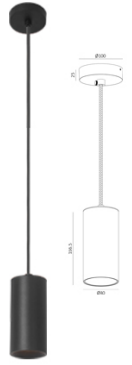

Model

Fuoco Round Surface

Fuoco Round Surface Adjustable

Fuoco Square Surface

Fuoco Square Surface Adjustable

Fuoco Round Pendant

Mounting

Surface mounted

Suspension

Materials

Powder Coated Aluminium

Finishes

White, Black

Adjustability

350° Rotation and 25° Tilt

350° Rotation and 25° Tilt

Power

10W as standard, 13W on request

Luminous Flux of Luminaire

1002lm

Beam Angle

15°/24°/36°/60°

Colour Rendering

CRI>92+

Colour Deviation

SDCM<3

Unified Glare Rating

UGR<19 or <16 only for black

IP Rating

IP54

IP20

IK Rating

IK10

Insulating Rating

IC4

Driver

Phase Dimming, DALI 2.0

Lifetime

L90 50,000h

Warranty

5 Years

Accessories

Honeycomb Optic, Glass Lens, Suspension kit (2 meter)

Angle 15°

Angle 24°

Angle 36°

Angle 60°

PURATI

PREMIUM ARCHITECTURAL LIGHTING

Unit 10, 80 O'Riordan Street, Alexandria NSW 2015 | Phone: +612 8065 8181 | Email: Sales@purati.com
www.purati.com