

PURATI





FUSI

The typical modular design that combines beauty, precision, and versatility

Thanks to their powerful LEDs, our swivelling spotlights deliver ideal for indoor lighting. Our spotlights are available in surface-mounted, semi-recessed or track-mounted versions, with wide to focused beam angles. They can be used for presentation, in retail situations, or in museums.

npk design, the Netherlands.

CRI >95 SDCM <3 UGR<13 Long-lasting lifetime Low glare Flicker Free

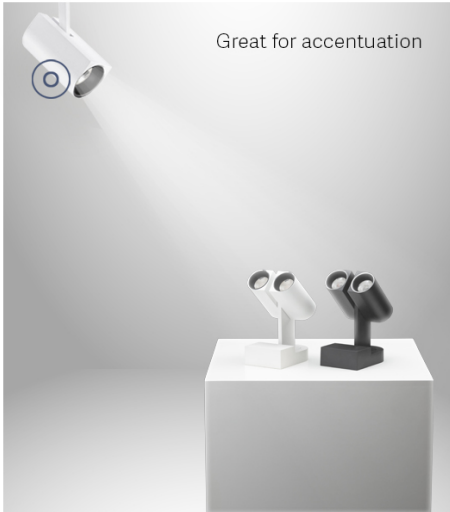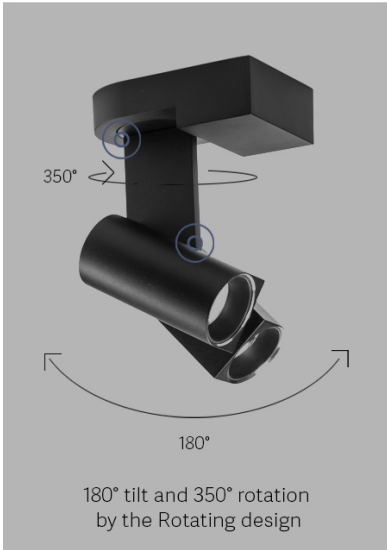

THE TECHNICAL DATA



Model

Fusi 46 Spot Uno

Fusi 46 Spot Uno

Fusi 46 Spot Duo

Fusi 46 Spot Duo

Mounting	Semi-Recessed	Surface Mounted	Semi-Recessed	Surface Mounted
Materials	Powder Coated Aluminium			
Finishes	White, Black			
Track Compatibility	Non			
Adjustability	355° Rotation, 90° Tilt		355° Rotation, 180° Tilt	
Power	11W/8W		20W/15W	
Luminous Flux of Luminaire	780lm/620lm		1500lm/1200lm	
Beam Angle	15°/24°/36°/50°			
CCT	3000K/4000K, 2700K on request			
Colour Rendering	CRI>95			
Colour Deviation	SDCM<3			
Unified Glare Rating	UGR<13			
IP Rating	IP20			
IK Rating	IK10			
Driver	Triac DIM (Dimming range: 1%-100%), non-Dim, DALI 2.0			
Lifetime	L80 50,000h			
Warranty	5 Years			
Accessories	Honeycomb Louver, Cross Louver			

Angle 15°

Angle 24°

Angle 36°

Angle 50°

PURATI

PREMIUM ARCHITECTURAL LIGHTING

Unit 10, 80 O'Riordan Street, Alexandria NSW 2015 | Phone: +612 8065 8181 | Email: Sales@purati.com
www.purati.com

THE TECHNICAL DATA



Model




Fusi 46 Spot Uno



Fusi 46 Spot Duo

Mounting	Track Light	
Materials	Powder Coated Aluminium	
Finishes	White, Black	
Track Compatibility	3 Circuit	
Adjustability	355° Rotation, 90° Tilt	355°Rotation, 180° Tilt
Power	11W/8W	20W/15W
Luminous Flux of Luminaire	780lm/620lm	1500lm/1200lm
Beam Angle	15°/24°/36°/50°	
CCT	3000K/4000K, 2700K on request	
Colour Rendering	CRI>95	
Colour Deviation	SDCM<3	
Unified Glare Rating	UGR<13	
IP Rating	IP20	
IK Rating	IK10	
Driver	Triac DIM (Dimming range: 1%-100%), non-Dim, DALI 2.0	
Lifetime	L80 50,000h	
Warranty	5 Years	
Accessories	Honeycomb Louver, Cross Louver	





PURATI

PREMIUM ARCHITECTURAL LIGHTING

Unit 10, 80 O'Riordan Street, Alexandria NSW 2015 | Phone: +612 8065 8181 | Email: Sales@purati.com
www.purati.com

THE TECHNICAL DATA

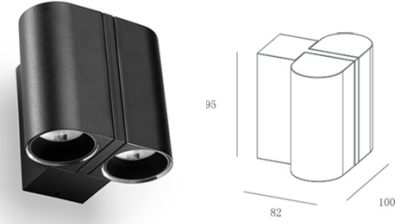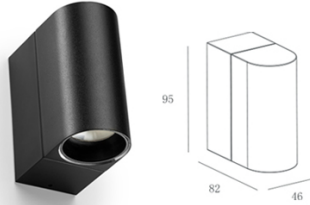

Model

Fusi 46 Spot Wall Uno

Fusi 46 Spot Wall Duo

Mounting	Wall Mounted	
Materials	Powder Coated Aluminium	
Finishes	White, Black	
Track Compatibility	Non	
Adjustability	355° Rotation, 90° Tilt	355° Rotation, 180° Tilt
Power	6W	12W
Luminous Flux of Luminaire	510lm	960lm
Beam Angle	15°/24°/36°/50°	
CCT	3000K/4000K, 2700K on request	
Colour Rendering	CRI>95	
Colour Deviation	SDCM<3	
Unified Glare Rating	UGR<13	
IP Rating	IP20	
IK Rating	IK10	
Driver	Triac DIM (Dimming range: 1%-100%), non-Dim, DALI 2.0	
Lifetime	L80 50,000h	
Warranty	5 Years	
Accessories	Honeycomb Louver, Cross Louver	

Angle 15°

Angle 24°

Angle 36°

Angle 50°

PURATI

PREMIUM ARCHITECTURAL LIGHTING

Unit 10, 80 O'Riordan Street, Alexandria NSW 2015 | Phone: +612 8065 8181 | Email: Sales@purati.com
www.purati.com