

PURA

Perfectly design. Perfectly even. Perfectly round.

The Pura Trim is a clean, durable design style that reveals an architectonic and balanced character. Its various functions, multiple applications and uniform light distribution, can be used in all areas.

npk design, The Netherlands

CRI>90

SDCM<3

DALI 2.0

Flicker free

Emergency light

IP54

5 Years

Fine finishing



Unique details




Emergency light



IP Rating Protection, push lock system



Perfectly round

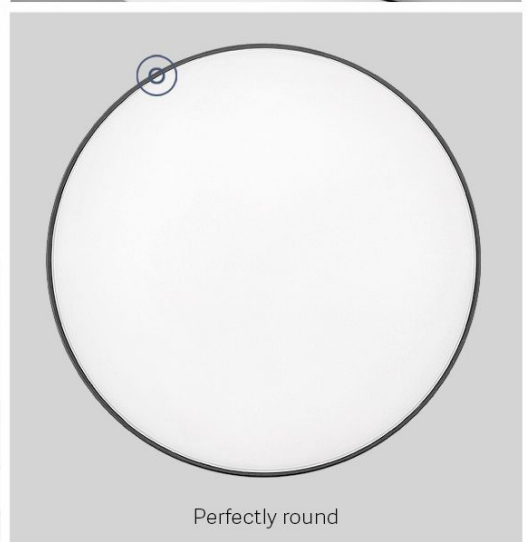



PURA

Pura Build-on 150

This build-on downlight combines a sleek design with an opal diffuser for even light distribution that is perfectly suited for any space,

CRI>90

SDCM<3

Flicker free

IP65

5 Years












PURA

Pura Build-on 100 IP65

With a simple and pure design without visible screws and high IP rating protection, the Pura Build-on 100 IP65 surface mounted downlight is perfect for illuminating both indoor and outdoor space.



THE TECHNICAL DATA

 Model	   Pura Trim 270		  Pura Trim 270 Suspension		   Pura Trim 350		  Pura Trim 350 Suspension	
Mounting	Surface mounted		Suspension		Surface mounted		Suspension	
Materials	Polycarbonate		Powder coated Aluminium		Polycarbonate		Powder coated Aluminium	
Finishes	White, Black, Silver		White, Black		White, Black, Silver		White, Black, Silver	
Track Compatibility	3 Phase		Non					
Adjustability	350° Rotation, 90° Tilt		Non					
Power	24W/18W/10W Switch				32W/24W Switch			
Luminous Flux of Luminaire	2400lm/1800lm/1000lm				3200lm/2400lm			
Beam Angle	120							
CCT	3000K/4000K Switch							
Colour Rendering	CRI>90							
Colour Deviation	SDCM<3							
Unified Glare Rating	UGR<23 (X=4H, Y=8H)							
IP Rating	IP54		IP20		IP54		IP20	
IK Rating	IK10							
Driver	Triac DIM (Dimming range: 1%-100%), non-DIM, DALI 2.0							
Function	CF sensor, CF Sensor integrated with emergency pack, Emergency light				CF sensor, CF Sensor integrated with emergency pack, Emergency light			
Lifetime	L80 50,000h							
Warranty	5 years							
Accessories	Suspended kit (2 meter), 3 phase track adapter							



 Angle 120°

PURATI

PREMIUM ARCHITECTURAL LIGHTING

Unit 10, 80 O'Riordan Street, Alexandria NSW 2015 | Phone: +612 8065 8181 | Email: Sales@purati.com
www.purati.com

THE TECHNICAL DATA



Model

Pura Trim 270 Recessed

Pura Trim 270 Track light

Pura Build-on 100 IP65

Pura Build-on 150

Mounting	Recessed	Track mounted	Surface mounted	
Materials	Polycarbonate		Powder coated Aluminium	
Finishes	White	White, Black		
Track Compatibility	Non			
Adjustability	Non			
Power	24W/18W/10W Switch		10W	12W/8W Switch
Luminous Flux of Luminaire	2400lm/1800lm/1000lm		918lm	1200lm/850lm
Beam Angle	120°		24°/36°/60°	120°
CCT	3000K/4000K Switch		3000K, 4000K	
Colour Rendering	CRI>90			
Colour Deviation	SDCM<3			
Unified Glare Rating	UGR<23 (X=4H, Y=8H)		UGR<19	UGR<23
IP Rating	IP20	IP20	IP65	IP20,IP44 Made to order
IK Rating	IK10			
Driver	Triac DIM (Dimming range: 1%-100%), non-DIM, DALI 2.0		Triac DIM, non-DIM or DALI 2.0 made to order	
Function	CF sensor, CF Sensor integrated with emergency pack, Emergency light			
Lifetime	L80 50,000h		L90, 50,000h	L80 50,000h
Warranty	5 years			
Accessories	Suspended kit (2 meter), 3 phase track adapter			

Angle 24°

Angle 36°

Angle 60°

Angle 120°

PURATI

PREMIUM ARCHITECTURAL LIGHTING

Unit 10, 80 O'Riordan Street, Alexandria NSW 2015 | Phone: +612 8065 8181 | Email: Sales@purati.com

www.purati.com