



Pure architectural light fittings for all applications



Designed and engineered by npk design, The Netherlands.

UGR<19 **CRI >90** **SDCM <3** **Flicker free build-in driver** **DALI 2.0** **Dot-free design**
Quick installation **Easy to maintenance** **Long-lasting lifetime** **5-year warranty**


Compo series is a very classic cylindrical design in various sizes and mounting options that integrated elegantly into any architecture.

Uniformly illuminated product thanks to opal and micro-prismatic diffuser options. Opal diffuser provides homogeneous general lighting and Micro-prismatic diffuser (UGR<19) is ideal for office lighting.

Available in direct only or direct-indirect light distribution options which perfect for office use, education, health-care, retail, hospitality, and hotel.

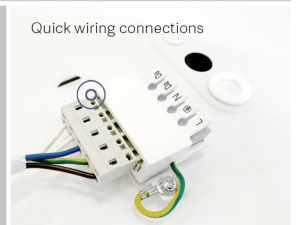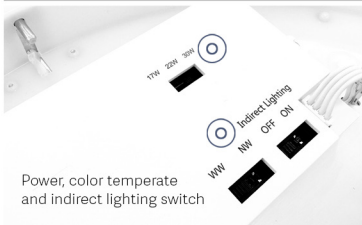

THE TECHNICAL DATA

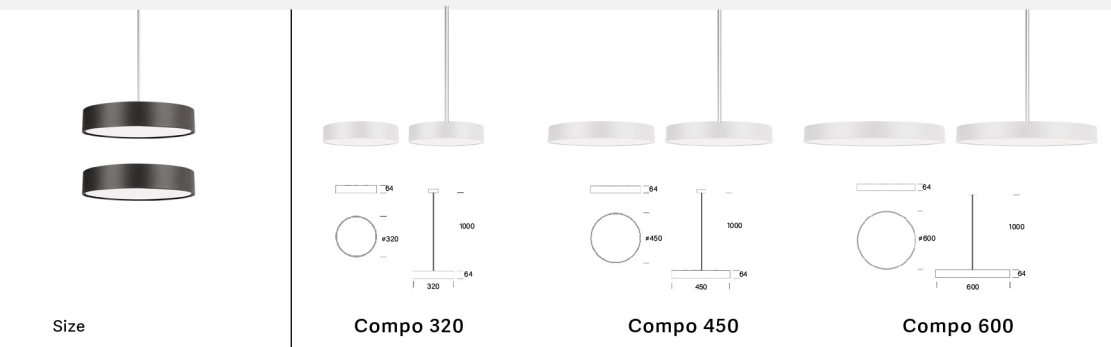


Size	<p>Compo 320 Compo 450 Compo 600</p>		
Martials	Aluminium, Opal cover or Microprism cover		
Finishes	White, Black		
Mounting	Surface mounted, Rod suspension (1 meter as standard)		
Adjustability	non		
Power	24W/18W/10W Switch,	30W/22W Switch	55W/38W Switch
Luminous Flux of Luminaire	2400lm/1800lm	3100lm/2300lm	5500lm/4000lm
Beam Angle	120°		
CCT	3000K/4000K Switch		
Colour Rendering	CRI>90		
Colour Deviation	SDCM<3		
Unified Glare Rating	UGR<23 (X=4H, Y=8H), URG<19		
IP Rating	IP20		
IK Rating	IK07		
Driver	Phase Dimming, DALI		
Voltage	220-240V		
Lifetime	L80 50,000h		
Warranty	5 Years		
Light distribution	Direct only, Direct and Indirect		



PURATI

PREMIUM ARCHITECTURAL LIGHTING

THE TECHNICAL DATA

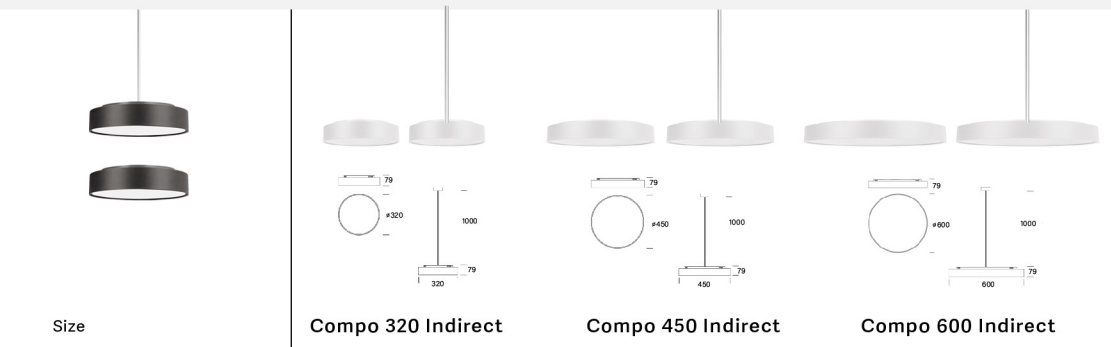

Size	Compo 320 Indirect Compo 450 Indirect Compo 600 Indirect		
Martials	Aluminium, Opal cover or Microprism cover		
Finishes	White, Black		
Mounting	Surface mounted, Rod suspension (1 meter as standard)		
Adjustability	non		
Power	24W/18W/10W Switch,	30W/22W Switch	55W/38W Switch
Luminous Flux of Luminaire	2400lm/1800lm	3100lm/2300lm	5500lm/4000lm
Beam Angle	120°		
CCT	3000K/4000K Switch		
Colour Rendering	CRI>90		
Colour Deviation	SDCM<3		
Unified Glare Rating	UGR<23 (X=4H, Y=8H), UGR <19		
IP Rating	IP20		
IK Rating	IK07		
Driver	Phase Dimming, DALI		
Voltage	220-240V		
Lifetime	L80 50,000h		
Warranty	5 Years		
Light distribution	Direct - Indirect		




PURATI

PREMIUM ARCHITECTURAL LIGHTING

THE TECHNICAL DATA



Size

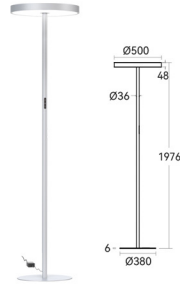

Compo Floor Luminaire

Martials	Aluminium, Microprism cover
Finishes	White, Black , sliver
Adjustability	non
Power	80W (±40W/40W±)
Luminous Flux of Luminaire	8500lm (±5000lm/3500lm)
Beam Angle	±115°/90°↓
CCT	3000K/5700K
Colour Rendering	> 90
Colour Deviation	SDCM<3
Unified Glare Rating	UGR<16
IP Rating	IP20
IK Rating	IK07
Driver	Touch Panel Dimming
Voltage	220-240V
Lifetime	L80 50,000h
Warranty	5 Years
Light distribution	Direct - Indirect

Angle ±115°

Angle 90°↓

PURATI

PREMIUM ARCHITECTURAL LIGHTING