


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz		
Lamp Flux:313.833x1 lm		
NAME: Slice Circle IV+ WW 2W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax(cd)	95.03	S/MH(C0/180)	1.31
NOMINAL POWER(W)	2	LOR(%)	100.0	S/MH(C90/270)	1.30
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	313.83	η UP,DN(C0-180)	3.0,46.0
NOMINAL FLUX(lm)	313.833	CIE CLASS	DIRECT	η UP,DN(C180-360)	3.0,48.0
LAMPS INSIDE	1	η up(%)	6.0	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	229.8	η down(%)	94.0	CIBSE SHR MAX	1.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

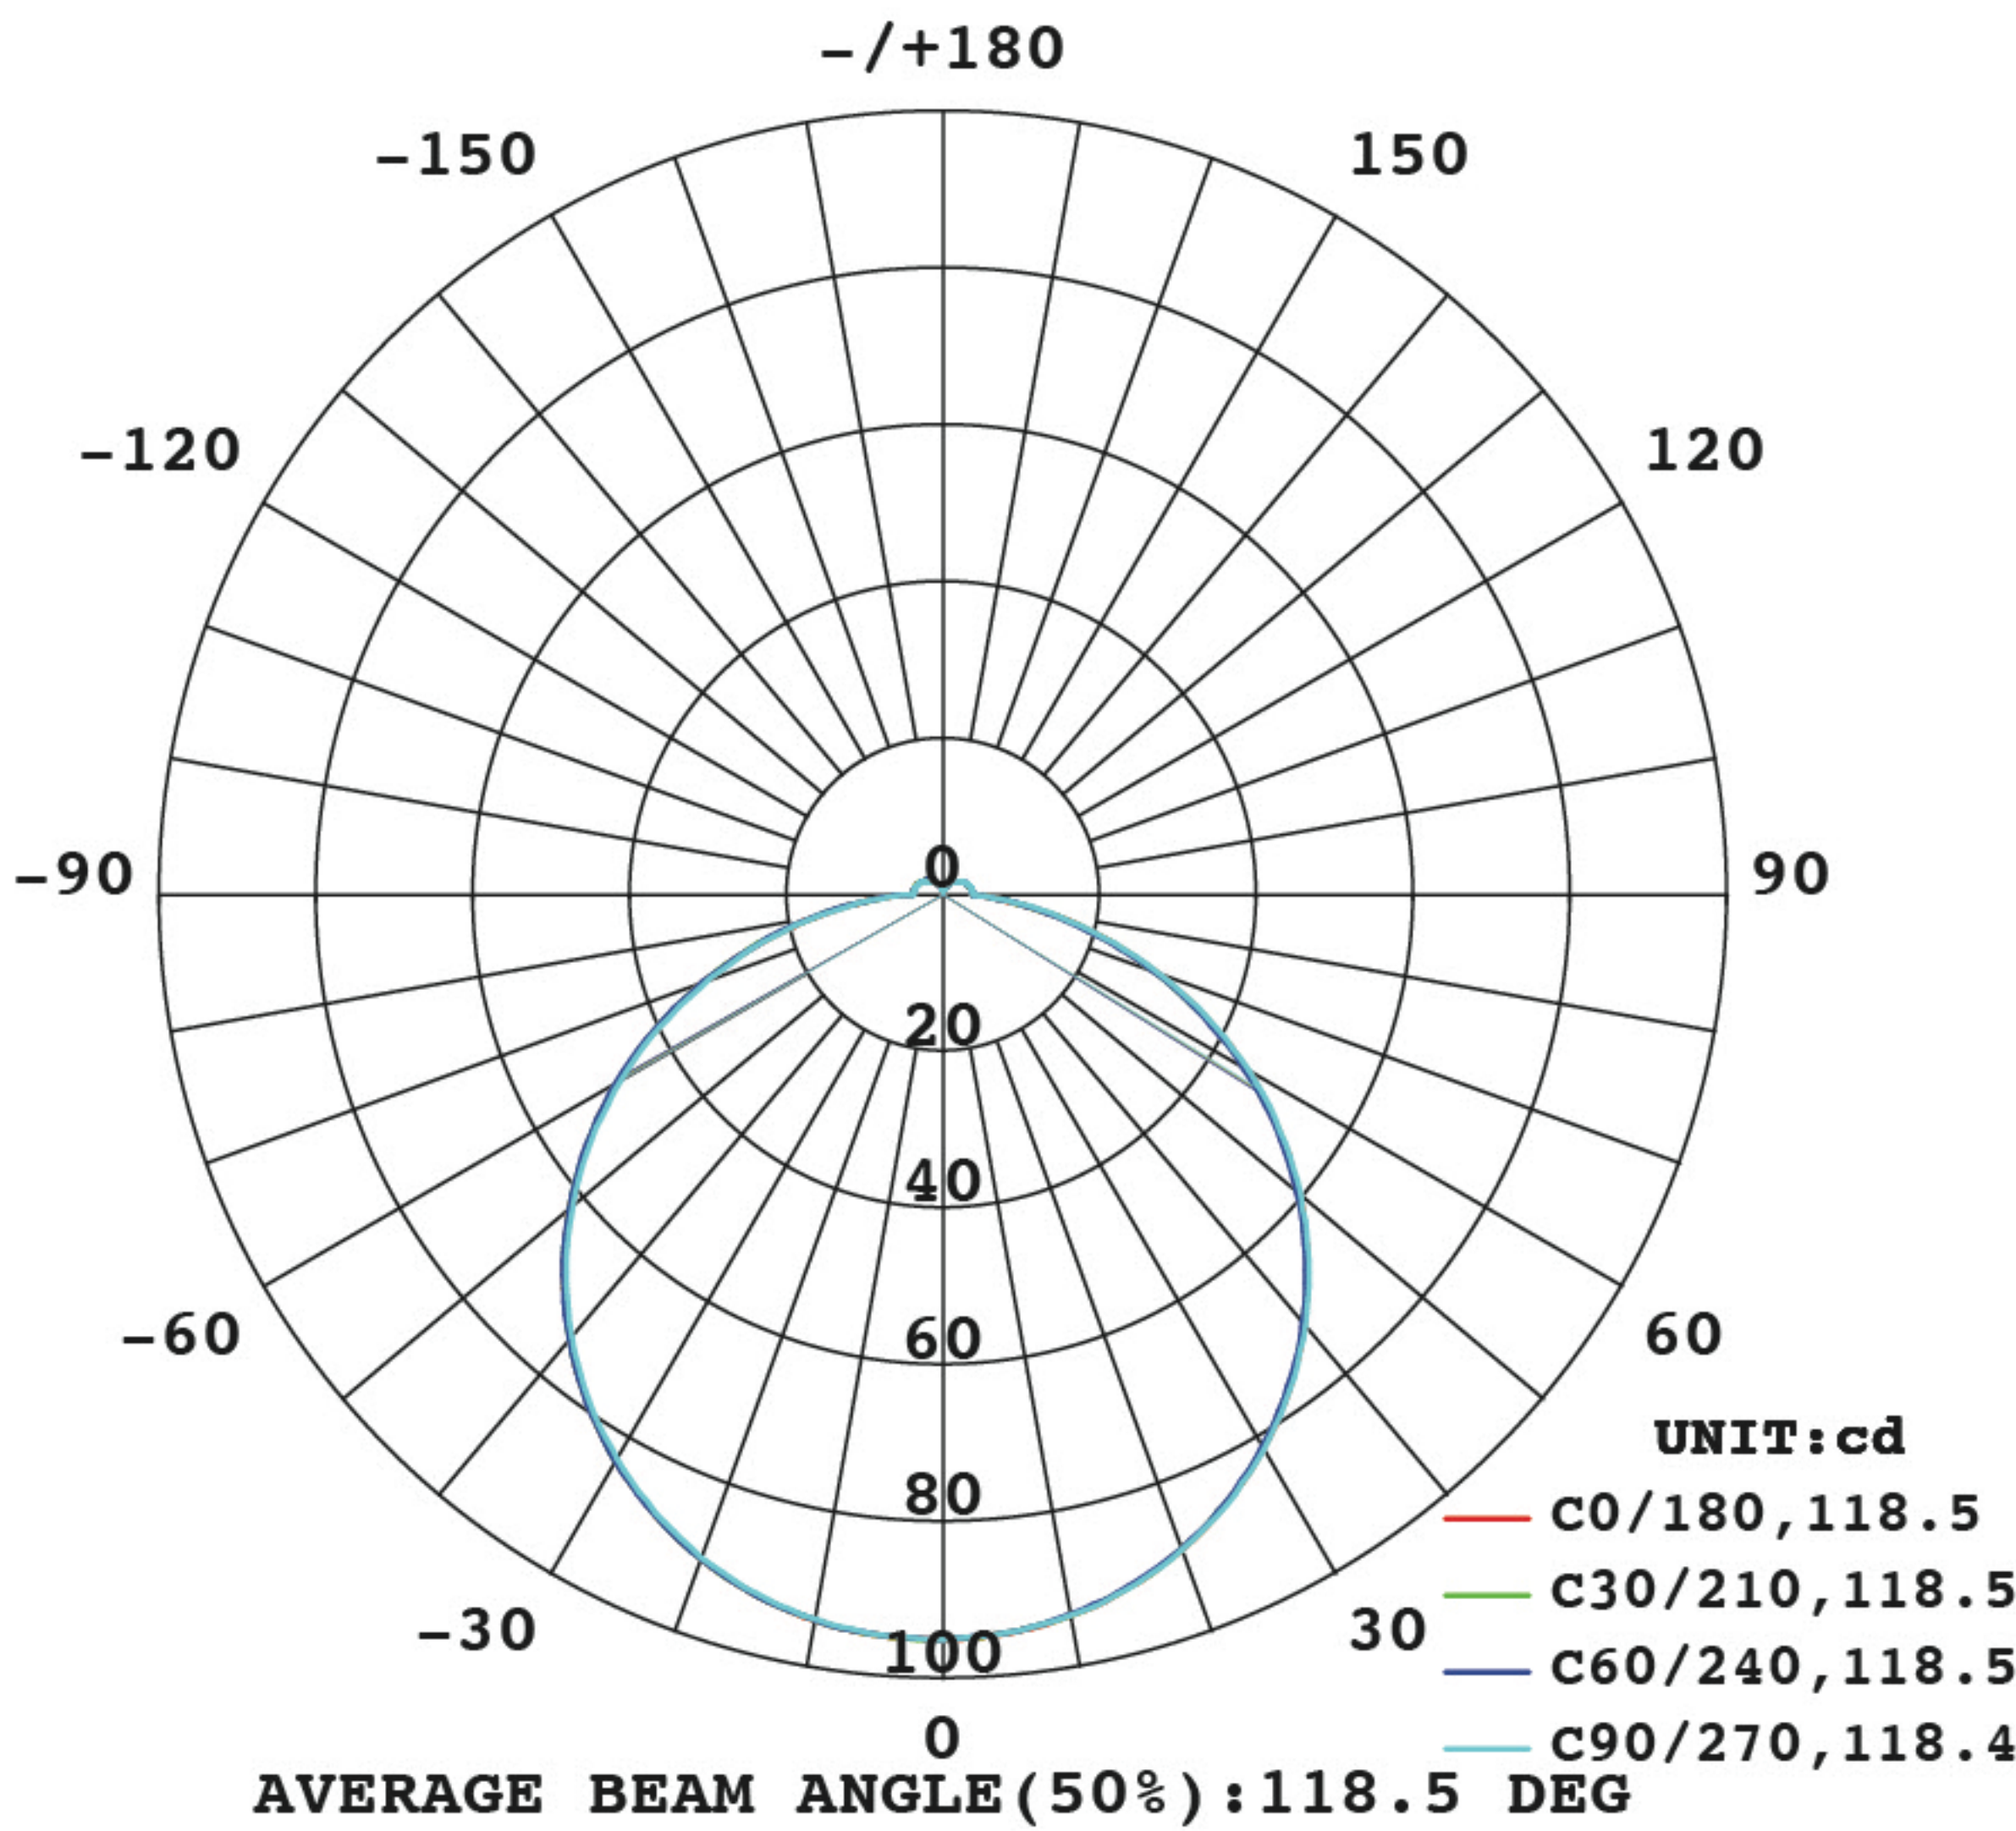

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

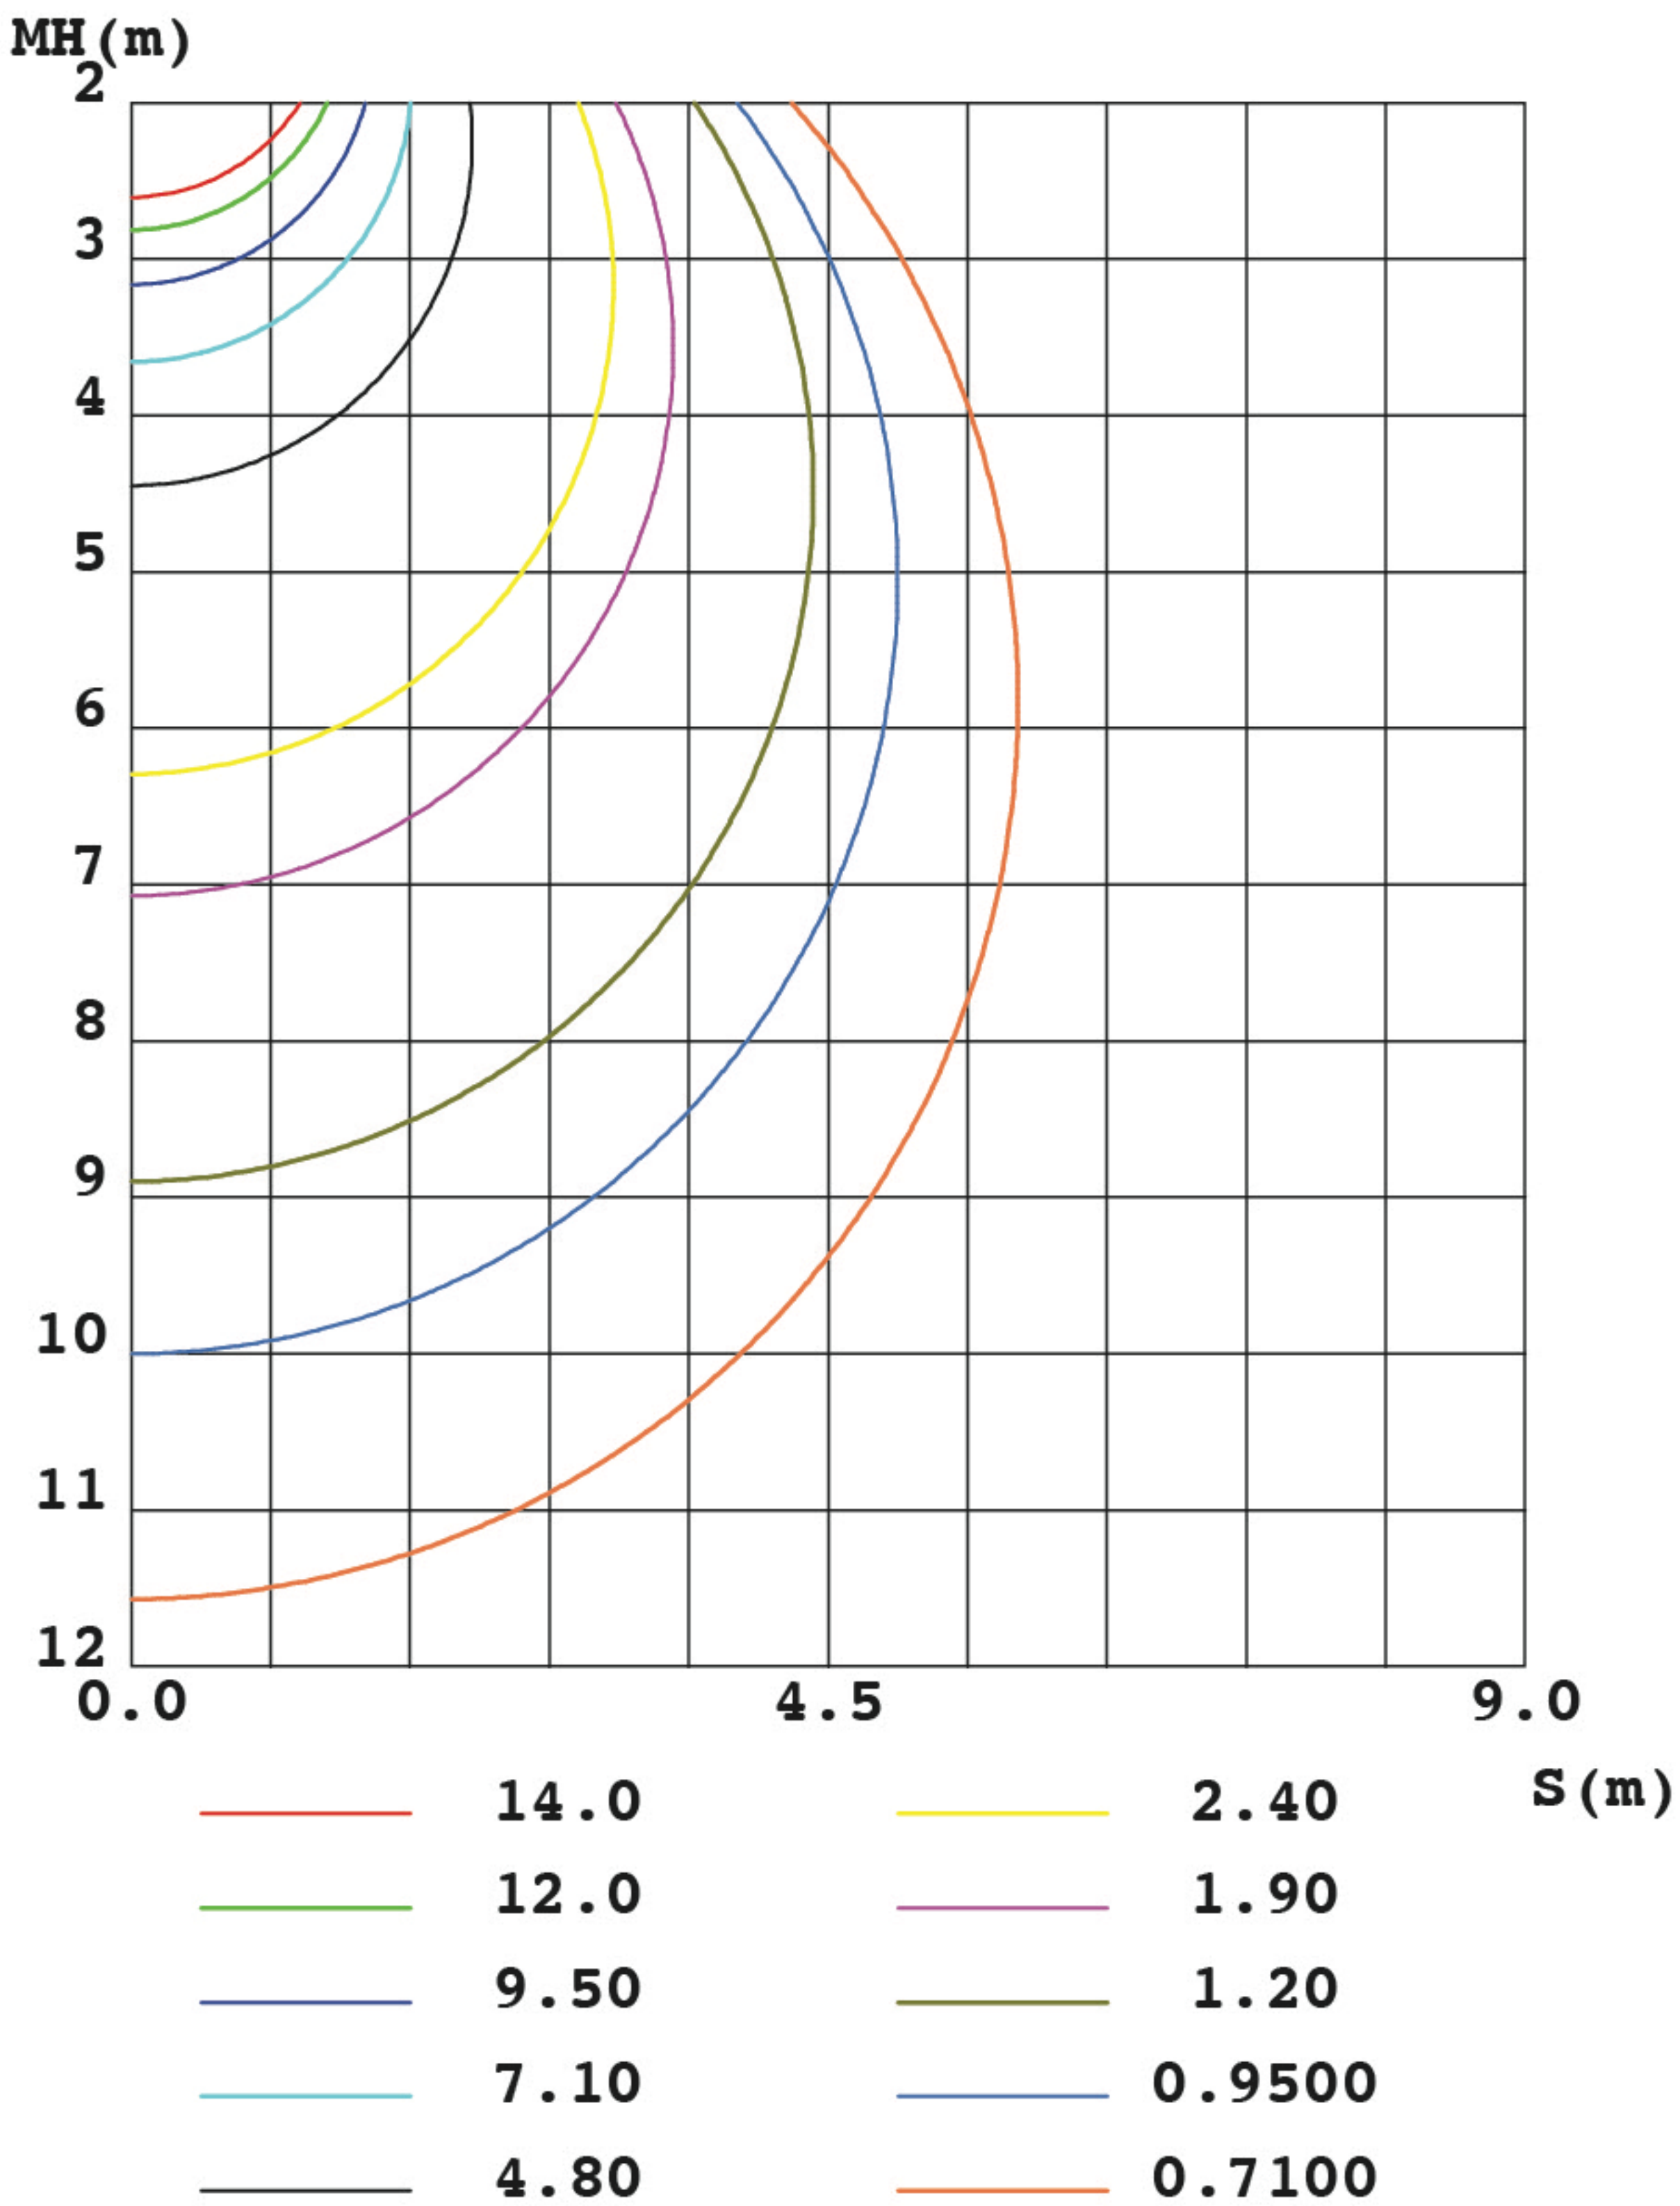

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Mr.Ma
Test Date:18 April 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.100m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	93.49	93.38	93.48	93.62	94.06	94.05	93.91	93.82	0- 10	9.009	9.009	2.87,2.87
20	89.01	88.87	89.05	89.39	90.21	90.29	90.04	89.77	10- 20	25.99	35.00	11.2,11.2
30	81.69	81.51	81.81	82.28	83.55	83.60	83.24	82.84	20- 30	39.85	74.84	23.8,23.8
40	71.68	71.47	71.91	72.49	74.12	74.21	73.73	73.21	30- 40	48.83	123.7	39.4,39.4
50	59.31	59.03	59.55	60.33	62.18	62.29	61.76	61.10	40- 50	51.72	175.4	55.9,55.9
60	44.75	44.49	45.06	45.89	48.07	48.20	47.56	46.84	50- 60	48.03	223.4	71.2,71.2
70	28.79	28.57	29.19	30.05	32.36	32.56	31.89	31.07	60- 70	38.13	261.5	83.3,83.3
80	13.56	13.38	13.96	14.62	16.62	16.84	16.32	15.52	70- 80	23.90	285.5	91,91
90	3.810	3.836	3.894	3.994	4.499	4.619	4.366	4.070	80- 90	9.632	295.1	94,94
100	3.731	3.763	3.819	3.859	3.872	3.864	3.813	3.757	90-100	4.223	299.3	95.4,95.4
110	3.530	3.563	3.616	3.661	3.685	3.683	3.622	3.553	100-110	3.941	303.2	96.6,96.6
120	3.212	3.239	3.290	3.336	3.376	3.376	3.306	3.223	110-120	3.441	306.7	97.7,97.7
130	2.780	2.802	2.851	2.895	2.947	2.950	2.880	2.799	120-130	2.773	309.5	98.6,98.6
140	2.269	2.287	2.330	2.372	2.428	2.437	2.368	2.306	130-140	2.030	311.5	99.3,99.3
150	1.708	1.715	1.752	1.789	1.849	1.858	1.802	1.749	140-150	1.305	312.8	99.7,99.7
160	1.158	1.157	1.176	1.207	1.260	1.276	1.236	1.205	150-160	0.6987	313.5	99.9,99.9
170	0.6972	0.6888	0.6927	0.7073	0.7540	0.7604	0.7443	0.7338	160-170	0.2782	313.8	100,100
180	0.5411	0.5463	0.5616	0.5647	0.5432	0.5452	0.5637	0.5657	170-180	0.0587	313.8	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 149.58 lm

%lum = 47.7%
%lamp = 47.7%


Conical surface Flux(130deg): 244.06 lm

%lum = 77.8%
%lamp = 77.8%

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 30.0DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:65.0%
Operators:Mr.Ma	Test Distance:6.100m [K=1.0000]
Test Date:18 April 2024	Remarks:

LUMINANCE LIMITATION CURVES

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:313.833x1 lm		
NAME: Slice Circle IV+ WW 2W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:

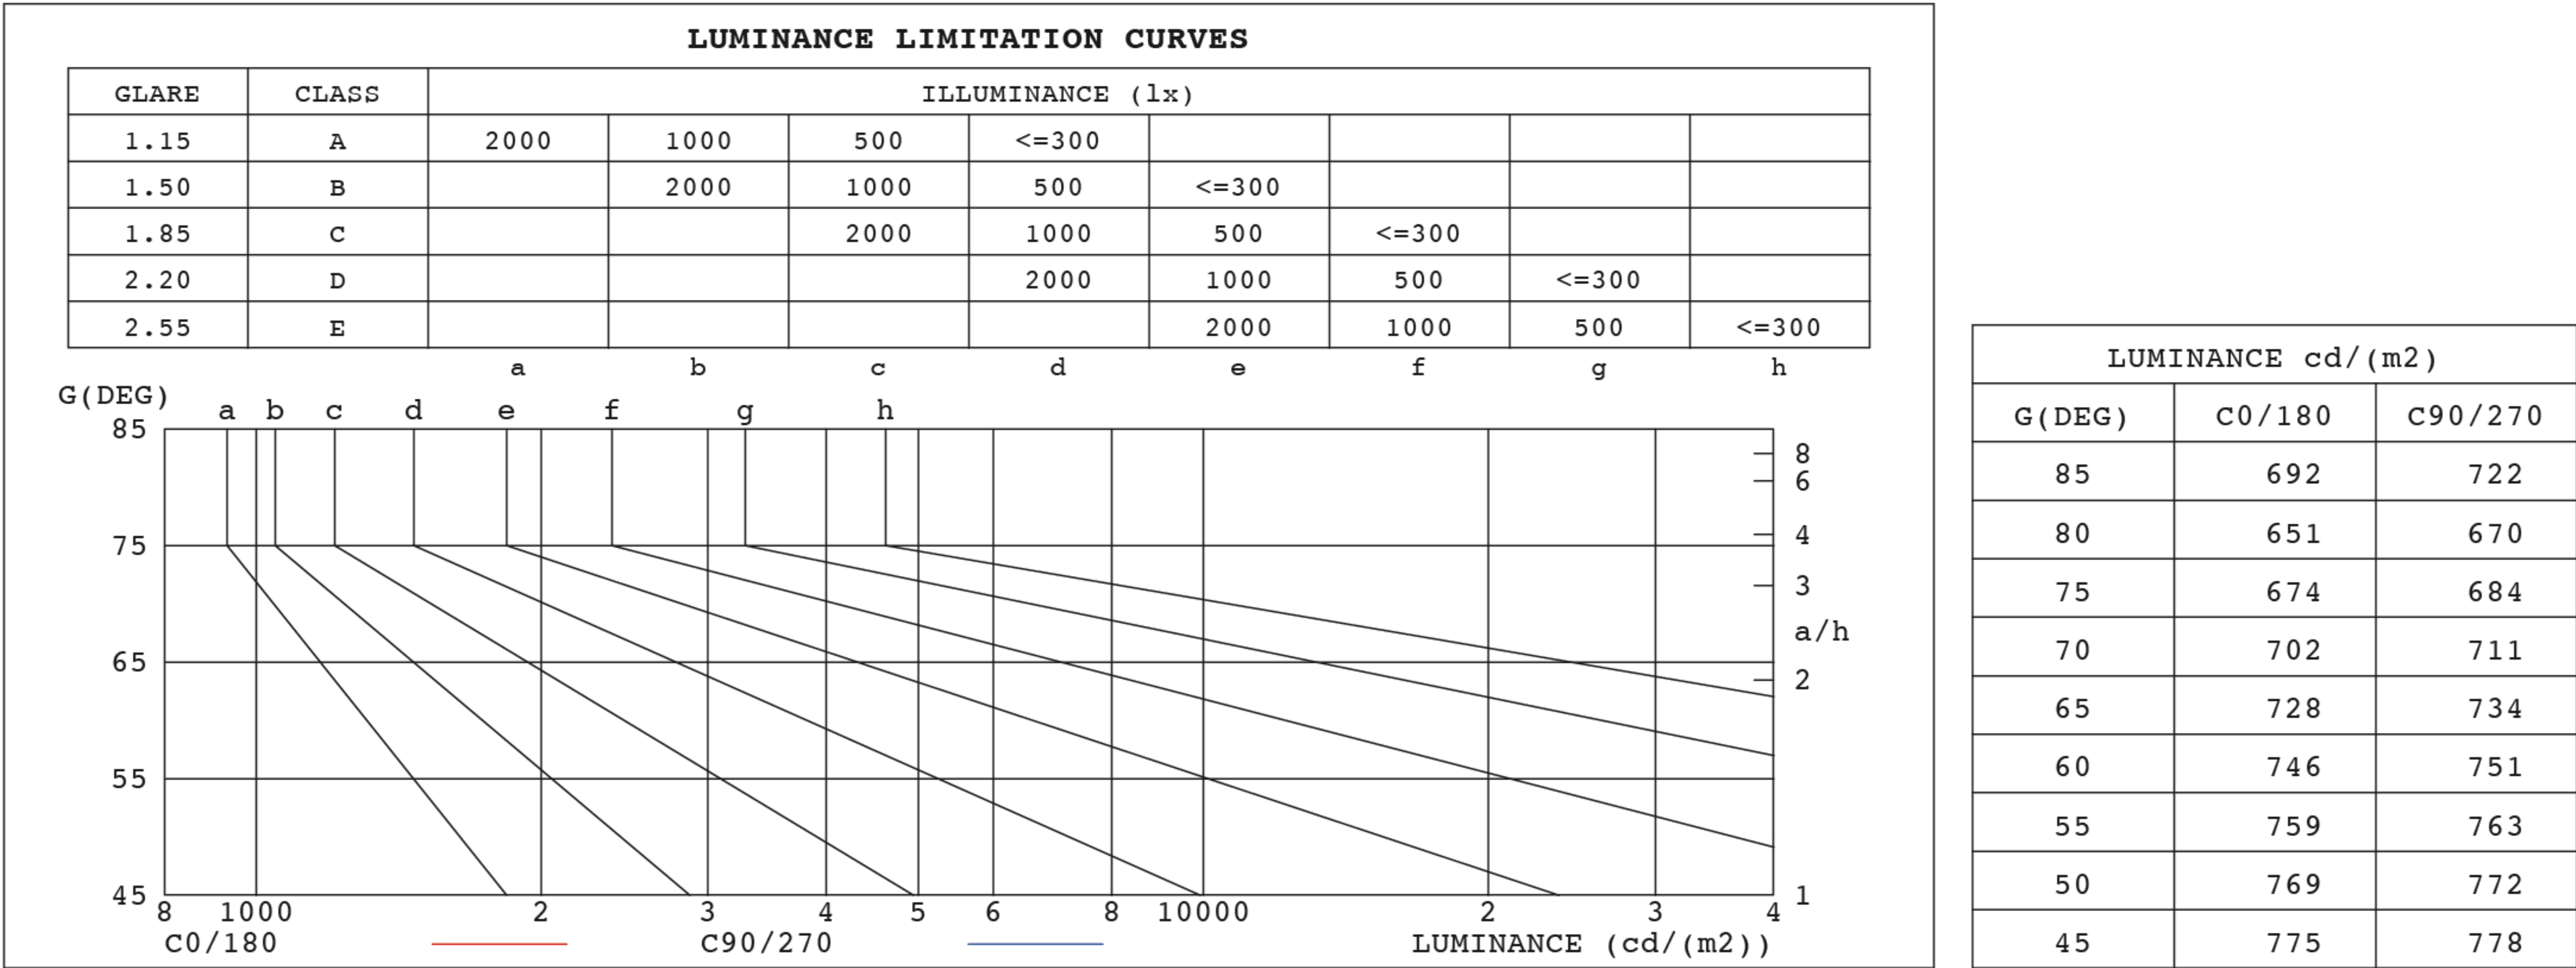


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Mr.Ma
Test Date:18 April 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.100m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz		
Lamp Flux:313.833x1 lm		
NAME: Slice Circle IV+ WW 2W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.18	1.18	1.18	1.14	1.14	1.14	1.08	1.08	1.08	1.02	1.02	1.02	.97	.97	.97	.94
1.0	1.02	.97	.93	.99	.95	.91	.93	.90	.87	.88	.86	.83	.84	.82	.80	.77
2.0	.88	.81	.75	.86	.79	.73	.81	.76	.71	.77	.72	.68	.73	.69	.66	.63
3.0	.77	.68	.62	.75	.67	.61	.71	.64	.59	.67	.62	.57	.64	.59	.55	.53
4.0	.68	.59	.52	.66	.58	.51	.63	.56	.50	.60	.54	.49	.57	.52	.47	.45
5.0	.60	.51	.44	.59	.50	.44	.56	.49	.43	.53	.47	.42	.51	.45	.41	.39
6.0	.54	.45	.39	.53	.44	.38	.51	.43	.37	.48	.42	.37	.46	.40	.36	.34
7.0	.49	.40	.34	.48	.40	.34	.46	.38	.33	.44	.37	.32	.42	.36	.32	.30
8.0	.45	.36	.30	.44	.36	.30	.42	.35	.29	.40	.34	.29	.39	.33	.28	.26
9.0	.41	.33	.27	.40	.32	.27	.39	.31	.26	.37	.31	.26	.36	.30	.25	.24
10.0	.38	.30	.24	.37	.29	.24	.36	.29	.24	.34	.28	.23	.33	.27	.23	.21

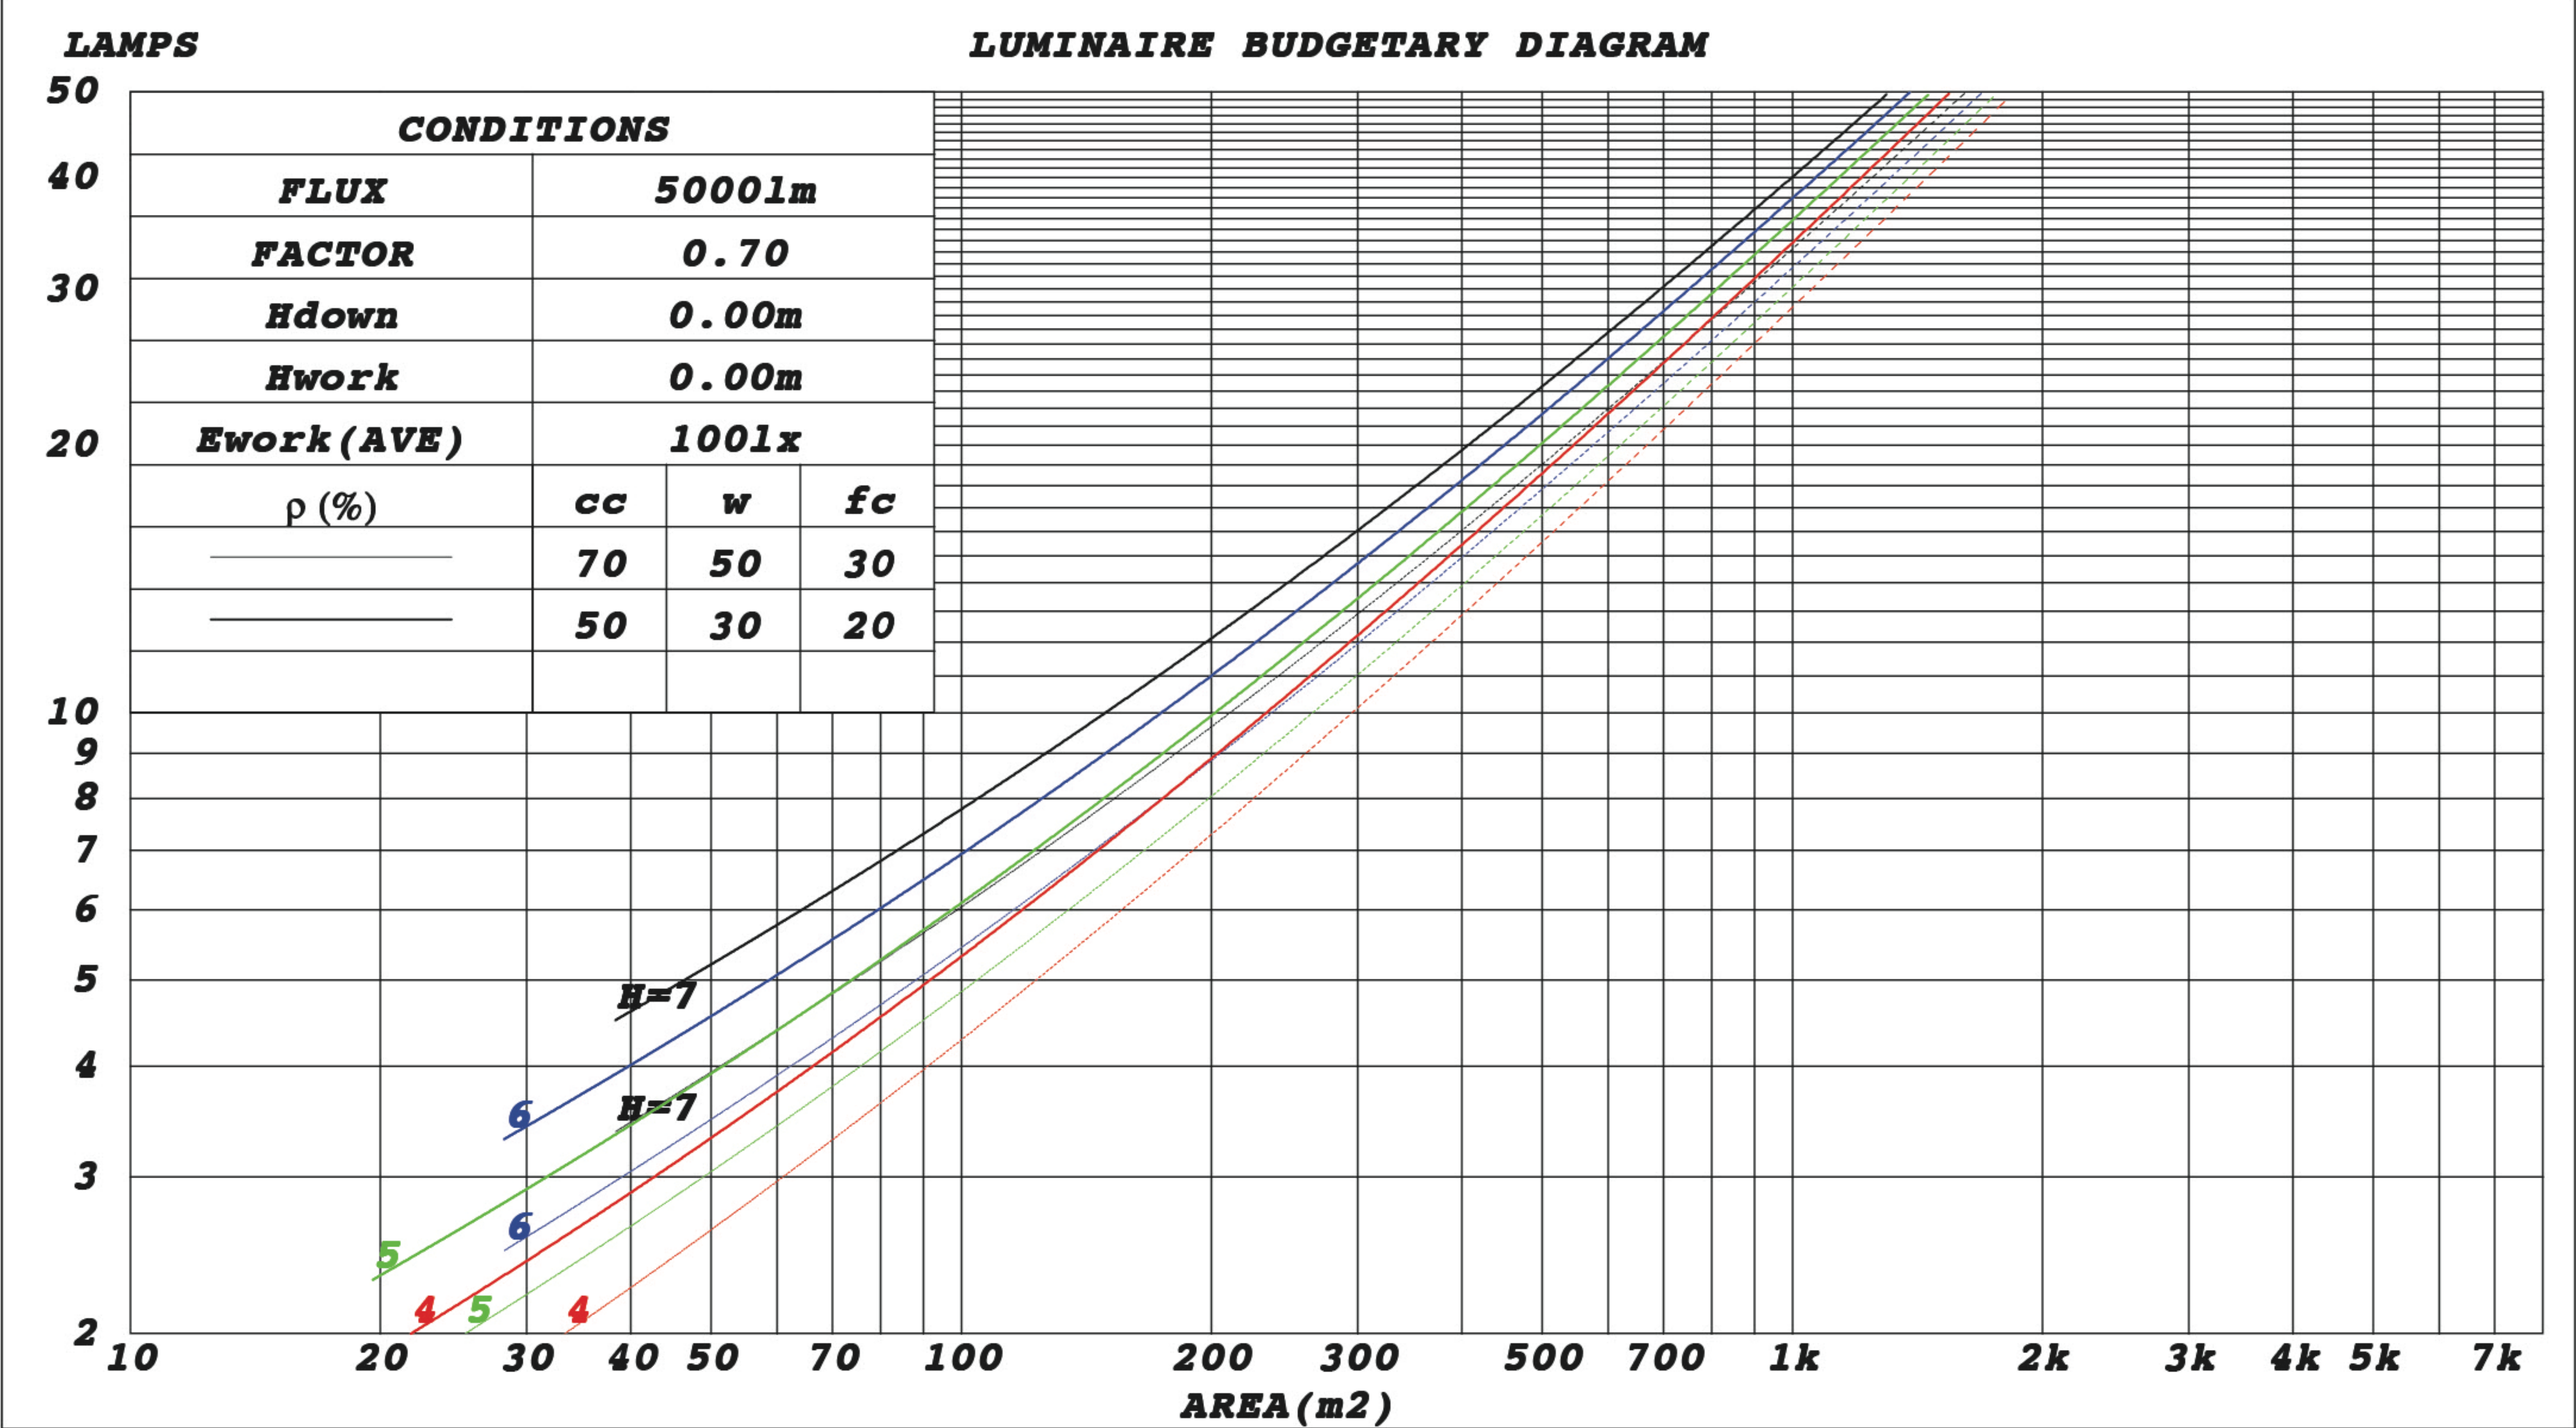

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Mr.Ma
Test Date:18 April 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.100m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:313.833x1 lm														
NAME: Slice Circle IV+ WW 2W					TYPE:					WEIGHT:				
SPEC.:					DIM.:					SERIAL No.:				
MFR.: PURATI PTY LTD					SUR.:					Shielding Angle:				

ρ_{cc}	80%			70%			50%			30%			10%			0			
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0			
ρ_{fc}	20%			20%			20%			20%			20%			0			
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)												
0.0																			
1.0	.328	.186	.059	.319	.182	.058	.302	.173	.055	.287	.165	.053	.272	.158	.051				
2.0	.302	.166	.051	.294	.162	.050	.279	.155	.048	.265	.149	.047	.253	.143	.045				
3.0	.277	.147	.044	.270	.144	.043	.256	.139	.042	.244	.134	.041	.232	.129	.040				
4.0	.254	.132	.039	.247	.129	.038	.235	.125	.037	.224	.120	.036	.214	.116	.035				
5.0	.234	.119	.034	.228	.117	.034	.217	.113	.033	.207	.109	.033	.198	.106	.032				
6.0	.216	.108	.031	.211	.107	.031	.201	.103	.030	.192	.100	.029	.184	.097	.029				
7.0	.201	.099	.028	.196	.098	.028	.187	.095	.027	.179	.092	.027	.171	.089	.026				
8.0	.187	.091	.026	.183	.090	.025	.175	.087	.025	.167	.085	.024	.160	.082	.024				
9.0	.175	.085	.024	.171	.083	.023	.164	.081	.023	.157	.079	.023	.151	.077	.022				
10.0	.164	.079	.022	.161	.078	.022	.154	.076	.021	.148	.073	.021	.142	.071	.021				

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.236	.236	.236	.202	.202	.202	.138	.138	.138	.079	.079	.079	.025	.025	.025	
1.0	.227	.202	.179	.195	.173	.154	.133	.119	.106	.077	.069	.062	.025	.022	.020	
2.0	.220	.178	.143	.188	.153	.124	.129	.106	.086	.074	.062	.051	.024	.020	.016	
3.0	.212	.161	.120	.182	.139	.104	.125	.096	.073	.072	.056	.043	.023	.018	.014	
4.0	.205	.148	.104	.176	.128	.091	.121	.089	.064	.070	.052	.038	.022	.017	.012	
5.0	.197	.138	.093	.169	.119	.081	.117	.083	.057	.068	.049	.034	.022	.016	.011	
6.0	.190	.129	.086	.163	.112	.075	.113	.078	.053	.065	.046	.031	.021	.015	.010	
7.0	.183	.123	.080	.158	.106	.070	.109	.074	.049	.063	.044	.029	.020	.014	.010	
8.0	.177	.117	.076	.152	.101	.066	.105	.071	.047	.061	.042	.028	.020	.014	.009	
9.0	.171	.112	.072	.147	.097	.063	.102	.068	.045	.059	.040	.027	.019	.013	.009	
10.0	.165	.108	.070	.142	.094	.061	.099	.066	.043	.057	.039	.026	.019	.013	.009	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Mr.Ma
Test Date:18 April 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.100m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz										
Lamp Flux:313.833x1 lm										
NAME: Slice Circle IV+ WW 2W					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: PURATI PTY LTD					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.5	17.0	15.9	17.3	17.6	15.5	17.0	15.9	17.3	17.6
3H	17.1	18.5	17.5	18.8	19.2	17.1	18.5	17.5	18.8	19.2
4H	17.8	19.1	18.2	19.4	19.8	17.8	19.1	18.2	19.5	19.8
6H	18.3	19.5	18.7	19.9	20.3	18.4	19.6	18.8	19.9	20.3
8H	18.5	19.7	18.9	20.1	20.5	18.6	19.7	19.0	20.1	20.5
12H	18.7	19.8	19.1	20.2	20.6	18.7	19.9	19.2	20.3	20.7
4H 2H	16.1	17.4	16.5	17.8	18.2	16.1	17.4	16.5	17.8	18.2
3H	17.9	19.0	18.4	19.4	19.9	17.9	19.0	18.4	19.4	19.9
4H	18.7	19.7	19.2	20.2	20.6	18.7	19.7	19.2	20.2	20.6
6H	19.4	20.3	19.9	20.7	21.2	19.4	20.3	19.9	20.8	21.3
8H	19.6	20.5	20.1	21.0	21.5	19.7	20.5	20.2	21.0	21.5
12H	19.8	20.6	20.4	21.1	21.7	19.9	20.7	20.4	21.2	21.7
8H 4H	19.0	19.8	19.5	20.3	20.8	19.0	19.8	19.5	20.3	20.8
6H	19.8	20.5	20.3	21.0	21.6	19.8	20.5	20.4	21.1	21.6
8H	20.2	20.8	20.7	21.3	21.9	20.2	20.8	20.8	21.4	21.9
12H	20.5	21.1	21.1	21.6	22.2	20.6	21.1	21.1	21.6	22.3
12H 4H	19.0	19.8	19.5	20.3	20.8	19.0	19.8	19.5	20.3	20.8
6H	19.9	20.5	20.4	21.0	21.6	19.9	20.5	20.5	21.1	21.6
8H	20.3	20.8	20.9	21.4	22.0	20.3	20.9	20.9	21.4	22.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 313.8 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -4.0)
Area: 0.12 m2

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 30.0DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:65.0%
Operators:Mr.Ma	Test Distance:6.100m [K=1.0000]
Test Date:18 April 2024	Remarks:

UTILIZATION FACTORS TABLE

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:313.833x1 lm		
NAME: Slice Circle IV+ WW 2W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	54	42	35	53	42	35	52	41	35	28
0.80	64	52	45	63	52	44	61	51	44	36
1.00	72	61	53	71	60	53	68	61	52	44
1.25	80	68	61	78	67	60	75	66	59	51
1.50	85	74	67	83	73	66	79	71	64	56
2.00	92	82	75	89	81	74	85	78	72	63
2.50	96	87	81	93	86	80	89	82	77	67
3.00	99	92	86	97	90	84	92	86	81	71
4.00	103	97	92	101	95	90	95	91	87	76
5.00	106	101	96	103	98	94	98	94	90	79
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Mr.Ma
Test Date:18 April 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.100m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:313.833x1 lm		
NAME: Slice Circle IV+ WW 2W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:

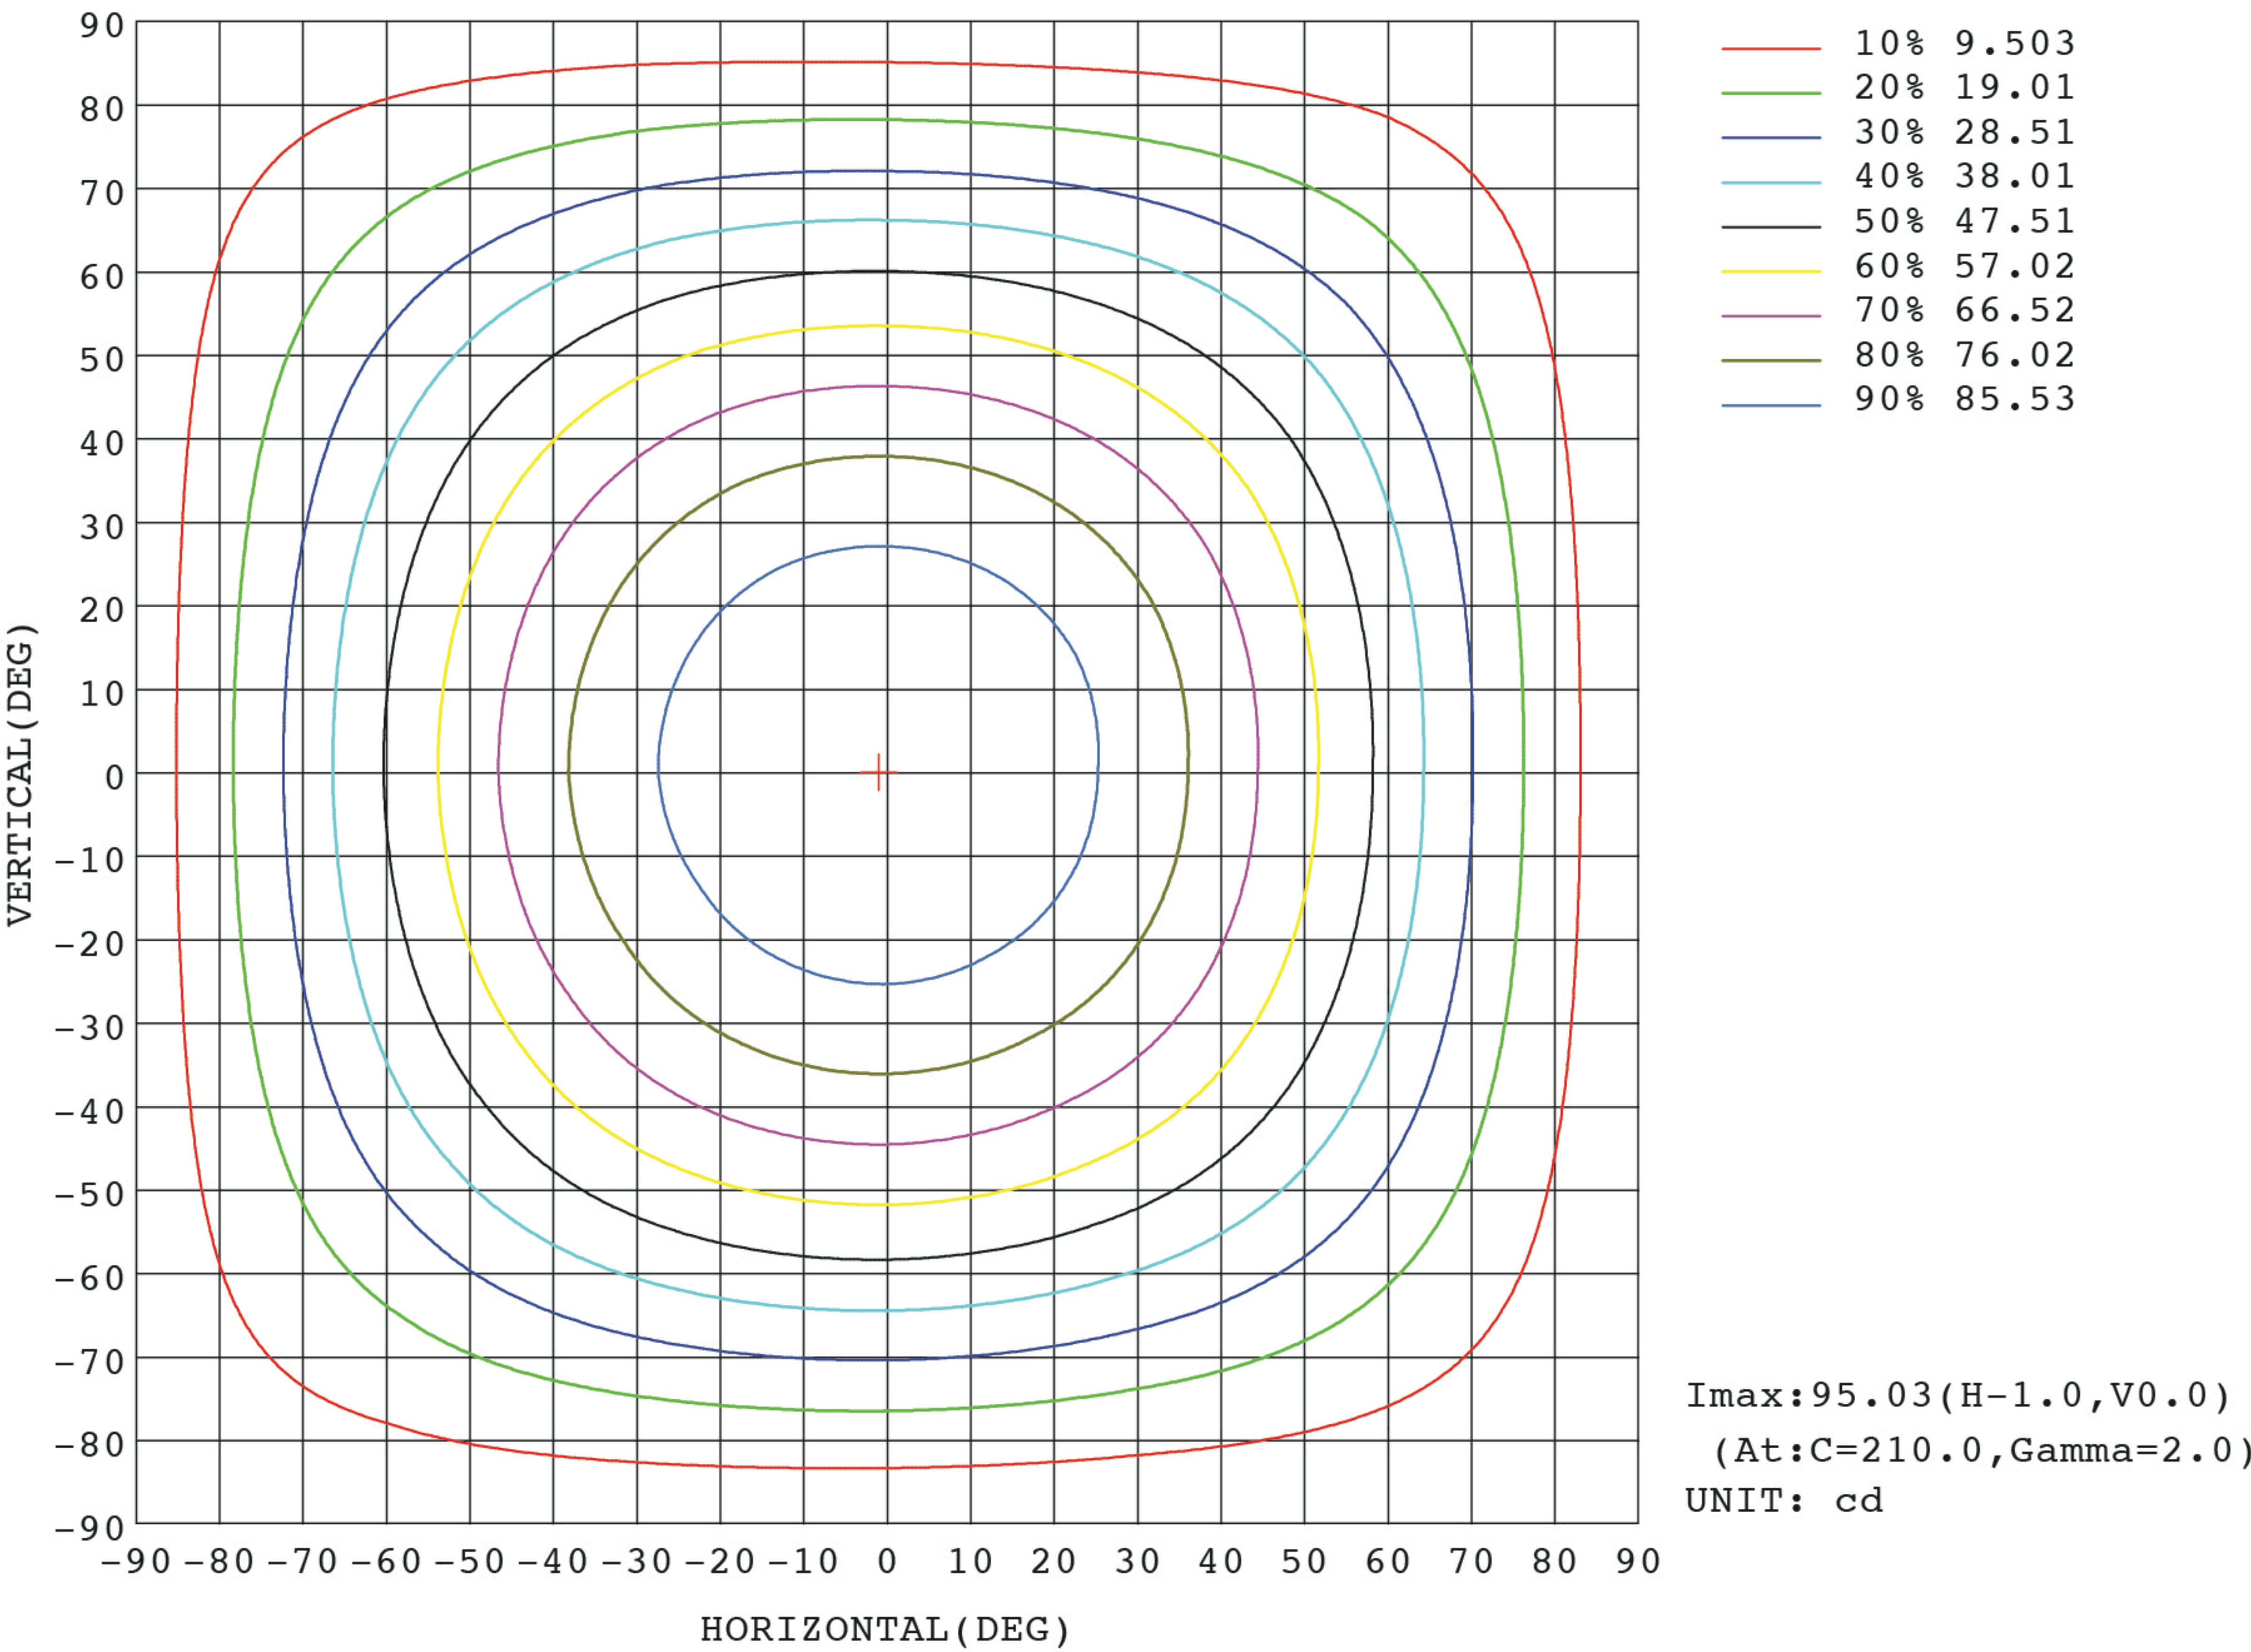


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Mr.Ma
Test Date:18 April 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.100m [K=1.0000]
Remarks:

AAI Figure

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:313.833x1 lm		
NAME: Slice Circle IV+ WW 2W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:

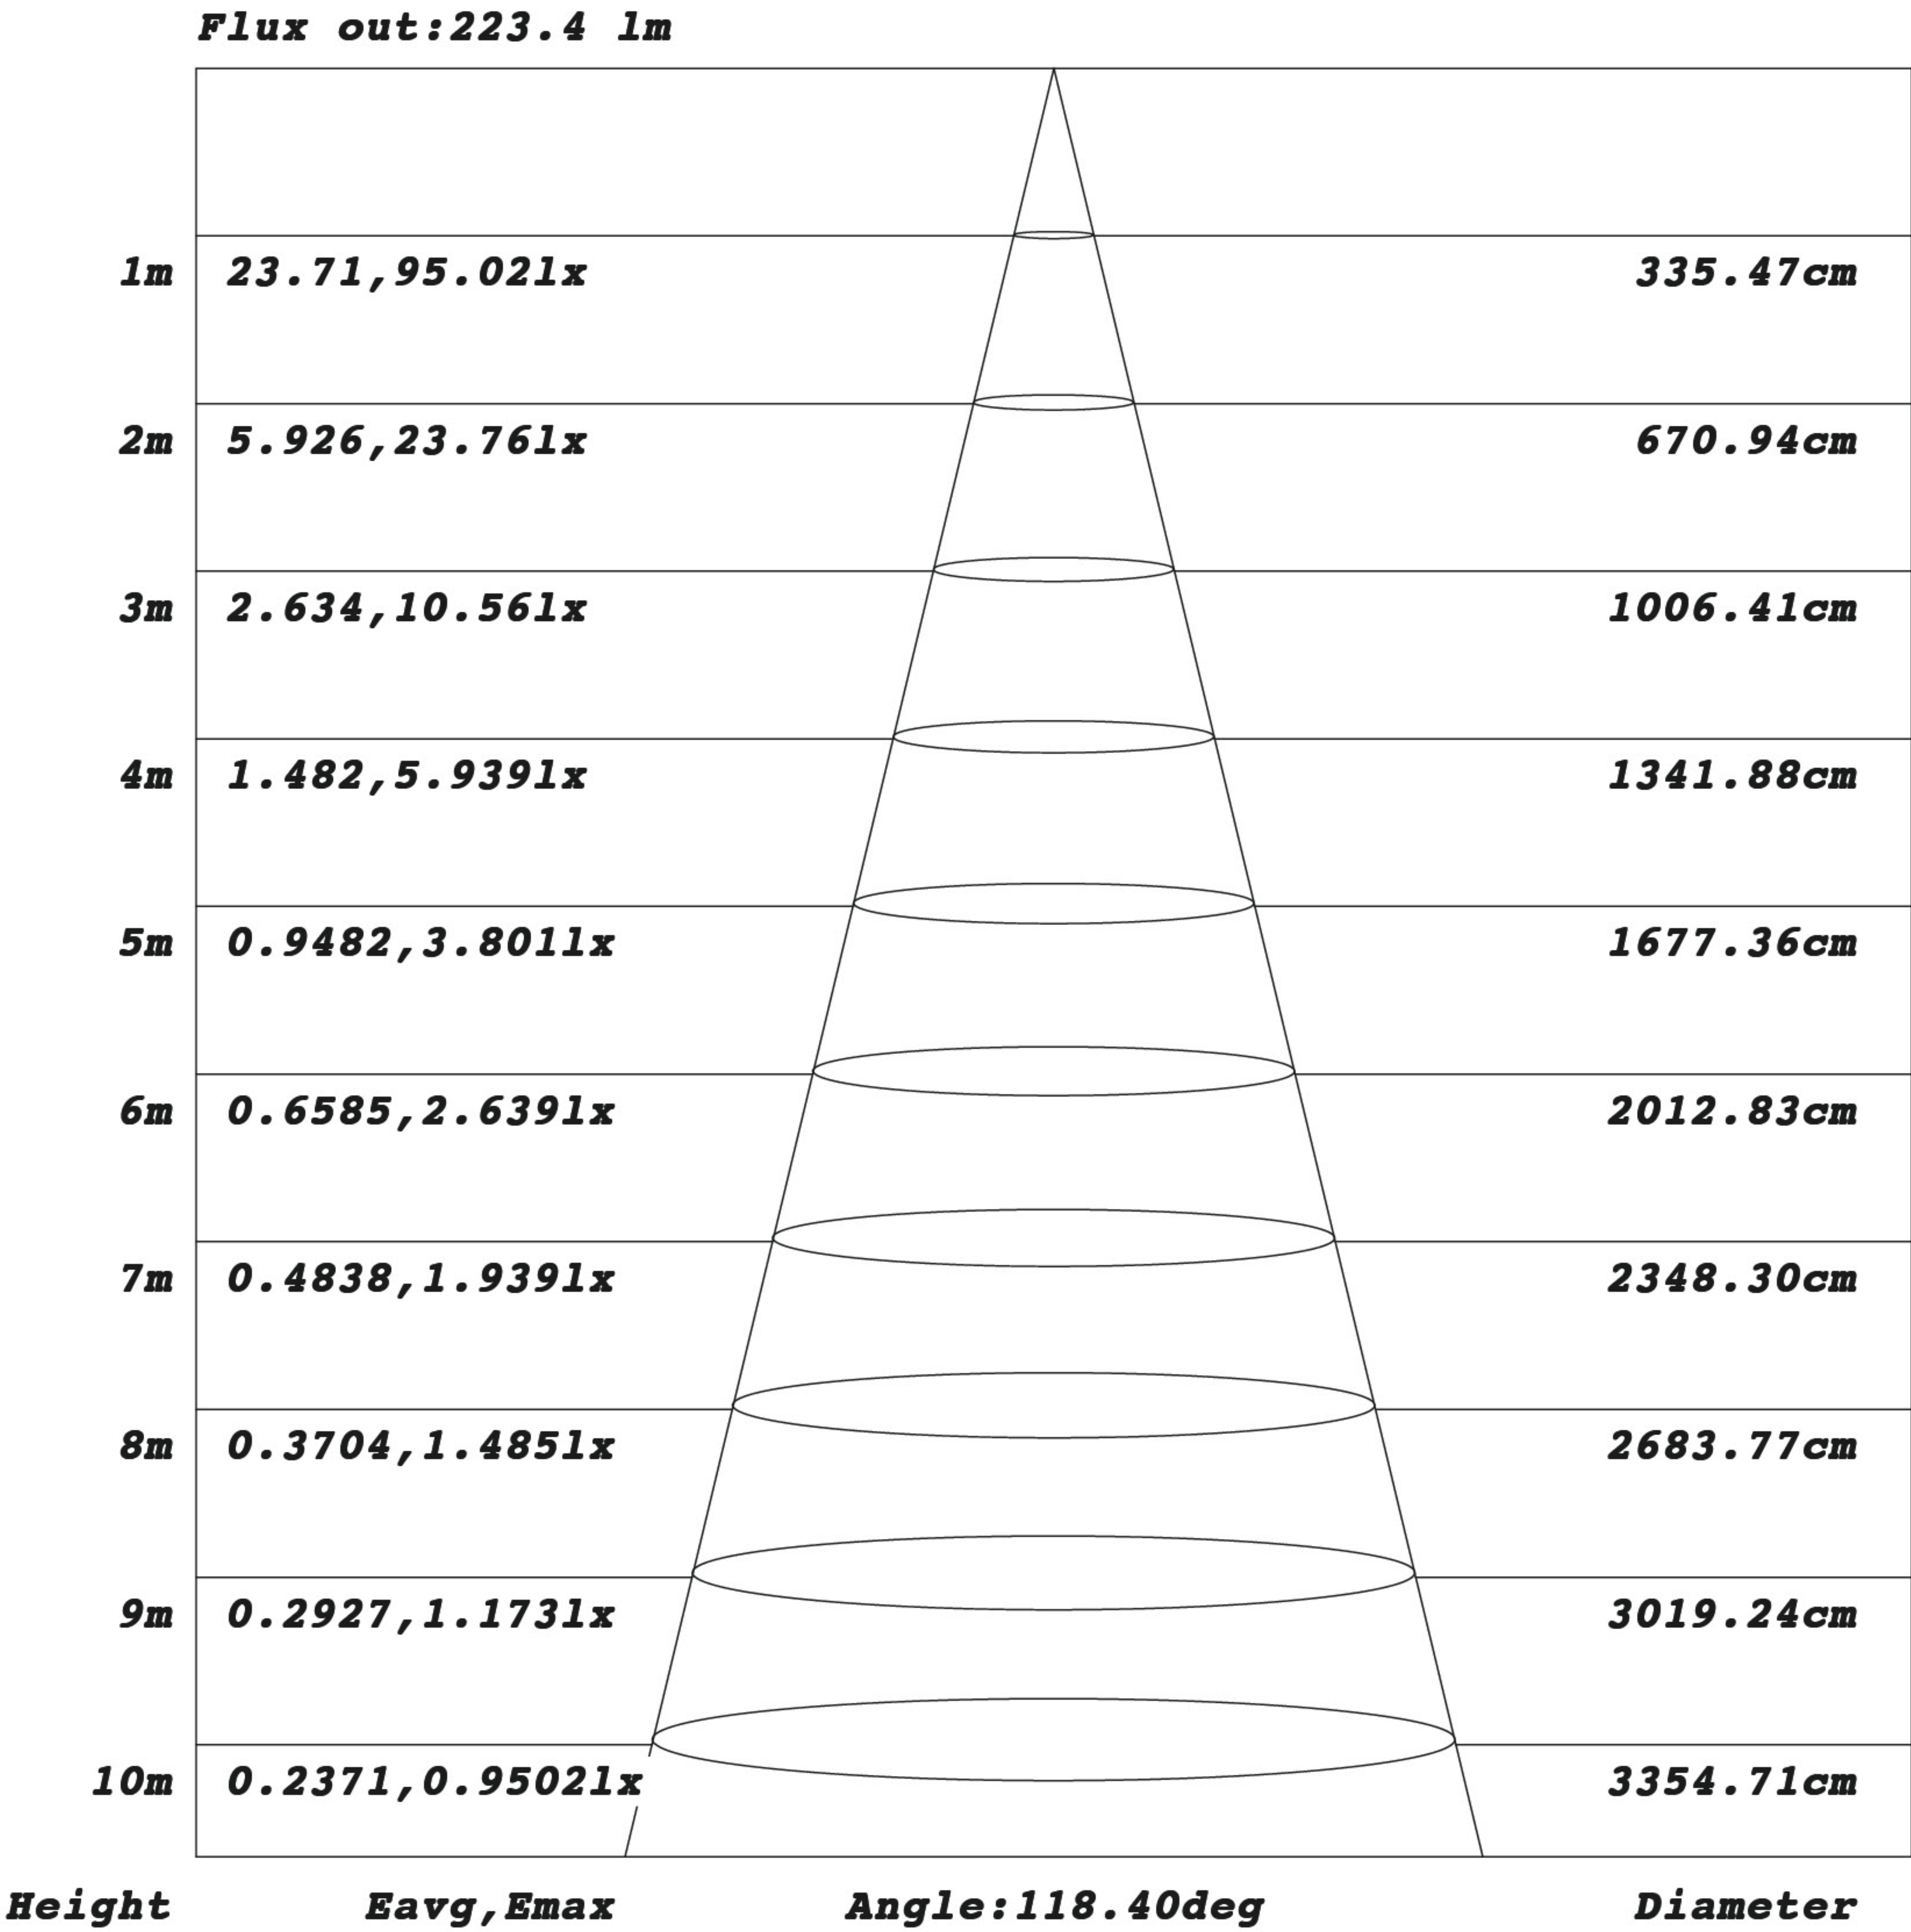


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Mr.Ma
Test Date:18 April 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.100m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz		
Lamp Flux:313.833x1 lm		
NAME: Slice Circle IV+ WW 2W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:

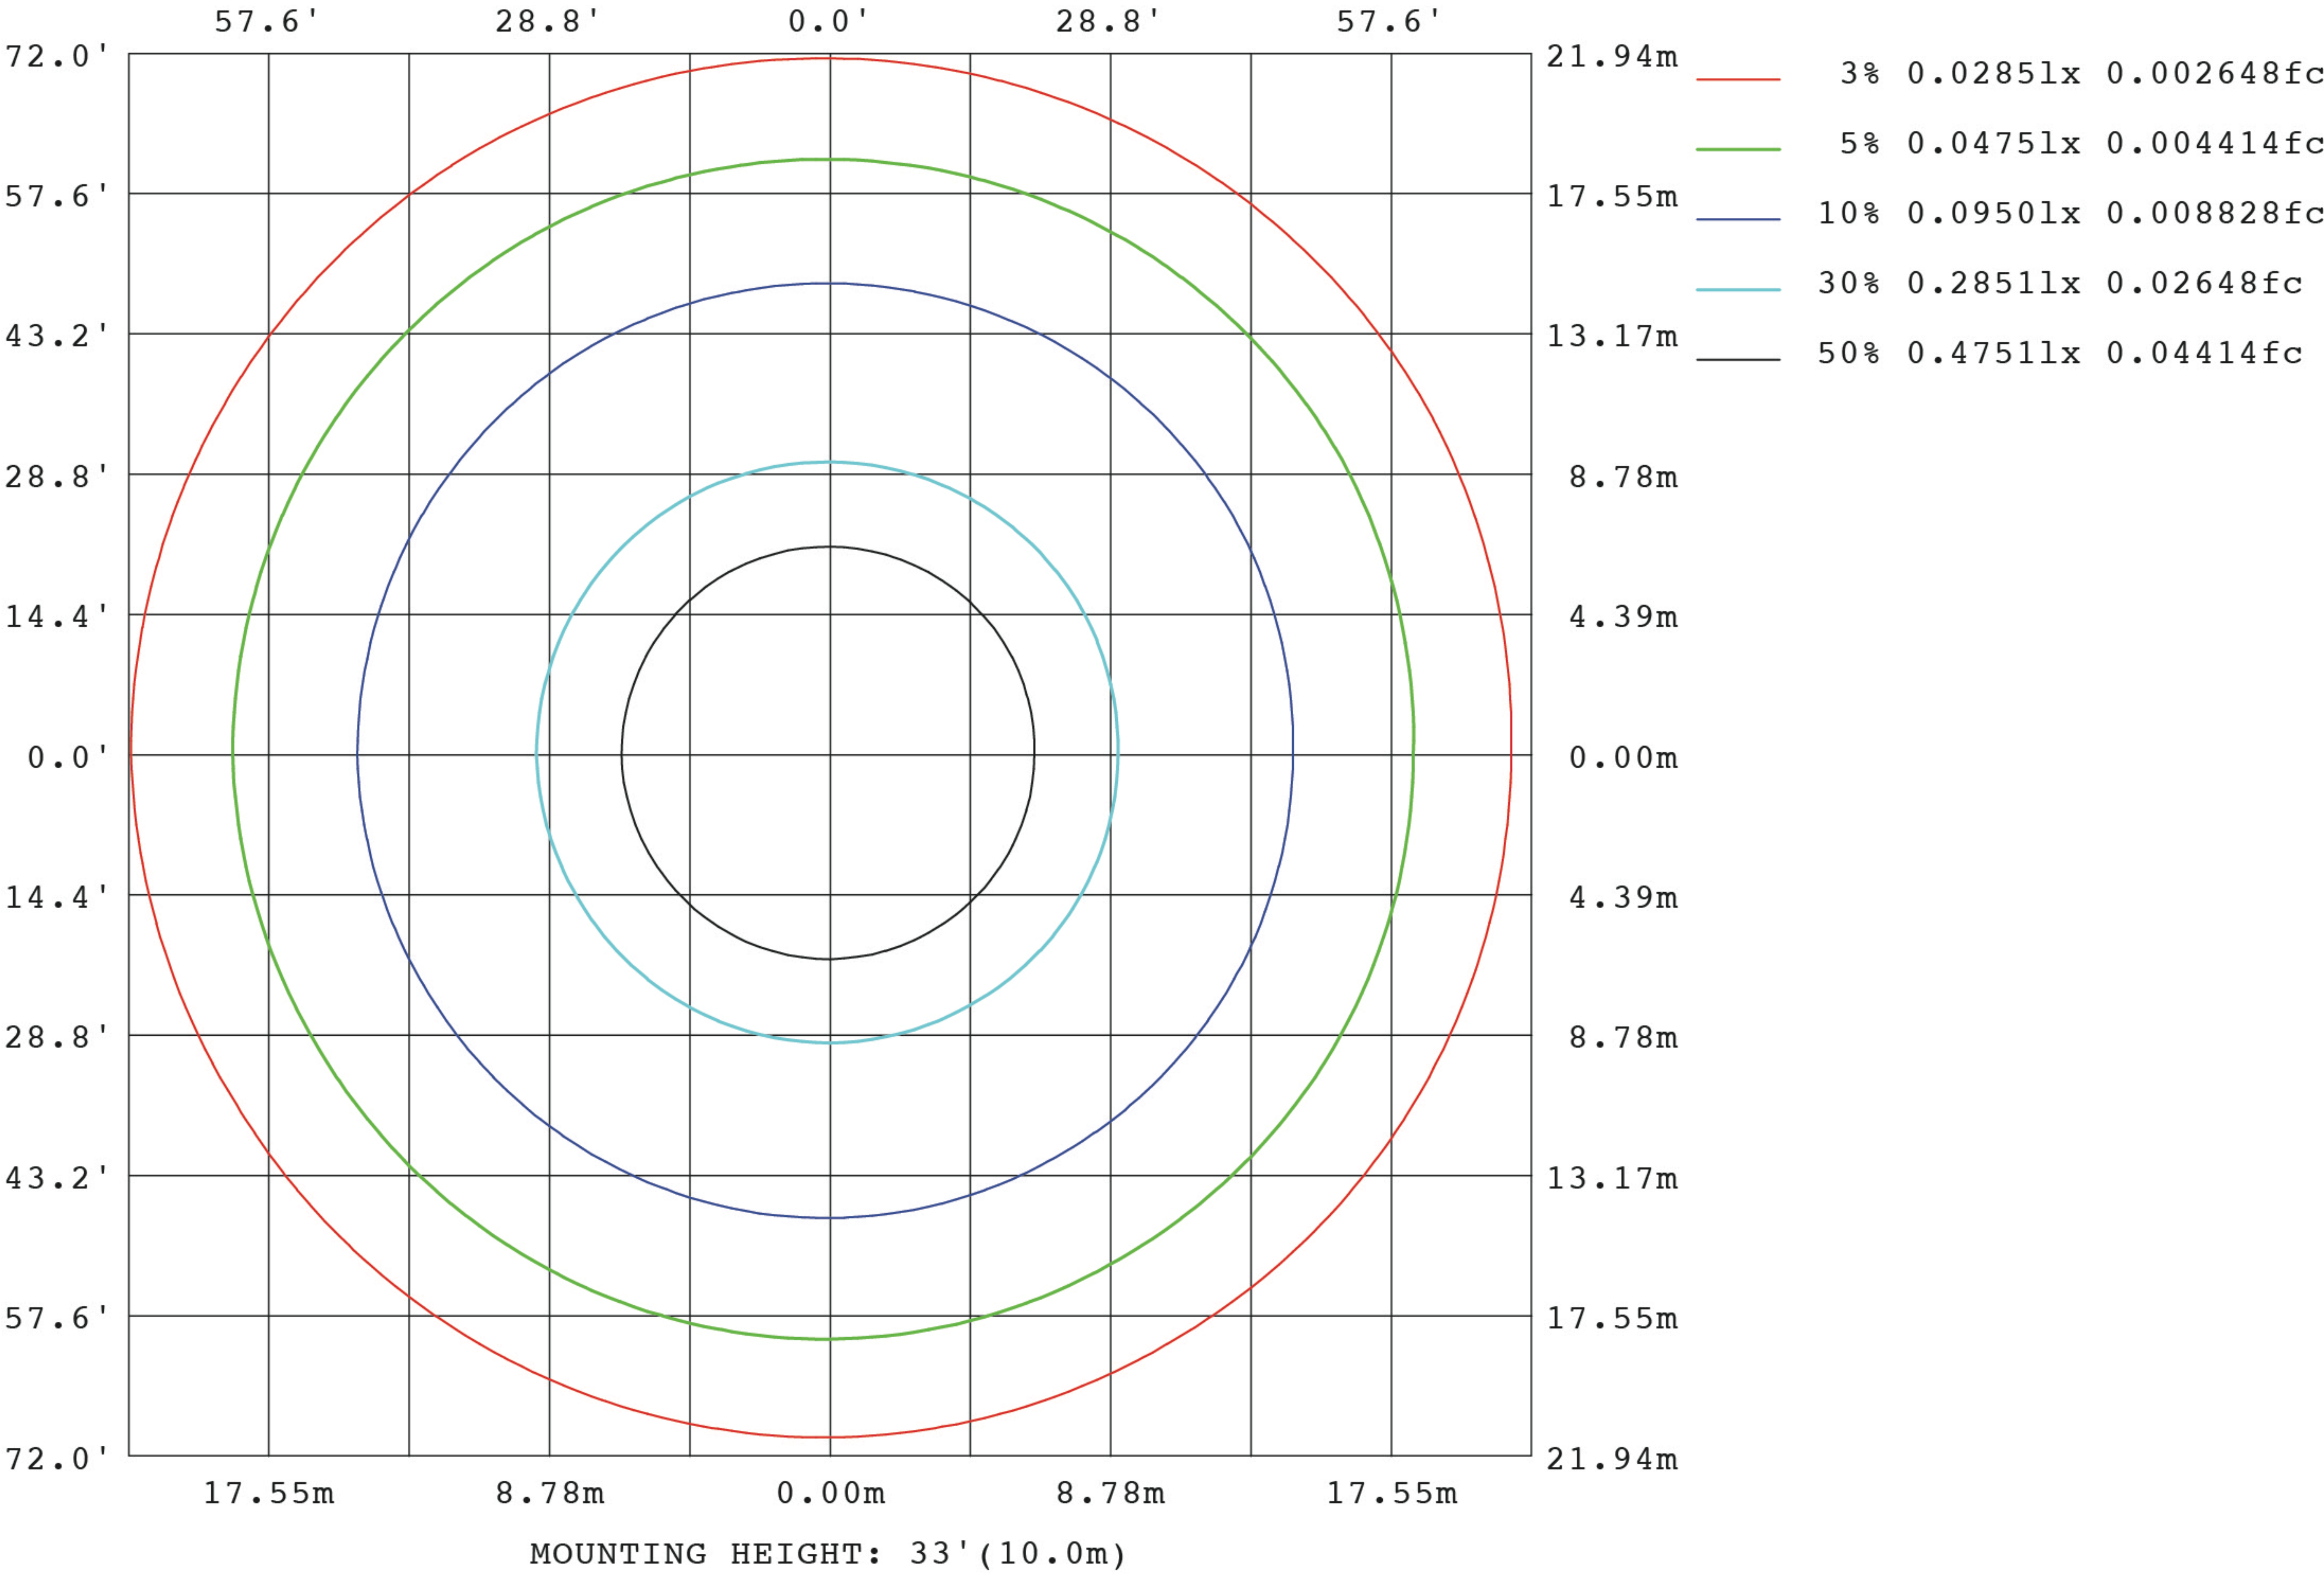

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Mr.Ma
Test Date:18 April 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.100m [K=1.0000]
Remarks:

LED Avg.L Report


Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:313.833x1 lm		
NAME: Slice Circle IV+ WW 2W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:

AvgL	cd/m2
L_0~180(65)av	761
L_0~180(75)av	727
L_0~180(85)av	810
L_90~270(65)av	759
L_90~270(75)av	727
L_90~270(85)av	819
L_45(65)av	760
L_45(75)av	727
L_45(85)av	816

Standard: GB/T 29293-2012

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 30.0DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Temperature:25.3℃	Humidity:65.0%
Operators:Mr.Ma	Test Distance:6.100m [K=1.0000]
Test Date:18 April 2024	Remarks:

Planar Illuminance Curve

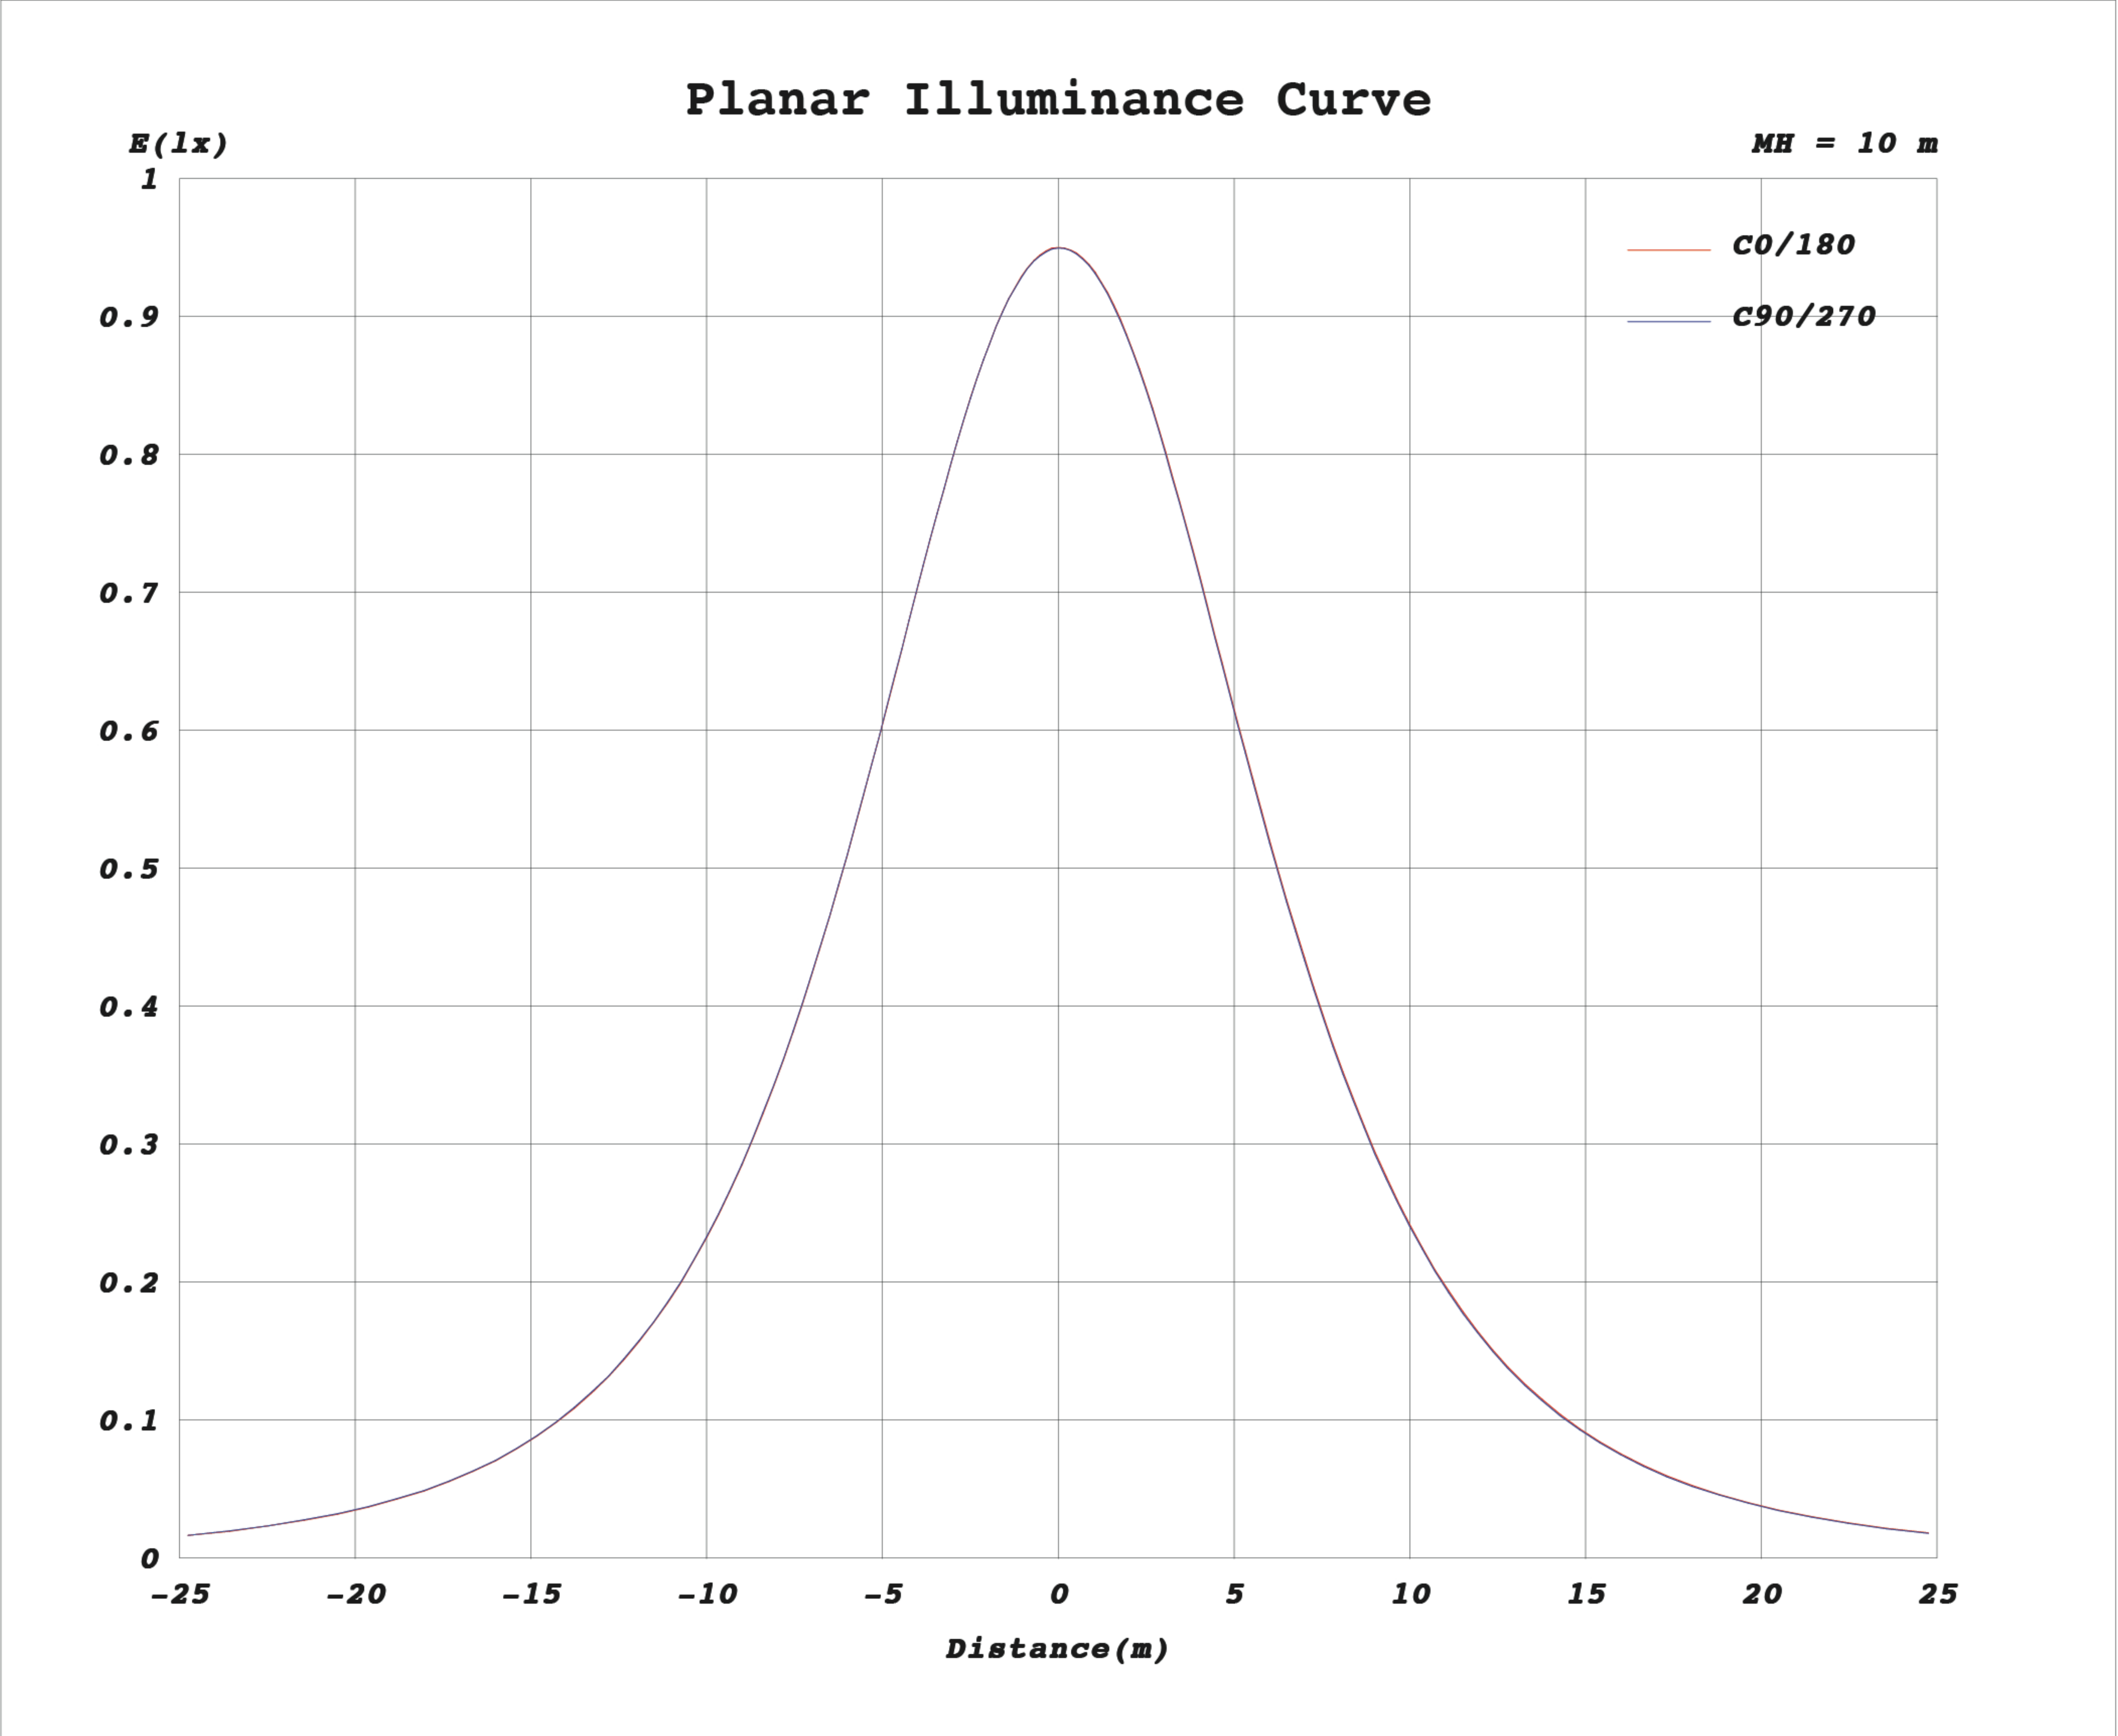

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Mr. Ma
Test Date: 18 April 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity: 65.0%
Test Distance: 6.100m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz		
Lamp Flux:313.833x1 lm		
NAME: Slice Circle IV+ WW 2W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:

Table--1													UNIT: cd						
C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0							
5	94.6	94.6	94.5	94.6	94.6	94.7	94.9	94.9	94.8	94.8	94.8	94.7							
10	93.5	93.4	93.3	93.5	93.5	93.7	94.1	94.1	94.0	93.9	93.8	93.8							
15	91.6	91.5	91.5	91.6	91.8	92.0	92.5	92.5	92.5	92.3	92.2	92.1							
20	89.0	88.9	88.8	89.1	89.3	89.5	90.2	90.3	90.3	90.0	89.9	89.7							
25	85.7	85.6	85.5	85.8	86.0	86.4	87.3	87.3	87.3	87.0	86.8	86.6							
30	81.7	81.6	81.4	81.8	82.1	82.5	83.5	83.6	83.6	83.2	83.0	82.7							
35	77.0	76.9	76.7	77.2	77.5	78.0	79.2	79.3	79.3	78.8	78.5	78.2							
40	71.7	71.6	71.3	71.9	72.2	72.8	74.1	74.2	74.3	73.7	73.4	73.0							
45	65.8	65.7	65.5	66.0	66.5	67.0	68.5	68.5	68.6	68.0	67.7	67.2							
50	59.3	59.2	58.9	59.6	60.0	60.6	62.2	62.2	62.3	61.8	61.4	60.8							
55	52.3	52.1	51.9	52.5	53.0	53.7	55.4	55.4	55.6	54.9	54.5	53.9							
60	44.8	44.6	44.3	45.1	45.6	46.2	48.1	48.1	48.3	47.6	47.2	46.5							
65	36.9	36.7	36.6	37.2	37.8	38.5	40.3	40.4	40.5	39.7	39.3	38.6							
70	28.8	28.7	28.4	29.2	29.7	30.4	32.4	32.5	32.6	31.9	31.4	30.8							
75	20.9	20.8	20.6	21.3	21.8	22.4	24.2	24.5	24.5	23.9	23.3	22.7							
80	13.6	13.5	13.3	14.0	14.3	14.9	16.6	16.8	16.9	16.3	15.8	15.2							
85	7.24	7.16	7.07	7.55	7.88	8.35	9.70	9.94	10.1	9.58	9.11	8.64							
90	3.81	3.81	3.86	3.89	3.96	4.03	4.50	4.60	4.64	4.37	4.15	3.99							
95	3.78	3.79	3.83	3.87	3.91	3.91	3.92	3.92	3.89	3.85	3.80	3.80							
100	3.73	3.74	3.78	3.82	3.86	3.86	3.87	3.88	3.85	3.81	3.76	3.75							
105	3.65	3.66	3.70	3.73	3.77	3.78	3.79	3.80	3.78	3.74	3.69	3.68							
110	3.53	3.54	3.58	3.62	3.66	3.66	3.69	3.70	3.67	3.62	3.56	3.54							
115	3.39	3.40	3.43	3.47	3.51	3.52	3.55	3.56	3.54	3.48	3.42	3.39							
120	3.21	3.22	3.26	3.29	3.33	3.34	3.38	3.39	3.36	3.31	3.24	3.20							
125	3.01	3.02	3.05	3.09	3.12	3.14	3.17	3.19	3.16	3.11	3.05	3.00							
130	2.78	2.79	2.81	2.85	2.89	2.90	2.95	2.96	2.94	2.88	2.82	2.78							
135	2.54	2.54	2.57	2.61	2.64	2.65	2.70	2.71	2.69	2.64	2.58	2.54							
140	2.27	2.28	2.30	2.33	2.37	2.38	2.43	2.45	2.43	2.37	2.32	2.29							
145	1.99	1.99	2.01	2.04	2.08	2.09	2.14	2.16	2.15	2.09	2.05	2.02							
150	1.71	1.71	1.72	1.75	1.79	1.79	1.85	1.87	1.85	1.80	1.76	1.74							
155	1.43	1.43	1.44	1.46	1.49	1.50	1.55	1.57	1.56	1.52	1.48	1.47							
160	1.16	1.15	1.16	1.18	1.21	1.21	1.26	1.28	1.27	1.24	1.21	1.20							
165	0.91	0.90	0.90	0.92	0.94	0.94	0.99	1.01	1.00	0.97	0.95	0.96							
170	0.70	0.69	0.69	0.69	0.71	0.70	0.75	0.76	0.76	0.74	0.73	0.74							
175	0.55	0.54	0.54	0.53	0.55	0.53	0.56	0.57	0.56	0.56	0.56	0.57							
180	0.54	0.54	0.55	0.56	0.57	0.56	0.54	0.54	0.55	0.56	0.57	0.57							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Mr.Ma
Test Date:18 April 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.100m [K=1.0000]
Remarks: