



### DESCRIPTION OF MICROWAVE SENSOR

Detection zone Max (D x H): 5m x 5m  
 Detecting distance: 25% - 100%, adjustable  
 Light sensibility: 10-100 lux, adjustable  
 Hold time: 5sec-5min, adjustable  
 Stand-by Period: 0sec - , adjustable  
 Mounting height: 5m Max.  
 Detection angle: 150° (Ceiling and wall installation)



Ceiling mounted detection area (Unit: m)  
 Suggested installation height: 3m



Wall mounted detection area (Unit: m)  
 Suggested installation height: 2m



### QUICKINFO

#### GENERAL

Finish	Black/Silver/White
Material	Die-cast Aluminium/Polycarbonate
IP	54
Lifespan	L80/50,000h
Warranty	5 years

#### LED


Optic	Opal Diffuser
Lumen	3200lm / 2400lm
Efficacy	100lm/W
CRI	3000K / 4000K
CCT	>90
SDCM	<3
UGR	<23

#### ELECTRICAL

Voltage	220-240V
Power	32/24W
Driver (Build-in)	Phase cut

#### SENSOR

The configuration of the detecting function is by setting the DIP switch. Default sensor factory settings: Detecting distance: 100%, Hold time: 1 min, Stand-by Period: 60 min (30%). For more details go to download the sensor specification sheet from the products page.

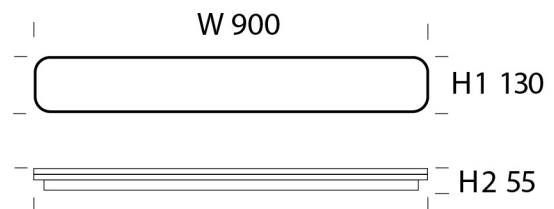


#### PURATI PTY LTD


Unit 10, 80 O'Riordan St, Alexandria NSW 2015  
 Tel: +61 2 8065 8181  
 sales@purati.com

### DESCRIPTION OF MICROWAVE SENSOR

Detection zone Max (D x H): 5m x 5m  
 Detecting distance: 25% - 100%, adjustable  
 Light sensibility: 10-100 lux, adjustable  
 Hold time: 5sec-5min, adjustable  
 Stand-by Period: 0sec - , adjustable  
 Mounting height: 5m Max.  
 Detection angle: 150° (Ceiling and wall installation)



Ceiling mounted detection area (Unit: m)  
 Suggested installation height: 3m



Wall mounted detection area (Unit: m)  
 Suggested installation height: 2m



### QUICKINFO

#### GENERAL

Finish	Black/Silver/White
Material	Die-cast Aluminium/Polycarbonate
IP	54
Lifespan	L80/50,000h
Warranty	5 years

#### LED


Optic	Opal Diffuser
Lumen	3800lm / 2900lm
Efficacy	100lm/W
CRI	3000K / 4000K
CCT	>90
SDCM	<3
UGR	<23

#### ELECTRICAL

Voltage	220-240V
Power	38/29W
Driver (Build-in)	Phase cut

#### SENSOR

The configuration of the detecting function is by setting the DIP switch. Default sensor factory settings: Detecting distance: 100%, Hold time: 1 min, Stand-by Period: 60 min (30%). For more details go to download the sensor specification sheet from the products page.

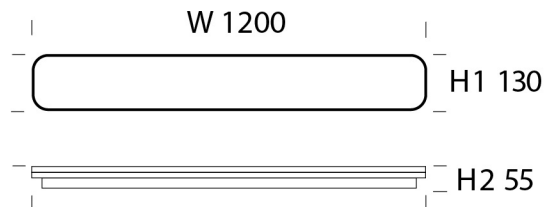


#### PURATI PTY LTD


Unit 10, 80 O'Riordan St, Alexandria NSW 2015  
 Tel: +61 2 8065 8181  
 sales@purati.com

### DESCRIPTION OF MICROWAVE SENSOR

Detection zone Max (D x H): 5m x 5m  
 Detecting distance: 25% - 100%, adjustable  
 Light sensibility: 10-100 lux, adjustable  
 Hold time: 5sec-5min, adjustable  
 Stand-by Period: 0sec - , adjustable  
 Mounting height: 5m Max.  
 Detection angle: 150° (Ceiling and wall installation)



Ceiling mounted detection area (Unit: m)  
 Suggested installation height: 3m



Wall mounted detection area (Unit: m)  
 Suggested installation height: 2m



### QUICKINFO

#### GENERAL

Finish	Black/Silver/White
Material	Die-cast Aluminium/Polycarbonate
IP	54
Lifespan	L80/50,000h
Warranty	5 years

#### LED


Optic	Opal Diffuser
Lumen	5800lm / 4500lm
Efficacy	Up to 110lm/W
CRI	3000K / 4000K
CCT	>90
SDCM	<3
UGR	<25

#### ELECTRICAL

Voltage	220-240V
Power	50/40W
Driver (Build-in)	Phase cut

#### SENSOR

The configuration of the detecting function is by setting the DIP switch. Default sensor factory settings: Detecting distance: 100%, Hold time: 1 min, Stand-by Period: 60 min (30%). For more details go to download the sensor specification sheet from the products page.

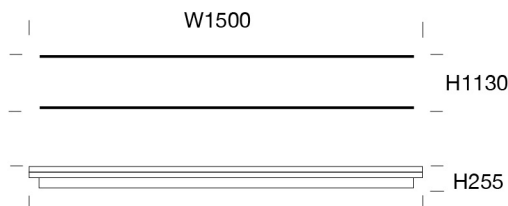

#### PURATI PTY LTD

Unit 10, 80 O'Riordan St, Alexandria NSW 2015  
 Tel: +61 2 8065 8181  
 sales@purati.com