

Compo 900 Office

Product Coded

C900W-W907055D-O C900W-B907055D-O

DESCRIPTION

Compo 900 Office

Pure architectural light fittings for all applications

Compo series is a very classic cylindrical design in various sizes and mounting options that integrates elegantly into any architecture.

Uniformly illuminated product thanks to its 2 diffusers design. Opal diffuser provides homogeneous general lighting and Micro-prismatic diffuser is ideal for office lighting.

Available in direct only or direct – indirect light distribution options which perfect for office use, education, healthcare, retail, hospitality, and hotel.

npk design, the Netherlands




QUICKINFO

GENERAL

Material Finish IP Lifetime Warranty	Aluminium, Micro-prismatic cover White/Black IP20 L80/50,000h 5 years
LED	
LED Chip	Seoul
Lumen	9000lm/7000lm/5500lm
Efficary	Up tp 105lm/W
CRI	>90
CCT	3000K/4000K Switch
SDCM	>3
UGR	<19 (X=4H, Y=8H)
ELECTRICAL	
Voltage	220-240V
Power	90/70/55W Switch
Driver(Build-in)	Phase Dimming
Light distribution	Direct only

5 YEARS

IK08

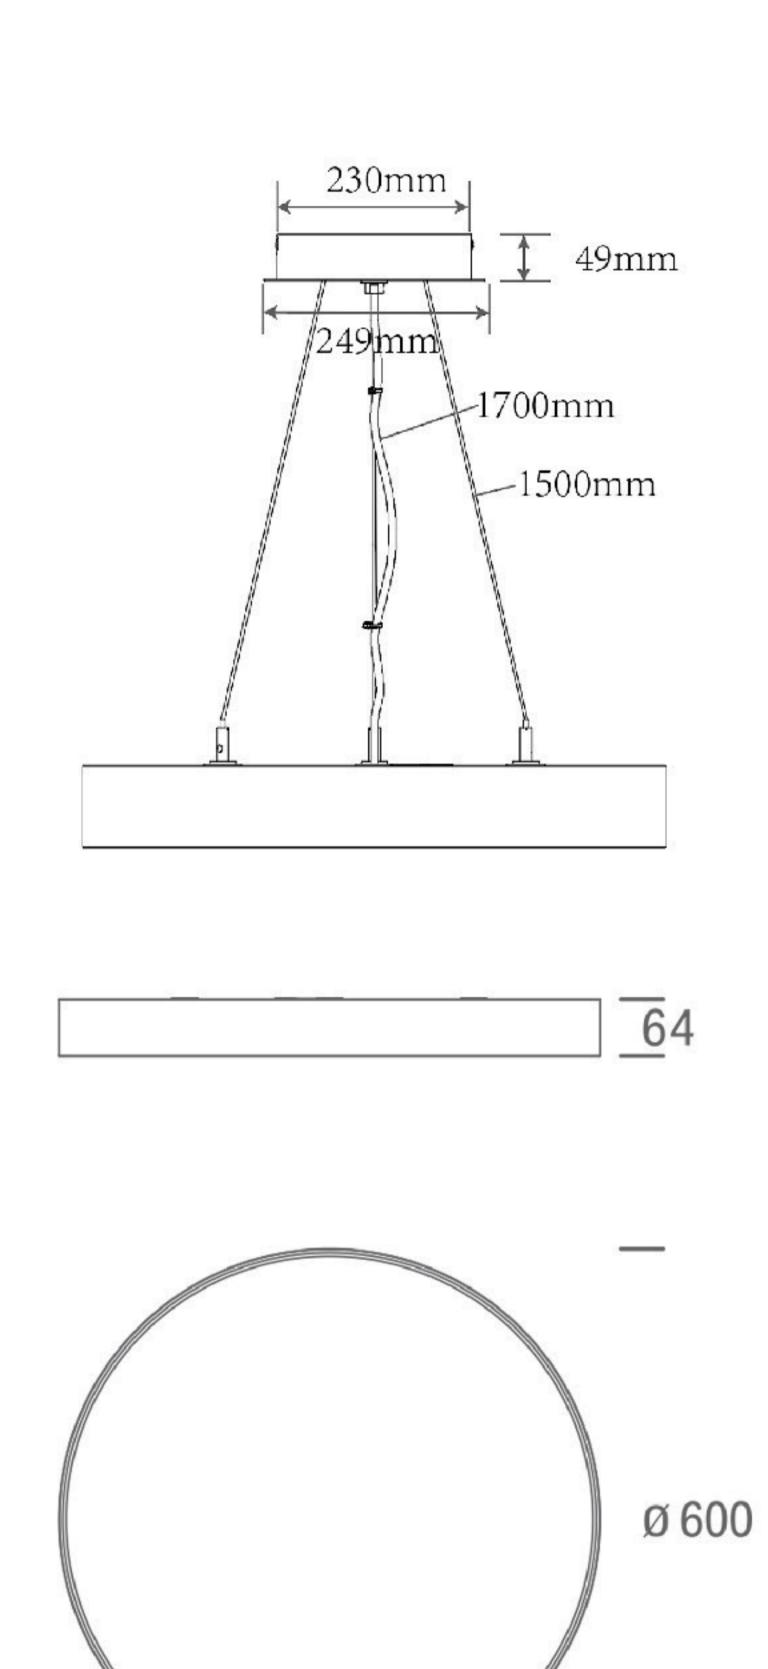



Color

Power

Switch

Unit 10, 80 O'Riordan St, Alexandria NSW 2015 Tel: +61 2 8065 8181 sales@purati.com

CRI>90 SDCM<3



Compo 900 Office DALI

Product Coded

C900W-W907055D-OD C900W-B907055D-OD

DESCRIPTION

Compo 900 Office DALI

Pure architectural light fittings for all applications

Compo series is a very classic cylindrical design in various sizes and mounting options that integrates elegantly into any architecture.

Uniformly illuminated product thanks to its 2 diffusers design. Opal diffuser provides homogeneous general lighting and Micro-prismatic diffuser is ideal for office lighting.

Available in direct only or direct – indirect light distribution options which perfect for office use, education, healthcare, retail, hospitality, and hotel.

npk design, the Netherlands



QUICKINFO


GENERAL


Material Finish IP Lifetime Warranty	Aluminium, Micro-prismatic cover White/Black IP20 L80/50,000h 5 years
LED	
LED Chip	Seoul
Lumen	9000lm/7000lm/5500lm
Efficary	Up tp 105lm/W
CRI	>90
CCT	3000K/4000K Switch
SDCM	>3
UGR	<19 (X=4H, Y=8H)



Voltage 220-240V
Power 90/70/55W Switch
Driver(Build-in) DALI Dimming
Light distribution Direct only



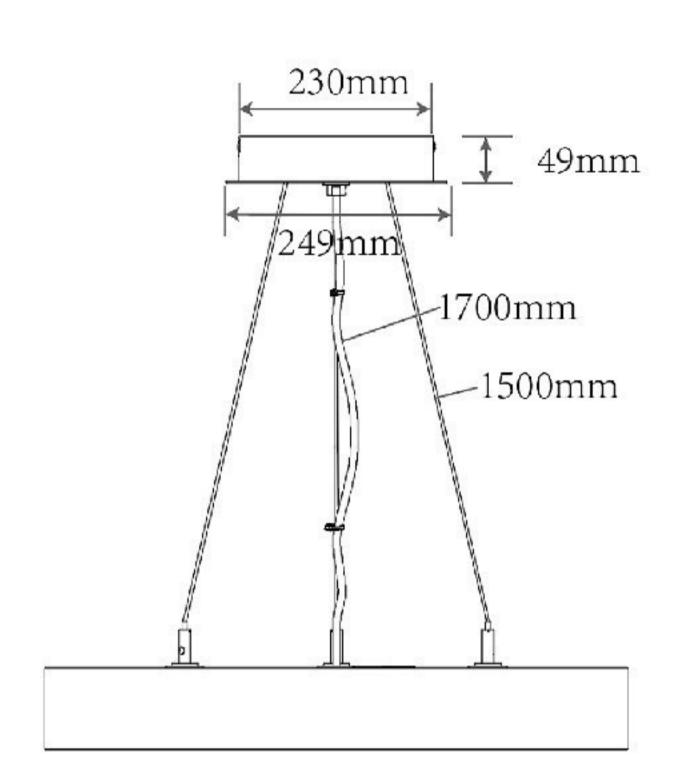

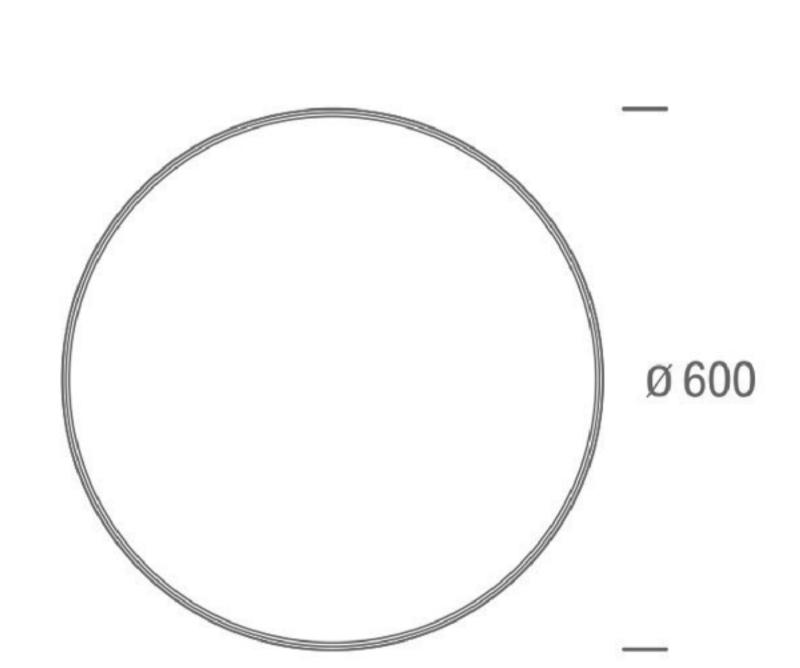

64



Compo 900 Office Indirect

Product Coded

C900W-W907055D-OI C900W-B907055D-OI

DESCRIPTION

Compo 900 Office Indirect

Pure architectural light fittings for all applications

Compo series is a very classic cylindrical design in various sizes and mounting options that integrates elegantly into any architecture.

Uniformly illuminated product thanks to its 2 diffusers design. Opal diffuser provides homogeneous general lighting and Micro-prismatic diffuser is ideal for office lighting.

Available in direct only or direct – indirect light distribution options which perfect for office use, education, healthcare, retail, hospitality, and hotel.

npk design, the Netherlands



QUICKINFO

GENERAL

Material	Aluminium, Micro-prismatic cover
Finish	White/Black
IP	IP20
Lifetime	L80/50,000h
Warranty	5 years
LED	


LED


59-30-433633	
LED Chip	Seoul
Lumen	9000lm/7000lm/5500lm
Efficary	Up tp 105lm/W
CRI	>90
CCT	3000K/4000K Switch
SDCM	>3
UGR	<19 (X=4H, Y=8H)

ELECTRICAL

Voltage 220-240V
Power 90/70/55W Switch
Driver(Build-in) Phase Dimming
Light distribution Direct - Indirect



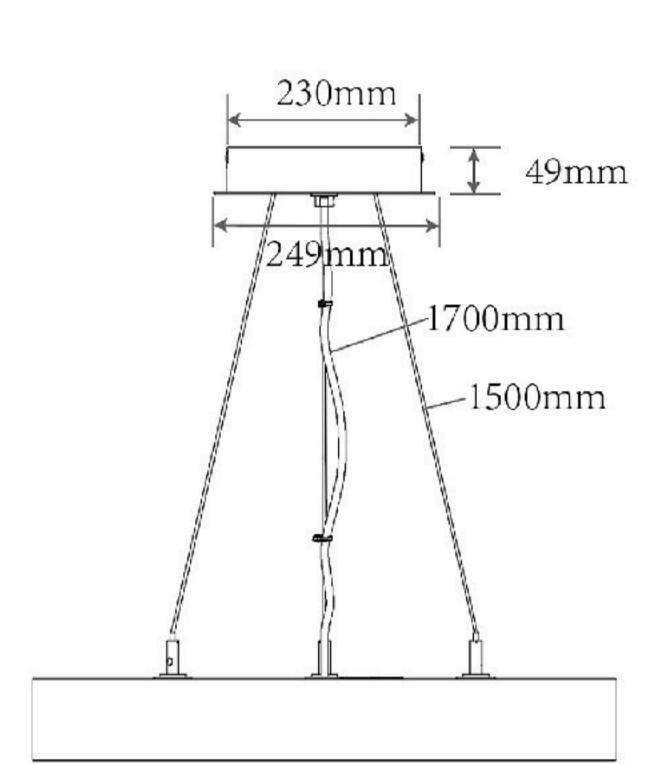

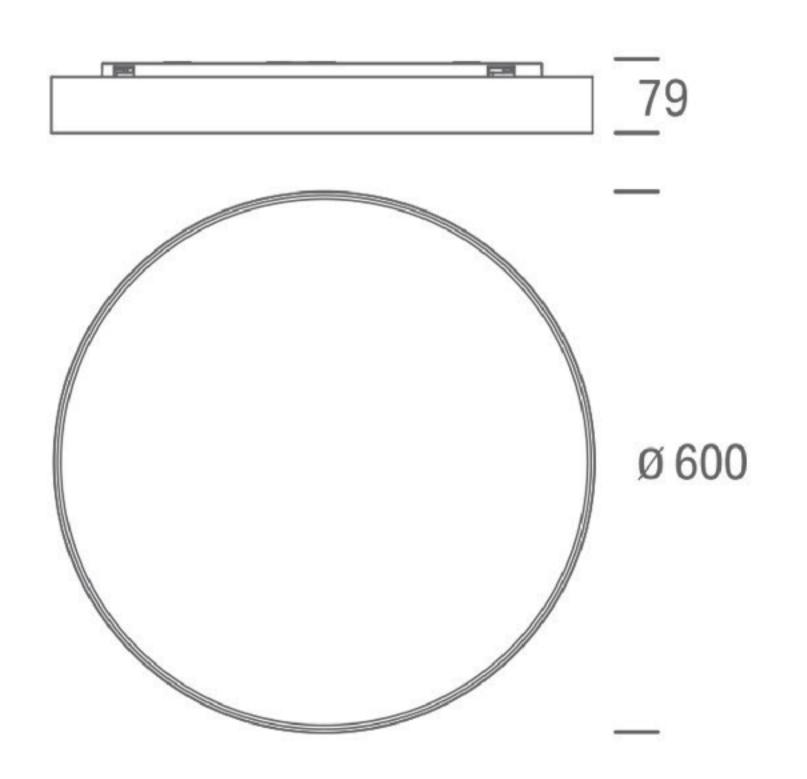

PURATI PTY LTD



Compo 900 Office Indirect DALI

Product Coded

C900W-W907055D-OID C900W-B907055D-OID

DESCRIPTION

Compo 900 Office Indirect DALI

Pure architectural light fittings for all applications

Compo series is a very classic cylindrical design in various sizes and mounting options that integrates elegantly into

any architecture.

Uniformly illuminated product thanks to its 2 diffusers design. Opal diffuser provides homogeneous general lighting and Micro-prismatic diffuser is ideal for office lighting.

Available in direct only or direct – indirect light distribution options which perfect for office use, education, healthcare, retail, hospitality, and hotel.

npk design, the Netherlands



QUICKINFO

GENERAL

Material	Aluminium, Micro-prismatic cover
Finish	White/Black
IP	IP20
Lifetime	L80/50,000h
Warranty	5 years

LED

LED Chip	Seoul
Lumen	9000lm/7000lm/5500lm
Efficary	Up tp 105lm/W
CRI	>90
CCT	3000K/4000K Switch
SDCM	>3
UGR	<19 (X=4H, Y=8H)

ELECTRICAL

Voltage 220-240V
Power 90/70/55W Switch
Driver(Build-in) DALI Dimming
Light distribution Direct - Indirect



