

PURATI

THE CONTEMPORARY COLLECTIONS





Sydney, Australia

## **Pure Architectural Light Fittings**

" We bring light to architectural spaces aiming the right balance between the aesthetic appeal of a space and the performance of the light "

**Purati Lighting**



# BEST OF BOTH WORLD





## PURATI


**Performance, Uniqueness, Responsibility, Aesthetics, Technology, Innovation.**

Those are our core value and our foundation. Our lights save space, save resources, and offer greater quality. We offer architectural lighting of premium quality and performance and with unique design.

We strive for quality, continuous improvement and excellence, with our passion for research & development, and attention to detail, aiming to create architectural beauty in a specific environment.

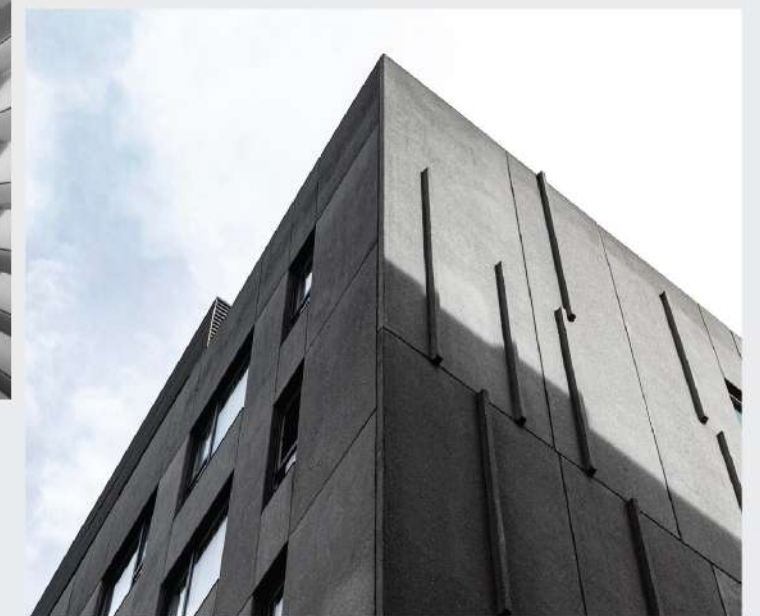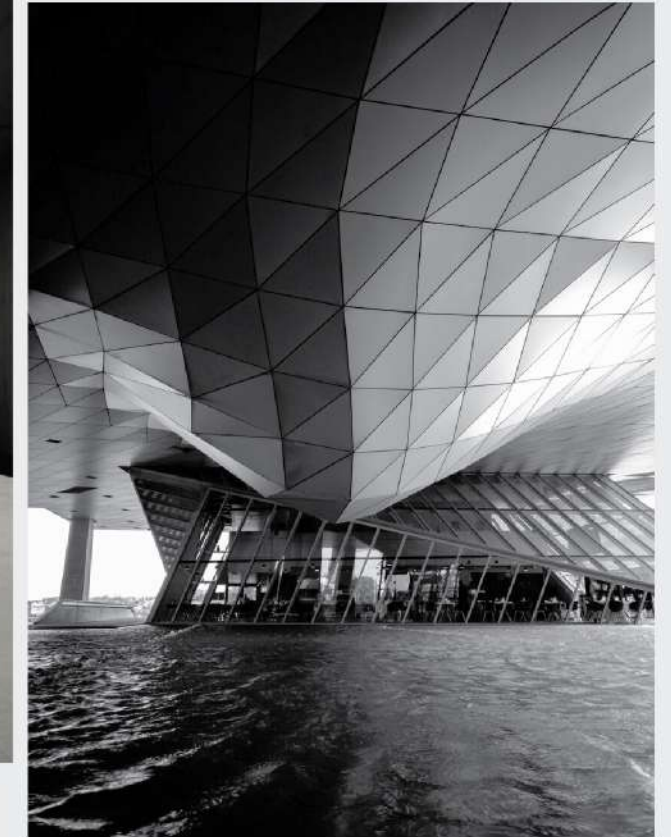



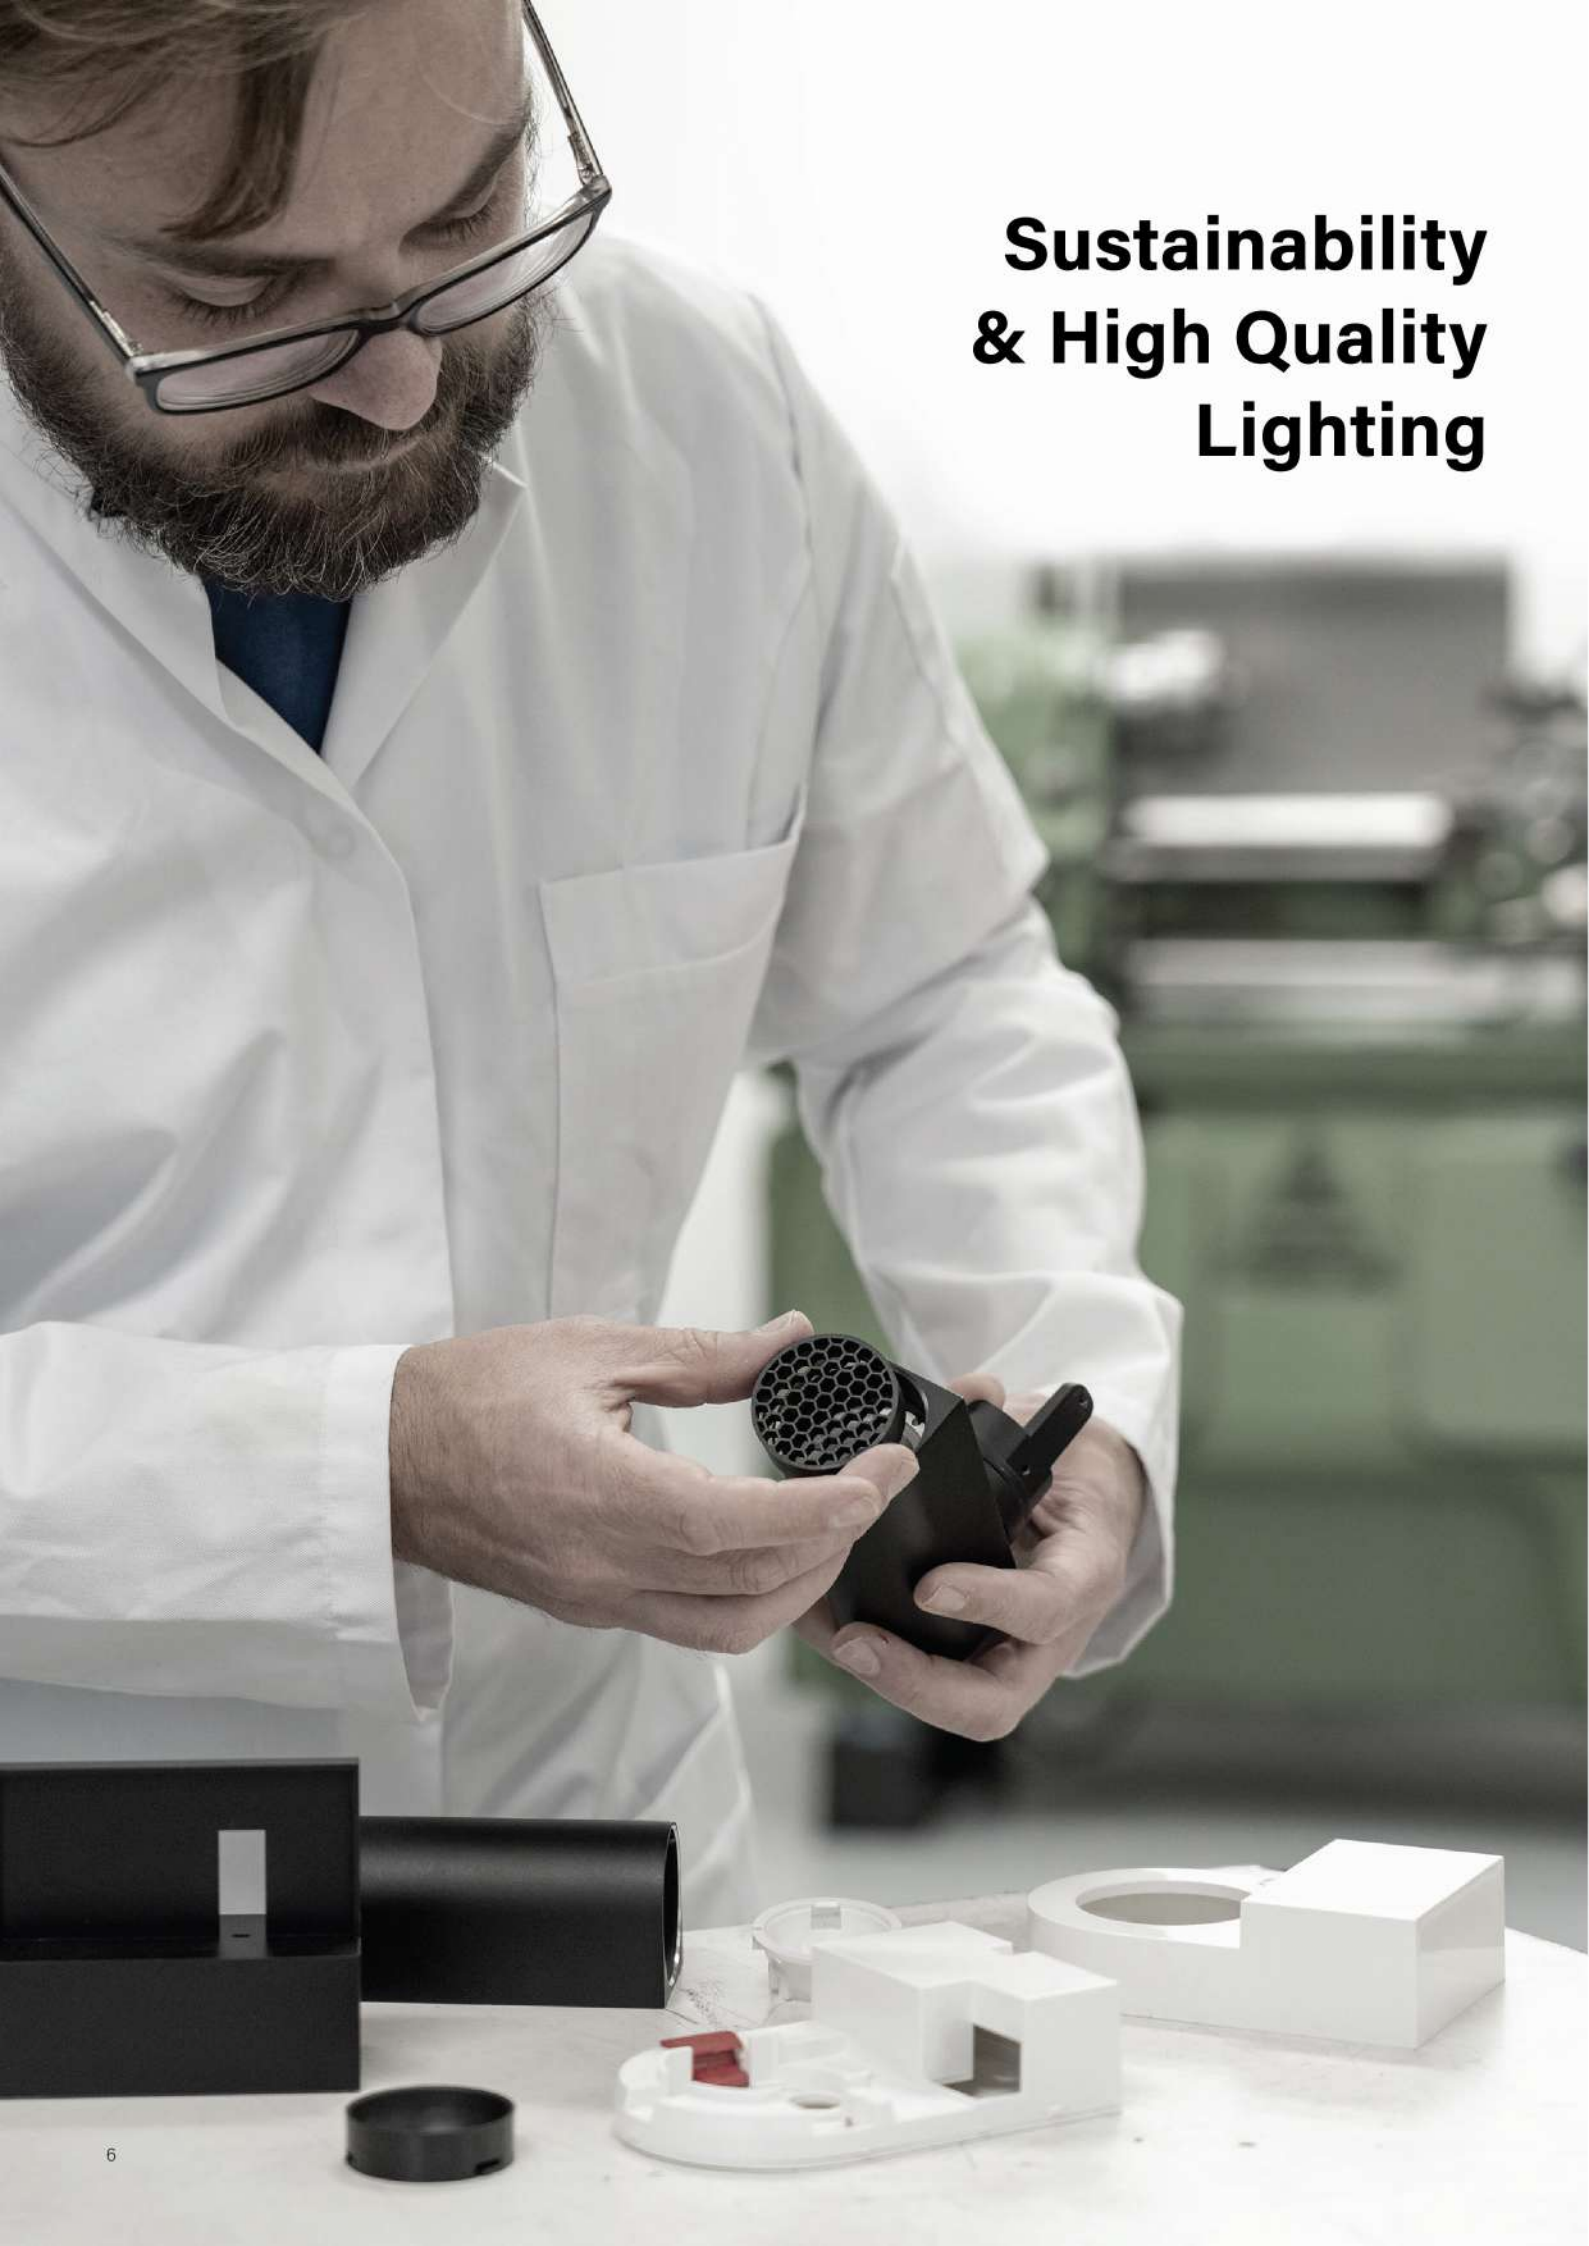

# Sustainability & High Quality Lighting



## Meet Our Design Partner

**Our designs are made by npk design, the Netherlands.**

npk design team is one of the most valued international design agencies in the Netherlands with more than 35 years of experience. The team consists of designers, engineers, strategists, and researchers all with a passion for solving complex problems.



# Design, mechanical structure, prototypes

npk design developed the design and mechanical of structure of our light fittings and built an extensive range of prototypes to test the functionality and looks of the Purati new light fittings.

- Concepting
- Design engineering
- Prototyping
- Quality Assurance
- Testing

Concepting



Design engineering



Prototyping



Quality Assurance

Testing








## Color Options

Power Coated Finish

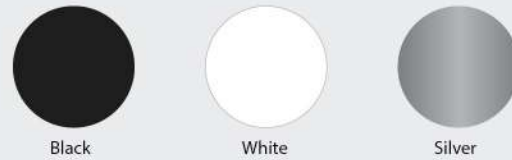


Brushed Aluminium



## Kelvin

The right colour temperature

Available in a variety of colour temperature in our lights, meaning you can create a warmer or a cooler atmosphere depending on your projects. 2700K, 3000K, 4000K and 6000K.



## Light Control

Casambi solution

**CASAMBI**

With Purati luminaires powered by Casambi, you can adjust the light through your smart phone, tablet or smartwatch. the Casambi App allows you to switch the light on and off, easily dim the light and adjust the colour temperature.



Tunable White Lighting

Tunable white of Purati Luminaire allows you to adjust the color of light from warm to neutral to cool (3000K-6500K) on appearance via DALI (DT8).



Dimmable Options

Most Purati Luminaires offer options for phase cut dimming and DALI 2.0 dimming versions.



Multiple Functions

With a smart all-in-one base design, you can choose from motion sensor, emergency lighting, motion and emergency lighting.

**PURATI LIGHTING** is committed to ensuring you with the high-quality standards in luminaire design and manufacturing.

At least 5 years peace of mind...



**YEARS  
WARRANTY**



Purati, Fusi Series



Design Award 2024



Slice Series



## Design Awards

Our award-winning products have been judged and praised for their exquisite design and technological ingenuity.

Design Award 2016





# HIGHLIGHTS



**COMPO**  
Surface Mounted  
Suspension  
Free-standing



**FLOAT**  
Surface Mounted  
Wall Mounted  
Suspended



**FUSI**  
Semi-recessed  
Surface Mounted  
Track Mounted  
Wall Mounted



**STRIPLINE**  
Suspension  
Free-standing



**PURA**  
Surface Mounted  
Recessed  
Suspension  
Track Mounted



**SLICE 2.0**  
Surface Mounted  
Recessed  
Suspension



**STATIC**  
Ceiling Recessed



**FUOCO ROUND**  
Ceiling Recessed  
Surface Mounted  
Suspension



**DISC**  
Surface Mounted  
Suspension  
Track Mounted



**VERSO**  
Surface Mounted  
Suspension



**MIX TRACK**



**SURFACE**  
Surface Mounted



**DEMO CASE**



## FUSI

The typical modular design that combines beauty, precision, and versatility

Thanks to their powerful LED, our swivelling spotlights deliver ideal for indoor lighting. Our spotlights are available in surface-mounted, semi-recessed or track-mounted versions, with wide to focused beam angles. They can be used for presentation, in retail situations, or in museums.

npk design, The Netherlands



reddot winner 2024



Finishes



	Fusi 46 Spot Uno	Fusi 46 Spot Duo	Fusi 46 Spot Uno	Fusi 46 Spot Duo
<b>CCT</b>	3000K	3000K	3000K	3000K
<b>CRI</b>	>95	>95	>95	>95
<b>SDCM</b>	<3	<3	<3	<3
<b>UGR</b>	<13	<13	<13	<13
<b>Power</b>	8/11W	15/20W	8/11W	15/20W
<b>Lumen</b>	570/720lm, 620lm/780lm, 620/770lm, 590/740lm	1100/1400lm, 1200/1500lm, 1200/1500lm, 1200/1550lm	570/720lm, 620lm/780lm, 620/770lm, 590/740lm	1100/1400lm, 1200/1500lm, 1200/1500lm, 1200/1550lm
<b>Driver</b>	Phase cut	Phase cut	Phase cut	Phase cut
<b>Efficacy</b>	75lm/W	75lm/W	75lm/W	75lm/W
<b>Beam angle</b>	15° / 24° / 36° / 50°	15° / 24° / 36° / 50°	15° / 24° / 36° / 50°	15° / 24° / 36° / 50°
<b>IP Rating</b>	IP20	IP20	IP20	IP20
<b>IK Rating</b>	IK08	IK08	IK08	IK08
<b>Lifetime</b>	L80, 54,000h	L80, 54,000h	L80, 54,000h	L80, 54,000h
<b>Warranty</b>	5 years	5 years	5 years	5 years

Beam Angles 15° / 24° / 36° / 50°



Finishes



	Fusi 46 Spot Uno	Fusi 46 Spot Duo	Fusi 46 Spot Wall Uno	Fusi 46 Spot Wall Duo
<b>CCT</b>	3000K	3000K	3000K	3000K
<b>CRI</b>	>95	>95	>95	>95
<b>SDCM</b>	<3	<3	<3	<3
<b>UGR</b>	<13	<13	<13	<13
<b>Power</b>	8/11W	15/20W	6W	12W
<b>Lumen</b>	570/720lm, 620lm/780lm, 620/770lm, 590/740lm	1100/1400lm, 1200/1500lm, 1200/1500lm, 1200/1550lm	460lm, 510lm, 500lm, 480lm	900lm, 960lm, 960lm, 920lm
<b>Driver</b>	Phase cut / DALI	Phase cut / DALI	Non-Dimmable	Non-Dimmable
<b>Efficacy</b>	75lm/W	75lm/W	75lm/W	75lm/W
<b>Beam angle</b>	15° / 24° / 36° / 50°	15° / 24° / 36° / 50°	15° / 24° / 36° / 50°	15° / 24° / 36° / 50°
<b>IP Rating</b>	IP20	IP20	IP20	IP20
<b>IK Rating</b>	IK08	IK08	IK08	IK08
<b>Lifetime</b>	L80, 54,000h	L80, 54,000h	L80, 54,000h	L80, 54,000h
<b>Warranty</b>	5 years	5 years	5 years	5 years

Beam Angles 15° / 24° / 36° / 50°






# FLOAT

Timeless elegance.  
360° perfect illumination.

The Float series by European design is an outstanding interior luminaire offering floating elegance, timeless aesthetic, and extremely homogenous omnidirectional illumination.



Finishes  
 Black  
 White

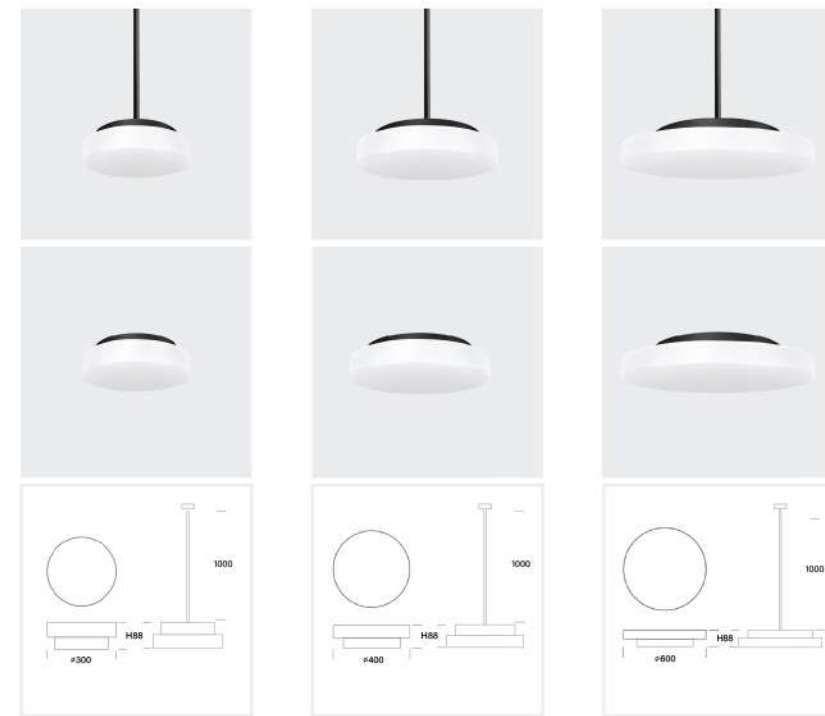

	Float 300mm	Float 400mm	Float 600mm
<b>CCT</b>	3000K/4000K Switch	3000K/4000K Switch	3000K/4000K Switch
<b>CRI</b>	>90	>90	>90
<b>SDCM</b>	<3	<3	<3
<b>UGR</b>	<23 (X=4H, Y=8H)	<23 (X=4H, Y=8H)	<23 (X=4H, Y=8H)
<b>Power</b>	24/18/10W Switch	30/22/17W Switch	55/38W Switch
<b>Lumen</b>	3100lm/2300lm/1300lm	4000lm/3000lm/2300lm	7200lm/5016lm
<b>Driver</b>	Non-Dimmable / Phase cut / DALI	Non-Dimmable / Phase cut / DALI	Non-Dimmable / Phase cut / DALI
<b>Functions</b>	CF Motion sensor	CF Motion sensor	CF Motion sensor
<b>Efficacy</b>	132lm/W	132lm/W	132lm/W
<b>Beam angle</b>	120°	120°	120°
<b>IP Rating</b>	IP20	IP20	IP20
<b>IK Rating</b>	IK08	IK08	IK08
<b>Lifetime</b>	L80 50,000h	L80 50,000h	L80 50,000h
<b>Warranty</b>	5 years	5 years	5 years
<b>Mounting</b>	Surface mounted, Wall mounted, Rod suspension (1m), Wire suspension (2m)		

Beam Angles 120°







# COMPO

Pure architectural light fittings  
for all applications

Designed and engineered by  
npk design,  
The Netherlands.




Compo series is a very classic cylindrical design in various sizes and mounting options that integrated elegantly into any architecture.

Uniformly illuminated product thanks to opal and micro-prismatic diffuser options. Opal diffuser provides homogeneous general lighting and Micro-prismatic diffuser (UGR<19) is ideal for office lighting.

Available in direct only or direct-indirect light distribution options which perfect for office use, education, healthcare, retail, hospitality, and hotel.



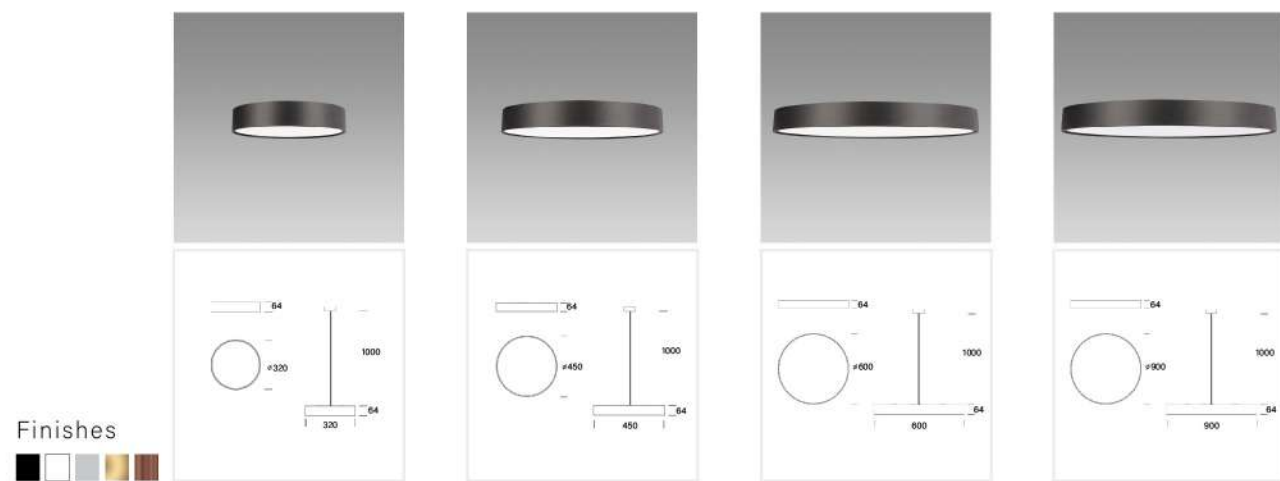

	Compo 320 / 320 office	Compo 450 / 450 office	Compo 600 / 600 office	Compo 900 / 900 office
<b>CCT</b>	3000K/4000K Switch	3000K/4000K Switch	3000K/4000K Switch	3000K/4000K Switch
<b>LED CHIP</b>	Seoul	Seoul	Seoul	Seoul
<b>CRI</b>	>90	>90	>90	>90
<b>SDCM</b>	<3	<3	<3	<3
<b>UGR</b>	<19 / <23 (X=4H, Y=8H)	<19 / <23 (X=4H, Y=8H)	<19 / <23 (X=4H, Y=8H)	<19 / <23 (X=4H, Y=8H)
<b>Power</b>	24/18/10W Switch	30W/22W Switch	55W/38W Switch	90/70/55W Switch
<b>Lumen</b>	2400lm/1800lm	3100lm/230000lm	5500lm/4000lm	9000lm/ 7000lm/5500lm
<b>Driver</b>	Non-Dimmable / Phase cut / DALI	Non-Dimmable / Phase cut / DALI	Non-Dimmable / Phase cut / DALI	Non-Dimmable / Phase cut / DALI
<b>Efficacy</b>	100lm/W	100lm/W	100lm/W	100lm/W
<b>Diffuser</b>	Opal / Micro-prismatic	Opal / Micro-prismatic	Opal / Micro-prismatic	Opal / Micro-prismatic
<b>Beam angle</b>	120°	120°	120°	120°
<b>IP Rating</b>	IP20	IP20	IP20	IP20
<b>IK Rating</b>	IK08	IK08	IK08	IK08
<b>Lifetime</b>	L80 50,000h	L80 50,000h	L80 50,000h	L80 50,000h
<b>Warranty</b>	5 years	5 years	5 years	5 years
<b>Light distribution</b>	Direct only or Direct/Indirect	Direct only or Direct/Indirect	Direct only or Direct/Indirect	Direct only or Direct/Indirect
<b>Mounting</b>	Surface mounted, Wall mounted, Rod suspension (1m), Wire suspension (2m)			

Beam Angles 120°




	Compo 320 Rod Suspension / Wire Suspension	Compo 450 Rod Suspension / Wire Suspension	Compo 600 Rod Suspension / Wire Suspension	Compo 900 Rod Suspension / Wire Suspension
<b>CCT</b>	3000K/4000K Switch	3000K/4000K Switch	3000K/4000K Switch	3000K/4000K Switch
<b>LED CHIP</b>	Seoul	Seoul	Seoul	Seoul
<b>CRI</b>	>90	>90	>90	>90
<b>SDCM</b>	<3	<3	<3	<3
<b>UGR</b>	<19 / <23 (X=4H, Y=8H)	<19 / <23 (X=4H, Y=8H)	<19 / <23 (X=4H, Y=8H)	<19 / <23 (X=4H, Y=8H)
<b>Power</b>	24/18/10W Switch	30W/22W Switch	55W/38W Switch	90/70/55W Switch
<b>Lumen</b>	2400lm/1800lm	3100lm/230000lm	5500lm/4000lm	9000lm/ 7000lm/5500lm
<b>Driver</b>	Non-Dimmable / Phase cut / DALI	Non-Dimmable / Phase cut / DALI	Non-Dimmable / Phase cut / DALI	Non-Dimmable / Phase cut / DALI
<b>Efficacy</b>	100lm/W	100lm/W	100lm/W	100lm/W
<b>Diffuser</b>	Opal / Micro-prismatic	Opal / Micro-prismatic	Opal / Micro-prismatic	Opal / Micro-prismatic
<b>Beam angle</b>	120°	120°	120°	120°
<b>IP Rating</b>	IP20	IP20	IP20	IP20
<b>IK Rating</b>	IK08	IK08	IK08	IK08
<b>Lifetime</b>	L80 50,000h	L80 50,000h	L80 50,000h	L80 50,000h
<b>Warranty</b>	5 years	5 years	5 years	5 years
<b>Light distribution</b>	Direct only or Direct/Indirect	Direct only or Direct/Indirect	Direct only or Direct/Indirect	Direct only or Direct/Indirect
<b>Mounting</b>	Surface mounted, Wall mounted, Rod suspension (1m), Wire suspension (2m)			

Beam Angles 120°





Finishes

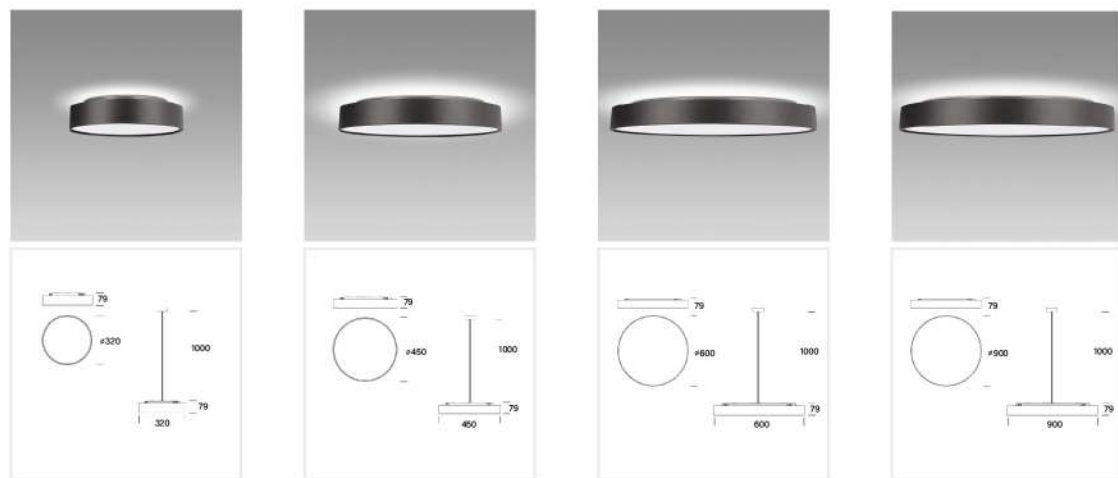

Finishes



	Compo 320 Indirect / 320 Indirect office	Compo 450 Indirect / 450 Indirect office	Compo 600 Indirect / 600 Indirect office	Compo 900 Indirect / 900 Indirect office
<b>CCT</b>	3000K/4000K Switch	3000K/4000K Switch	3000K/4000K Switch	3000K/4000K Switch
<b>LED CHIP</b>	Seoul	Seoul	Seoul	Seoul
<b>CRI</b>	>90	>90	>90	>90
<b>SDCM</b>	<3	<3	<3	<3
<b>UGR</b>	<19 / <23 (X=4H, Y=8H)	<19 / <23 (X=4H, Y=8H)	<19 / <23 (X=4H, Y=8H)	<19 / <23 (X=4H, Y=8H)
<b>Power</b>	24/18/10W Switch	30W/22W Switch	55W/38W Switch	90/70/55W Switch
<b>Lumen</b>	2400lm/1800lm	3100lm/230000lm	5500lm/4000lm	9000lm/ 7000lm/5500lm
<b>Driver</b>	Non-Dimmable / Phase cut / DALI	Non-Dimmable / Phase cut / DALI	Non-Dimmable / Phase cut / DALI	Non-Dimmable / Phase cut / DALI
<b>Efficacy</b>	100lm/W	100lm/W	100lm/W	100lm/W
<b>Diffuser</b>	Opal / Micro-prismatic	Opal / Micro-prismatic	Opal / Micro-prismatic	Opal / Micro-prismatic
<b>Beam angle</b>	120°	120°	120°	120°
<b>IP Rating</b>	IP20	IP20	IP20	IP20
<b>IK Rating</b>	IK08	IK08	IK08	IK08
<b>Lifetime</b>	L80 50,000h	L80 50,000h	L80 50,000h	L80 50,000h
<b>Warranty</b>	5 years	5 years	5 years	5 years
<b>Light distribution</b>	Direct - Indirect	Direct - Indirect	Direct - Indirect	Direct - Indirect
<b>Mounting</b>	Surface mounted, Wall mounted, Rod suspension (1m), Wire suspension (2m)			

Beam Angles 120°




	Compo 320 Indirect Rod Suspension / Wire Suspension	Compo 450 Indirect Rod Suspension / Wire Suspension	Compo 600 Indirect Rod Suspension / Wire Suspension	Compo 900 Indirect Rod Suspension / Wire Suspension
<b>CCT</b>	3000K/4000K Switch	3000K/4000K Switch	3000K/4000K Switch	3000K/4000K Switch
<b>LED CHIP</b>	Seoul	Seoul	Seoul	Seoul
<b>CRI</b>	>90	>90	>90	>90
<b>SDCM</b>	<3	<3	<3	<3
<b>UGR</b>	<19 / <23 (X=4H, Y=8H)	<19 / <23 (X=4H, Y=8H)	<19 / <23 (X=4H, Y=8H)	<19 / <23 (X=4H, Y=8H)
<b>Power</b>	24/18/10W Switch	30W/22W Switch	55W/38W Switch	90/70/55W Switch
<b>Lumen</b>	2400lm/1800lm	3100lm/230000lm	5500lm/4000lm	9000lm/ 7000lm/5500lm
<b>Driver</b>	Non-Dimmable / Phase cut / DALI	Non-Dimmable / Phase cut / DALI	Non-Dimmable / Phase cut / DALI	Non-Dimmable / Phase cut / DALI
<b>Efficacy</b>	100lm/W	100lm/W	100lm/W	100lm/W
<b>Diffuser</b>	Opal / Micro-prismatic	Opal / Micro-prismatic	Opal / Micro-prismatic	Opal / Micro-prismatic
<b>Beam angle</b>	↑120° 120°↓ / ↑120° 90°↓	↑120° 120°↓ / ↑120° 90°↓	↑120° 120°↓ / ↑120° 90°↓	↑120° 120°↓ / ↑120° 90°↓
<b>IP Rating</b>	IP20	IP20	IP20	IP20
<b>IK Rating</b>	IK08	IK08	IK08	IK08
<b>Lifetime</b>	L80 50,000h	L80 50,000h	L80 50,000h	L80 50,000h
<b>Warranty</b>	5 years	5 years	5 years	5 years
<b>Light distribution</b>	Direct - Indirect	Direct - Indirect	Direct - Indirect	Direct - Indirect
<b>Mounting</b>	Surface mounted, Wall mounted, Rod suspension (1m), Wire suspension (2m)			

Beam Angles Opal ↑120° 120°↓ Micro-prismatic ↑120° 90°↓






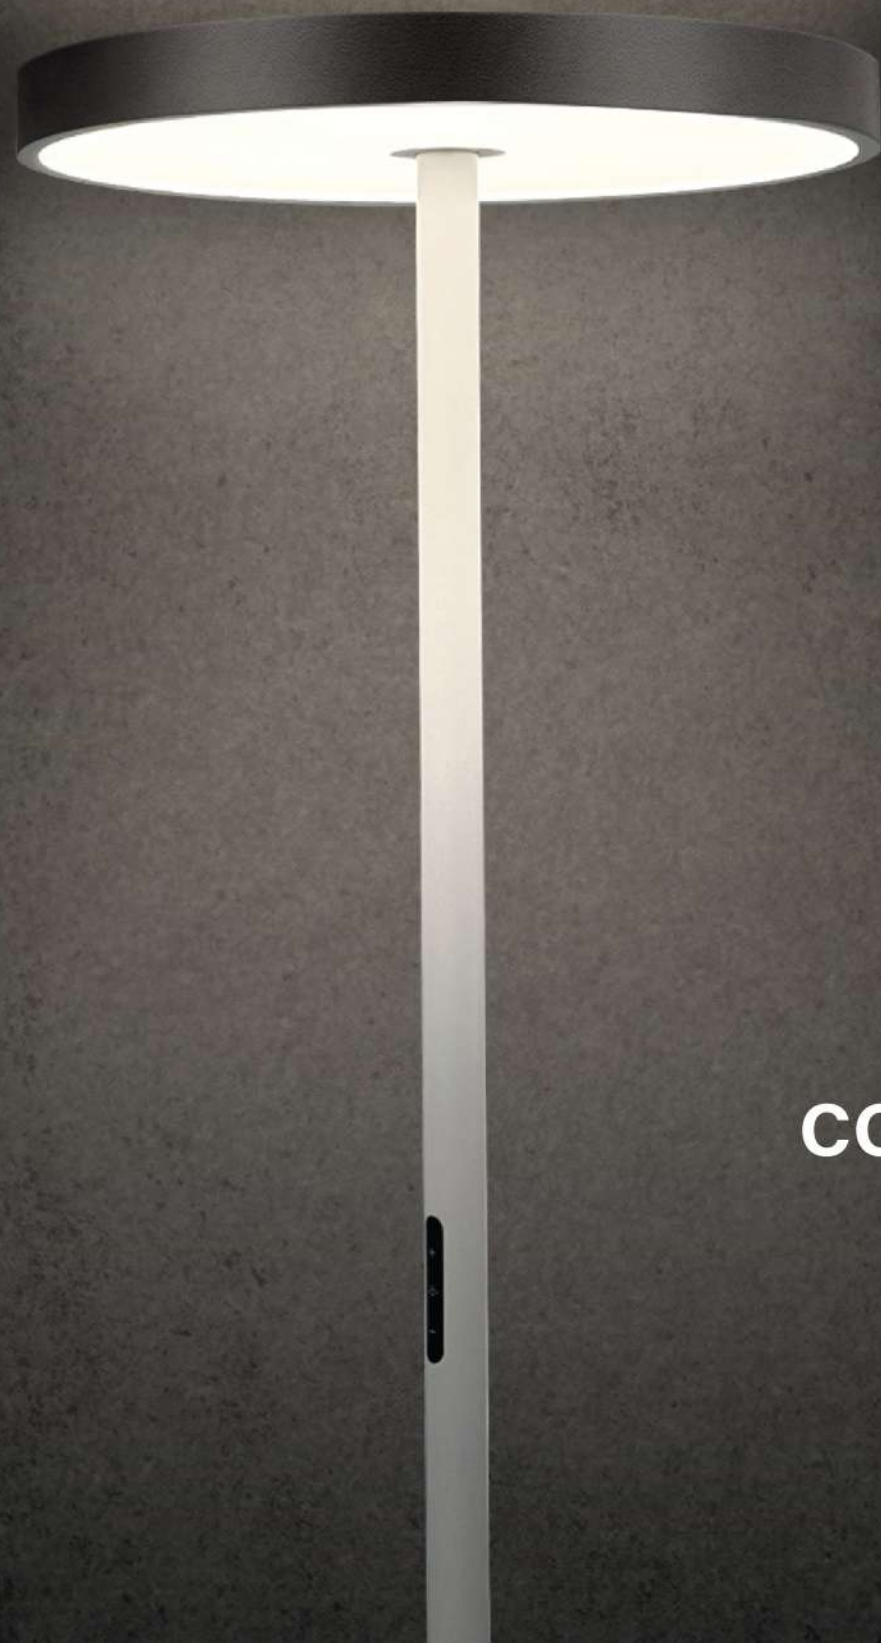

# COMPO FLOOR

Maximum Lighting Comfort  
The perfect balance between room  
and workplace lighting

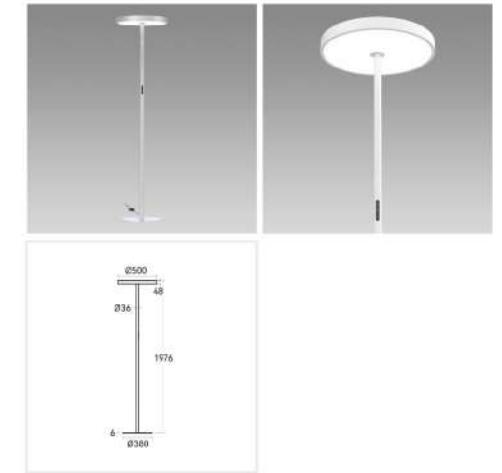

Finishes



Compo   Floor Luminaire	
CCT	3000-5700K adjustable
LED CHIP	Seoul
CRI	>90
SDCM	<16
UGR	<16 (X=4H, Y=8H)
Power	(↑ 40W/40W↓)
Lumen	8500lm (↑ 5000lm/3500lm↓)
Driver	Touch panel dimming
Efficacy	110lm/W
Diffuser	Micro-prismatic
Beam angle	↑ 115°/90°↓
IP Rating	IP20
IK Rating	IK08
Lifetime	L80 50,000h
Warranty	5 years
Light distribution	Direct-indirect

Beam Angles ↑ 115°/90°↓







# VERSO

The versatile light built for modern working space

The Verso series by European design is an independent office luminaire offering outstanding efficiency and maximum visual comfort. It's a direct and indirect lighting. Available in a variety of mounting options: for pendent, ceiling / wall surface mounted.

npk design, The Netherlands




Finishes

	Verso 1200 / 1200 Office	Verso Pendent 1200 / 1200 Pendent Office	Verso 1500 / 1500 Office	Verso Pendent 1500 / 1500 Pendent Office
CCT	3000k/ 4000k	3000k/ 4000k	3000k/ 4000k	3000k/ 4000k
CRI	>90	>90	>90	>90
SDCM	<3	<3	<3	<3
UGR	<19 / <23 (X=4H, Y=8H)	<19 / <23 (X=4H, Y=8H)	<19 / <23 (X=4H, Y=8H)	<19 / <23 (X=4H, Y=8H)
Power	20W/30W/ 38W	20W/30W/ 38W	30W/40W/50W	30W/40W/50W
Lumen	2000lm / 2900lm / 3850lm	2000lm / 2900lm / 3850lm	2850lm/3750lm/4650lm	2850lm/3750lm/4650lm
Driver	Non-Dimmable / Phase Cut / DALI	Non-Dimmable / Phase Cut / DALI	Non-Dimmable / Phase Cut / DALI	Non-Dimmable / Phase Cut / DALI
IP Rating	IP20	IP20	IP20	IP20
Lifetime	L80 50,000h	L80 50,000h	L80 50,000h	L80 50,000h
Warranty	5 years	5 years	5 years	5 years
Mounting	Surface mounted, Wall mounted, Wire suspended (2m)			

Beam Angles Opal 120°

Microprism 90°

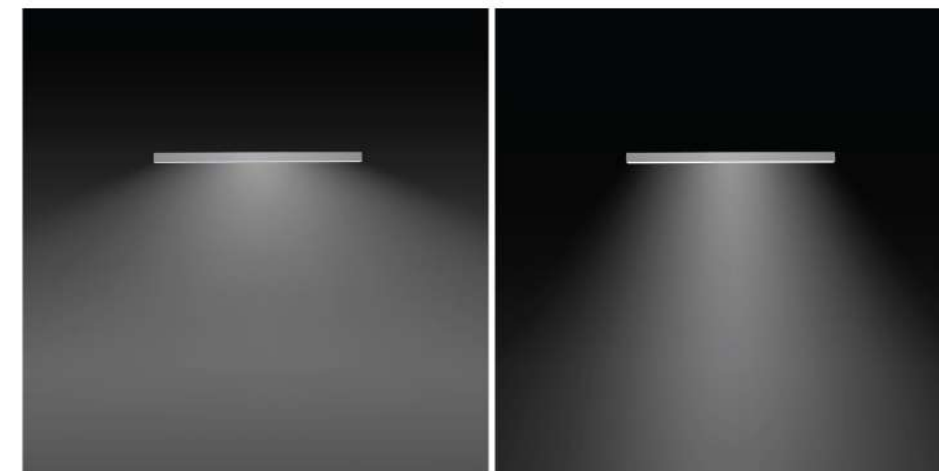



# DISC

Modern, minimal look thanks to thin LED Strip



Ultra-thin design, special internal reflector and opal diffuser makes direct and indirect light with uniform visuals for any interior projects. Available in 3 options for mounting: for suspended installation, ceiling and wall surface mounted or insert for 3-phase track system.

Finishes



	Disc 220 / 220 Suspension	Disc 300 / 300 Suspension	Disc 220 Track light	Disc 300 Track light
CCT	3000K/4000K Switch	3000K/4000K Switch	3000K/4000K Switch	3000K/4000K Switch
CRI	>90	>90	>90	>90
SDCM	<3	<3	<3	<3
UGR	<23	<23	<23	<23
Power	15/10/8W	24/18/10W	15/10/8W	24/18/10W
Lumen	1500lm/1000lm/800lm	2400lm/1800lm	1500lm/1000lm/800lm	2400lm/1800lm
Driver	Non-Dimmable / Phase cut / DALI 2.0	Non-Dimmable / Phase cut / DALI 2.0	Non-Dimmable / Phase cut / DALI 2.0	Non-Dimmable / Phase cut / DALI 2.0
Efficacy	100lm/W	100lm/W	100lm/W	100lm/W
Beam angle	110°	110°	110°	110°
IP Rating	IP20	IP20	IP20	IP20
IK Rating	IK08	IK08	IK08	IK08
Lifetime	L80 50,000h	L80 50,000h	L80 50,000h	L80 50,000h
Warranty	5 years	5 years	5 years	5 years
Light distribution	Direct / Indirect	Direct / Indirect	Direct / Indirect	Direct / Indirect
Functions	CF Motion sensor	CF Motion sensor / 2W Emergency 90mins (Lithium cell)	CF Motion sensor	CF Motion sensor / 2W Emergency 90mins (Lithium cell)
Mounting	Surface mounted, Wall mounted, Track mounted, Wire suspended (2m)			

Beam Angles 110°








# SLICE 2.0

The Slice series features high quality design, functionality, and ease of installation.

This year we've updated colour performance, improved IP rating, and equipped with push lock system for quick installation in the Slice series. Because of the new values, they can be perfectly used in both consumer and professional applications.




Finishes

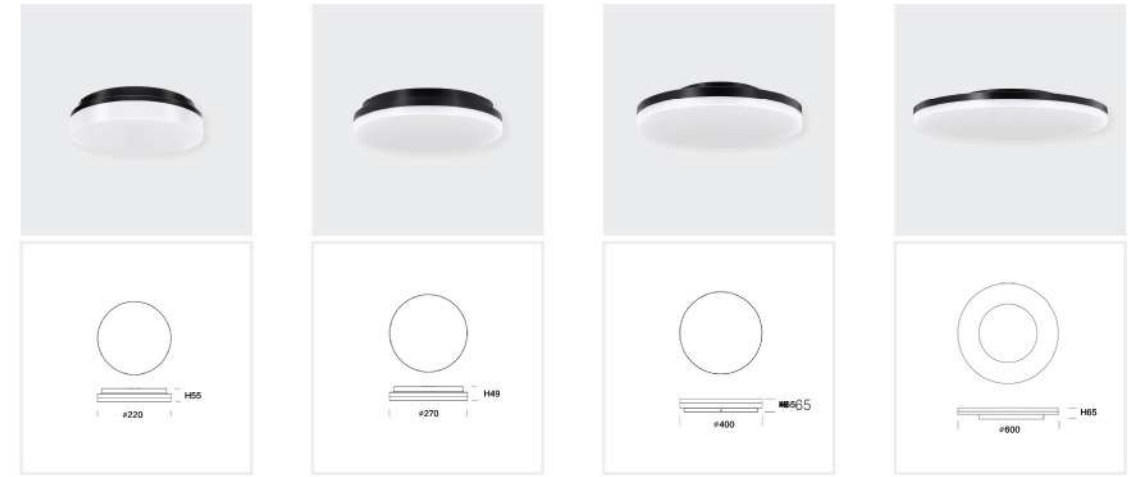


	Slice Circle 220	Slice Circle 270	Slice Circle 400	Slice Circle 600
CCT	3000K/4000K	3000K/4000K	3000K/4000K	3000K/4000K
CRI	>90	>90	>90	>90
SDCM	<3	<3	<3	<3
UGR	<23	<23	<23	<23
Power	15/10W	24/18/10W	32/24W	55/38W
Lumen	1500lm/1000lm	2400lm/1800lm/1000lm	3200ml/2400ml	3200ml/2400ml
Driver	Non-Dimmable / Phase cut / DALI	Non-Dimmable / Phase cut / DALI	Non-Dimmable / Phase cut / DALI	Non-Dimmable / Phase cut / DALI
Functions	CF Motion sensor / 2W Emergency 90mins (Lithium cell) /	CF Motion sesor/ PIR sensor/ 2W Emergency 90mins (Lithium cell)	CF Motion sensor / 2W Emergency 90mins (Lithium cell) /	CF Motion sensor / 2W Emergency 90mins (Lithium cell) /
Efficacy	100lm/W	100lm/W	100lm/W	100lm/W
Beam angle	120°	120°	120°	120°
IP Rating	IP54	IP54	IP54	IP54
IK Rating	IK10	IK10	IK10	IK10
Lifetime	L80 50,000h	L80 50,000h	L80 50,000h	L80 50,000h
Warranty	5 years	5 years	5 years	5 years

Beam Angles 120°



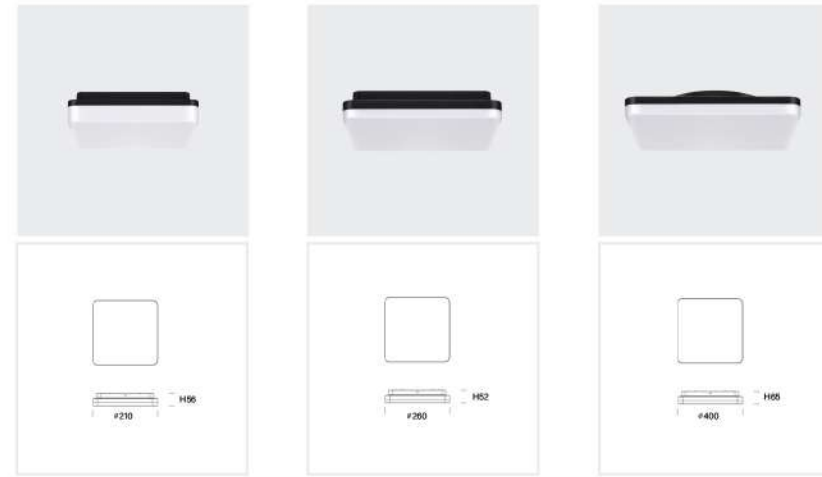

Finishes

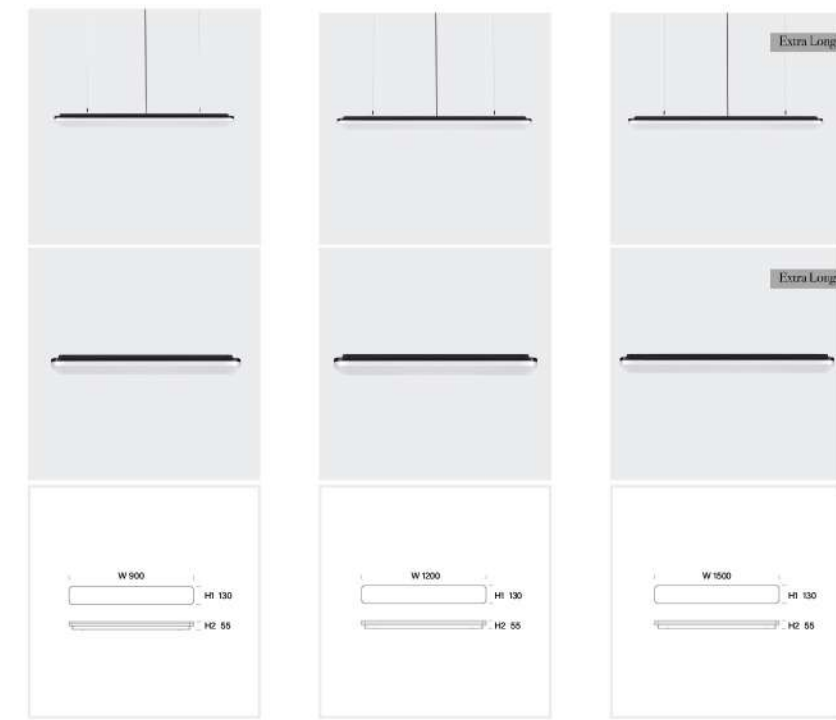

Finishes


	Slice Circle 220	Slice Circle 270	Slice Circle 400
<b>CCT</b>	3000K/4000K	3000K/4000K	3000K/4000K
<b>CRI</b>	>90	>90	>90
<b>SDCM</b>	<3	<3	<3
<b>UGR</b>	<23	<23	<23
<b>Power</b>	15/10W	24/18/10W	32/24W
<b>Lumen</b>	1500lm/1000lm	2400lm/1800lm/1000lm	3200lm/ 2400lm
<b>Driver</b>	Non-Dimmable/ Phase cut / DALI	Non-Dimmable/ Phase cut / DALI	Non-Dimmable/ Phase cut / DALI
<b>Functions</b>	CF Motion sensor / 2W Emergency 90mins (Lithium cell) /	CF Motion sensor / 2W Emergency 90mins (Lithium cell) /	CF Motion sensor / 2W Emergency 90mins (Lithium cell) /
<b>Efficacy</b>	100lm/W	100lm/W	100lm/W
<b>Beam angle</b>	120°	120°	120°
<b>IP Rating</b>	IP54	IP54	IP54
<b>IK Rating</b>	IK10	IK10	IK10
<b>Lifetime</b>	L80 50,000h	L80 50,000h	L80 50,000h
<b>Warranty</b>	5 years	5 years	5 years

Beam Angles 120°




	Slice Long 900	Slice Long 1200	Slice Circle 1500
<b>CCT</b>	3000K/4000K	3000K/4000K	3000K/4000K
<b>CRI</b>	>90	>90	>90
<b>SDCM</b>	<3	<3	<3
<b>UGR</b>	<23	<23	<23
<b>Power</b>	32/24W	38/29W	50/40W
<b>Lumen</b>	3200lm/ 2400lm	3800lm/ 2900lm	5000lm/4000lm
<b>Driver</b>	Non-Dimmable/ Phase cut / DALI	Non-Dimmable/ Phase cut / DALI	Non-Dimmable/ Phase cut / DALI
<b>Functions</b>	Emergency lighting / Motion sensor	Emergency lighting / Motion sensor	Emergency lighting / Motion sensor
<b>Efficacy</b>	100lm/W	100lm/W	100lm/W
<b>Beam angle</b>	120°	120°	120°
<b>IP Rating</b>	IP54	IP54	IP54
<b>IK Rating</b>	IK10	IK10	IK10
<b>Lifetime</b>	L80 50,000h	L80 50,000h	L80 50,000h
<b>Warranty</b>	5 years	5 years	5 years

Beam Angles 120°

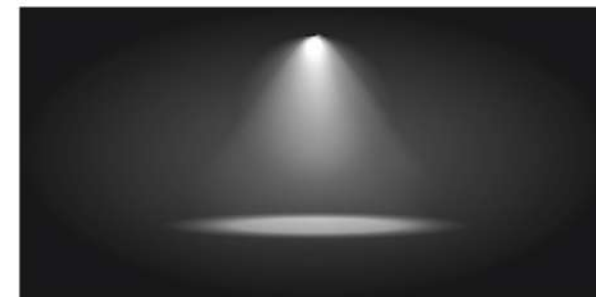



# FUOCO ROUND

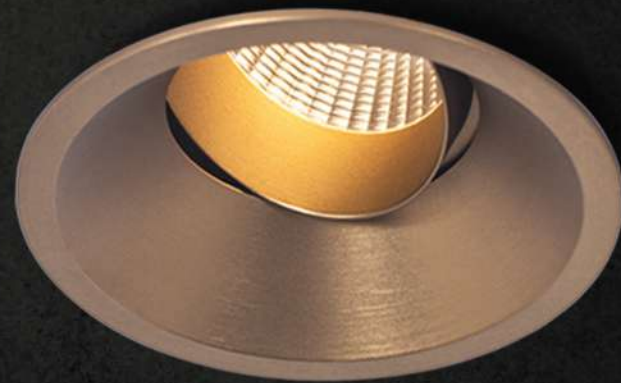

## Classic, Durability, and Versatility

Along with its minimal design and fine finishing, the Fuoco series offers a wide range of mounting options and maximum visual comfort, making it ideal for all applications.







### Finishes






	Fuoco Round Trim	Fuoco Round Trim CNC	Fuoco Round Trim Adjustable	Fuoco Out Round
CCT	3000K / 4000k	3000K / 4000k	3000K / 4000k	3000K / 4000k
CRI	>92	>97	>97	>97
SDCM	<3	<2	<2	<2
UGR	<19 / <16	<19	<19	<19
Power	10W	10W	10W	10W
Lumen	1002lm / 957lm / 1040lm / 960lm	971lm	971lm	971lm
Driver	Phase cut / DALI	Phase cut / DALI	Phase cut / DALI	Phase cut / DALI
Efficacy	100lm/W / 95lm/W	100lm/W	100lm/W	100lm/W
Beam angle	15°/24°/36°/60°	15°/24°/36°/60°	15°/24°/36°/60°	15°/24°/36°/60°
IP Rating	IP54	IP54	IP54	IP54
IK Rating	IK08	IK08	IK08	IK08
Insulating Rating	-	IC-4	IC-4	IC-4
Lifetime	L90 B10 50,000h	L90 B10 50,000h	L90 B10 50,000h	L90 B10 50,000h
Die-cut	Dia82*H75, Cutout:75	Dia97*H81, Cutout:90	Dia82*H75, Cutout:75	97*97*H81,Cutout:90X90
Warranty	5 years	5 years	5 years	5 years
Mounting	Trimless Recessed, Recessed, Surface mounted, Suspension			

### Beam Angles 15°/24°/36°/60°





Finishes



Finishes




	Fuoco Round Trimless Fixed	Fuoco Round Trimless Adjustable	Fuoco Move Out	Fuoco Move Out CNC
CCT	3000K / 4000k	3000K / 4000k	3000K / 4000k	3000K / 4000k
CRI	>92	>92	>97	>97
SDCM	<3	<3	<2	<2
UGR	<19 / <16	<19 / <16	<19	<19
Power	10W	10W	10W	10W
Lumen	1029lm / 980lm / 1085lm / 1000lm	1035lm / 975lm / 1075lm / 1008lm	600lm	600lm
Driver	Phase cut / DALI	Phase cut / DALI	Phase cut / DALI	Phase cut / DALI
Efficacy	100lm/W / 95lm/W	100lm/W / 95lm/W	100lm/W	100lm/W
Beam angle	15°/24°/36°/60°	15°/24°/36°/60°	36°	36°
IP Rating	IP54	IP54	IP54	IP54
IK Rating	IK08	IK08	IK08	IK08
Insulating Rating	-	-	IC-4	IC-4
Lifetime	L90 B10 50,000h	L90 B10 50,000h	L90 B10 50,000h	L90 B10 50,000h
Die-cut	Dia82*H75, Cutout:75	Dia97*H81, Cutout:90	-	-
Warranty	5 years	5 years	5 years	5 years
Mounting	Trimless Recessed, Recessed, Surface mounted, Suspension			

	Fuoco Round Pendant	Fuoco Round Pendant Adjustable	Fuoco Duo Recessed
CCT	3000K	3000K	3000K
CRI	>92	>92	>92
SDCM	<3	<3	<3
UGR	<19	<19	<19
Power	10W	10W	20W
Lumen	975lm	915lm	2000lm
Driver	Phase cut / DALI	Phase cut / DALI	Phase cut / DALI
Efficacy	95lm/W	89lm/W	100lm/W
Beam angle	24°/36°/60°	24°/36°/60°	24°/36°/60°
IP Rating	IP20/IP54	IP20/IP54	IP54
IK Rating	IK08	IK08	IK08
Lifetime	L90 B10 50,000h	L90 B10 50,000h	L90 B10 50,000h
Warranty	5 years	5 years	5 years
Mounting	Trimless Recessed, Recessed, Surface mounted, Suspension		

Beam Angles 15°/24°/36°/60°



Beam Angles 15°/24°/36°/60°

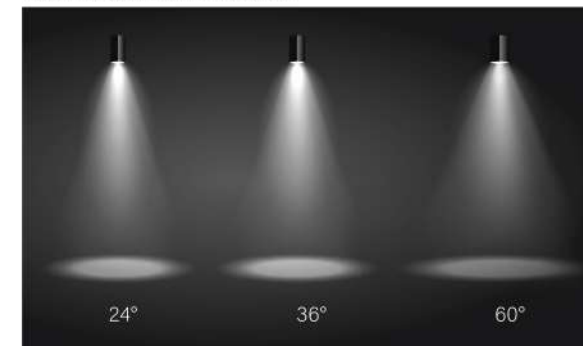



# FUOCO SQUARE

## Classic, Durability, and Versatility

Along with its minimal design and fine finishing, the Fuoco series offers a wide range of mounting options and maximum visual comfort, making it ideal for all applications.



Finishes



	Fuoco Square Trim	Fuoco Square Trim Adjustable	Fuoco Square Trimless Fixed	Fuoco Square Trimless Adjustable
CCT	3000K / 4000k	3000K / 4000k	3000K	3000K
CRI	>92	>92	>92	>92
SDCM	<3	<3	<3	<3
UGR	<19 / <16	<19 / <16	<19 / <16	<19 / <16
Power	10W	10W	10W	10W
Lumen	1029lm / 980lm / 1085lm / 1000lm	1035lm / 975lm / 1075lm / 1008lm	1002lm / 1016lm	1029lm / 1035lm
Driver	Phase cut / DALI	Phase cut / DALI	Phase cut / DALI	Phase cut / DALI
Efficacy	100lm/W / 95lm/W	100lm/W / 95lm/W	100lm/W	100lm/W
Beam angle	15°/24°/36°/60°	15°/24°/36°/60°	24°/36°/60°	24°/36°/60°
IP Rating	IP54	IP54	IP54	IP54
IK Rating	IK08	IK08	IK08	IK08
Lifetime	L90 B10 50,000h	L90 B10 50,000h	L90 B10 50,000h	L90 B10 50,000h
Die-cut	Dia82*H75, Cutout:75	97*97*H81,Cutout:90X90	Dia77*H75, Cutout:85	75.5*75.5*H75, Cutout:88X88
Warranty	5 years	5 years	5 years	5 years
Mounting	Trimless Recessed, Recessed, Surface mounted, Suspension			

Beam Angles 15°/24°/36°/60°





# PURA


Perfectly design. Perfectly even.  
Perfectly round.

The Pura Trim is a clean, durable design style that reveals an architectonic and balanced character. Its various functions, multiple applications and uniform light distribution, can be used in all areas.

npk design, The Netherlands





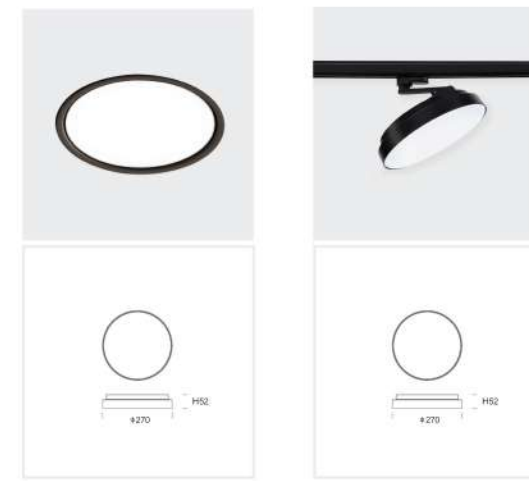

	Pura Trim 270	Pura Trim 270 Suspension	Pura Trim 350	Pura Trim 350 Suspension
<b>CCT</b>	3000K/4000K	3000K/4000K	3000K/4000K	3000K/4000K
<b>CRI</b>	>90	>90	>90	>90
<b>SDCM</b>	<3	<3	<3	<3
<b>UGR</b>	<23	<23	<23	<23
<b>Power</b>	24/18/10W	24/18/10W	32/24W	32/24W
<b>Lumen</b>	2400lm/1800lm/1000lm	2400lm/1800lm/1000lm	3200lm/2400lm	3200lm/2400lm
<b>Driver</b>	Phase cut / DALI	Phase cut / DALI	Phase cut / DALI	Phase cut / DALI
<b>Functions</b>	2W Emergency 90mins (Lithium cell) / CF Motion sensor	2W Emergency 90mins (Lithium cell) / CF Motion sensor	2W Emergency 90mins (Lithium cell) / CF Motion sensor	2W Emergency 90mins (Lithium cell) / CF Motion sensor
<b>Efficacy</b>	100lm/W	100lm/W	100lm/W	100lm/W
<b>Beam angle</b>	120°	120°	120°	120°
<b>IP Rating</b>	IP54	IP54	IP54	IP54
<b>IK Rating</b>	IK10	IK10	IK10	IK10
<b>Lifetime</b>	L80 50,000h	L80 50,000h	L80 50,000h	L80 50,000h
<b>Warranty</b>	5 years	5 years	5 years	5 years


	Pura Trim 270 Recessed	Pura Trim 270 Track Light
<b>CCT</b>	3000K/4000K	3000K/4000K
<b>CRI</b>	>90	>90
<b>SDCM</b>	<3	<3
<b>UGR</b>	<23	<23
<b>Power</b>	24/18/10W	24/18/10W
<b>Lumen</b>	2400lm/1800lm/1000lm	2400lm/1800lm/1000lm
<b>Driver</b>	Phase cut / DALI	Phase cut / DALI
<b>Functions</b>	2W Emergency 90mins (Lithium cell) / CF Motion sensor	2W Emergency 90mins (Lithium cell) / CF Motion sensor
<b>Efficacy</b>	100lm/W	100lm/W
<b>Beam angle</b>	120°	120°
<b>IP Rating</b>	IP54	IP54
<b>IK Rating</b>	IK10	IK10
<b>Lifetime</b>	L80 50,000h	L80 50,000h
<b>Warranty</b>	5 years	5 years

Beam Angles 120°



Beam Angles 120°



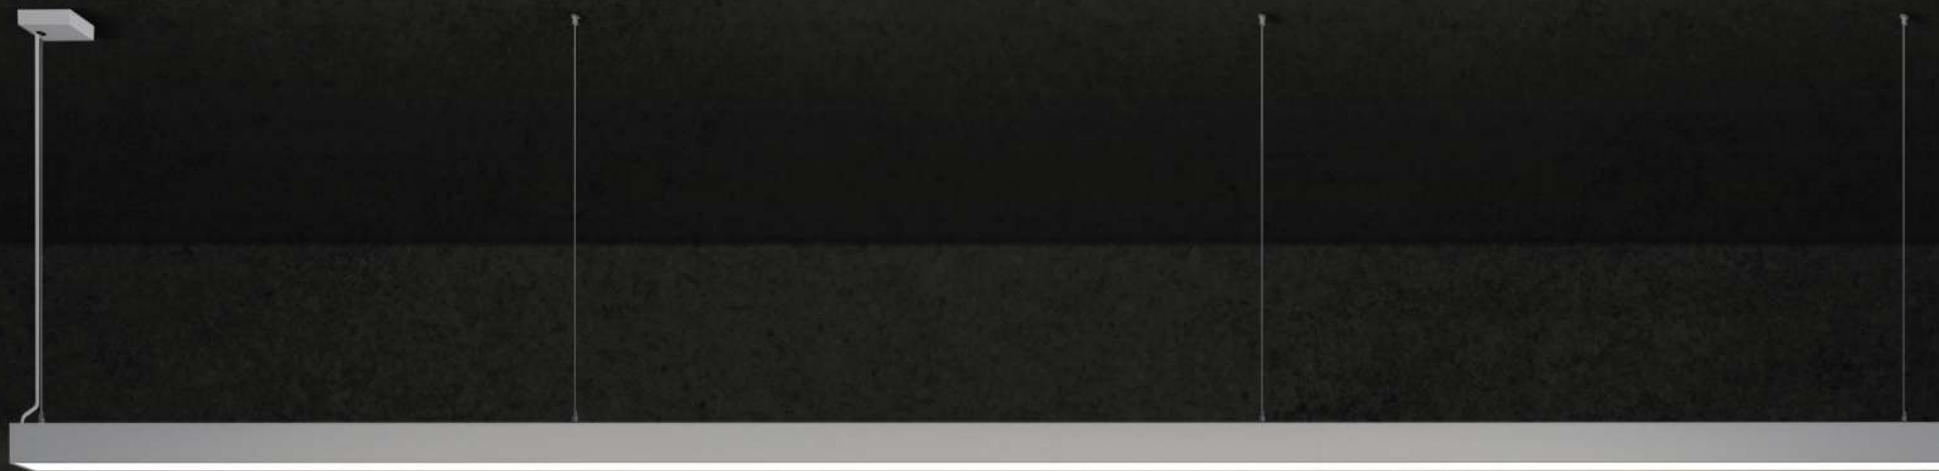




# METRICO

Perfectly integrated into contemporary architecture

Offering a classic and sleek design of Metrico linear light providing outstanding efficiency and visual comfort for both residential and commercial applications. It's indirect/direct (Up/Down) lighting. Suitable for installations requiring  $UGR < 19$  for the office environment. The linkable design solution can be configured and customised to suit any space with a wide range of accessories. Delivering high efficiency 130lm/W with flicker free driver. Available in 1.2m and 1.5 lengths.





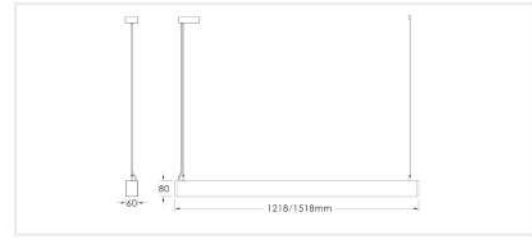
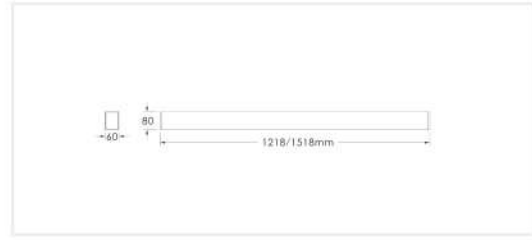
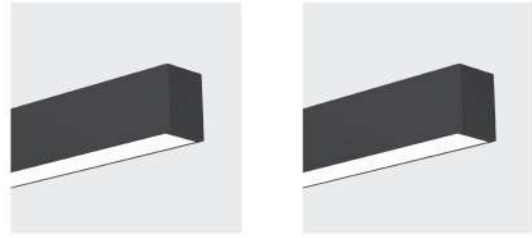


Finishes



	Metrico Surface 1200	Metrico Surface 1500	Metrico Pendant 1200 Office	Metrico Pendant 1500 Office
<b>CCT</b>	3000K/4000K/ 6000K	3000K/4000K/ 6000K	3000K/4000K/ 6000K	3000K/4000K/ 6000K
<b>CRI</b>	>90	>90	>90	>90
<b>SDCM</b>	<3	<3	<3	<3
<b>UGR</b>	<19	<19	<19	<19
<b>Power</b>	40W	50W	30W	40W
<b>Lumen</b>	4800lm	6000lm	3600lm	4800lm
<b>Driver</b>	Non-Dimmable / Phase cut / DALI	Non-Dimmable / Phase cut / DALI	Non-Dimmable / Phase cut / DALI	Non-Dimmable / Phase cut / DALI
<b>IP Rating</b>	IP20	IP20	IP20	IP20
<b>Lifetime</b>	L80 50,000h	L80 50,000h	L80 50,000h	L80 50,000h
<b>Warranty</b>	5 years	5 years	5 years	5 years

Beam Angles 90°

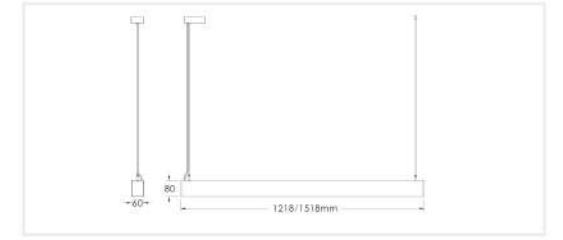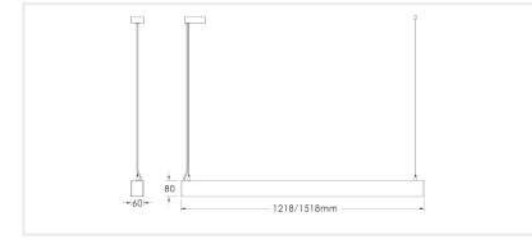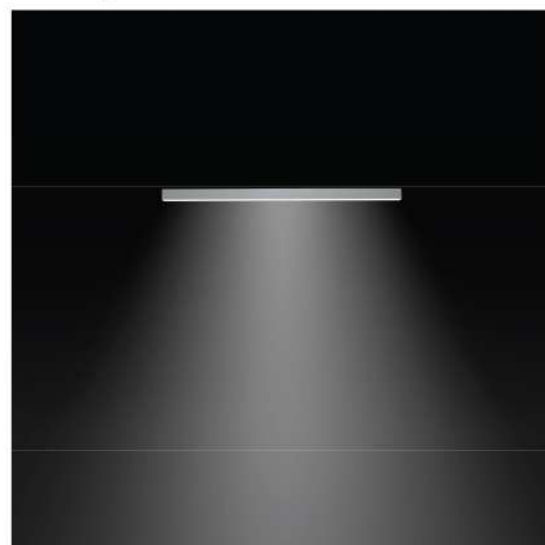



Finishes



	Metrico Pendant 1200-15 Indirect	Metrico Pendant 1200-30 Indirect	Metrico Pendant 1500-18 Indirect	Metrico Pendant 1500-36 Indirect
<b>CCT</b>	3000K/4000K/ 6000K	3000K/4000K/ 6000K	3000K/4000K/ 6000K	3000K/4000K/ 6000K
<b>CRI</b>	>90	>90	>90	>90
<b>SDCM</b>	<3	<3	<3	<3
<b>UGR</b>	<19	<19	<19	<19
<b>Power</b>	35W/15W	20W/30W	42W/18W	24W/36W
<b>Lumen</b>	4550lm/ 1950lm	2500lm/ 3750lm	5460lm/ 2340lm	3000lm/ 4500lm
<b>Driver</b>	Non-Dimmable / Phase cut / DALI	Non-Dimmable / Phase cut / DALI	Non-Dimmable / Phase cut / DALI	Non-Dimmable / Phase cut / DALI
<b>IP Rating</b>	IP20	IP20	IP20	IP20
<b>Lifetime</b>	L80 50,000h	L80 50,000h	L80 50,000h	L80 50,000h
<b>Warranty</b>	5 years	5 years	5 years	5 years

Beam Angles ↑110° 90°↓

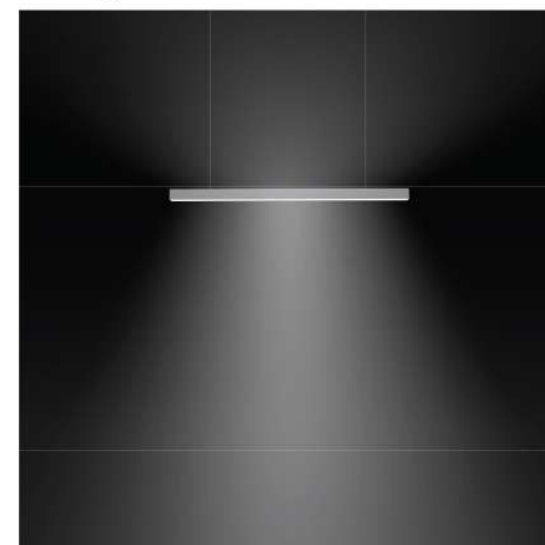

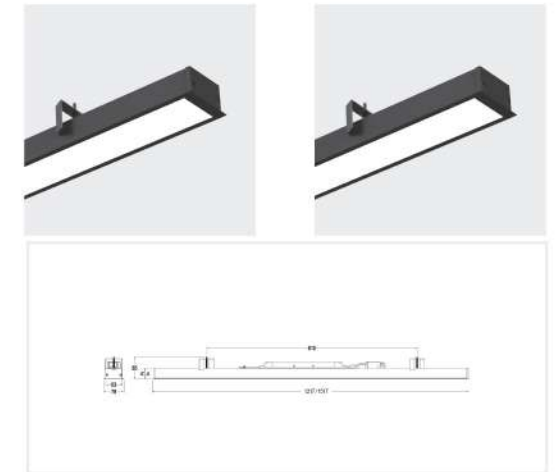


Finishes



	Metrico Recessed 1200	Metrico Recessed 1500
CCT	3000K/4000K/ 6000K	3000K/4000K/ 6000K
CRI	>90	>90
SDCM	<3	<3
UGR	<19	<19
Power	40W	50W
Lumen	4400lm	6000lm
Driver	Non-Dimmable / Phase cut / DALI	Non-Dimmable / Phase cut / DALI
IP Rating	IP20	IP20
Lifetime	L80 50,000h	L80 50,000h
Warranty	5 years	5 years

Beam Angles 90°

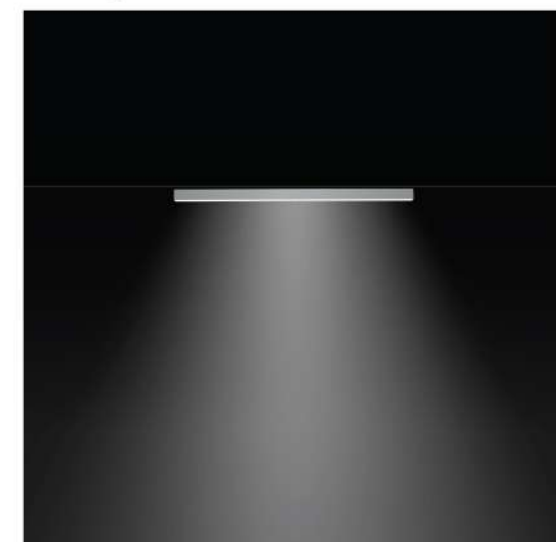



# STRIPLINE

A perfect blend of intensity, colour and direct for comfortable working environment

It's functional and minimal design with clean, elegant lines makes StripLine a timeless classic in office lighting. This series features various applications, a mix of different colour temperatures, direct and indirect lighting, high efficiency 135lm/W and smart functions.

Offer both DALI, Bluetooth dimming and comes with 5 year warranty.




Finishes



	StripLine 1200 Pendant	StripLine 1500 Pendant	StripLine Floor BD	StripLine Floor CD
CCT	3000K/4000K/ 6000K	3000K/4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 5700K
CRI	>80	>80	>80	>80
SDCM	<3	<3	<3	<3
UGR	<6	<19	<11	<11
Power	↑36W/ 24W↓	↑42W/28W↓	↑60W/20W↓	↑36W/24W↓
Lumen	↑6010lm/2900lm↓	↑7000lm/3400lm↓	↑8300lm / 1700lm↓	↑8300lm / 1700lm↓
Driver	Non-Dimmable / Phase cut / DALI	Non-Dimmable / Phase cut / DALI	-	-
IP Rating	IP20	IP20	IP20	IP20
Lifetime	L80 50,000h	L80 50,000h	L80 50,000h	L80 50,000h
Warranty	5 years	5 years	5 years	5 years

Beam Angles ↑115° 60°↓

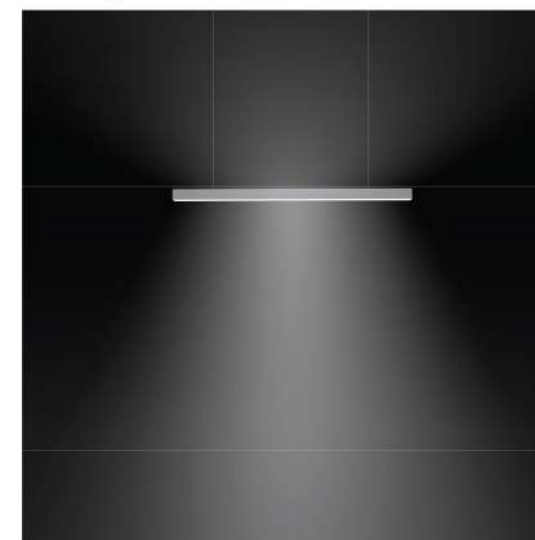



Extremely durable, high visual comfort, outstanding performance. Offering an ideal blend of beauty and safety for pathway lighting urban and residential spaces.

This robust bollard light designed in a form intermediate between a square and a round. Its anti-glare design ensures comfortable illumination, provide both safety and high performance to outdoor pathways and walkways. Available in two finishes, three sizes and with 180° or 360° light distribution options.




# DEFENDER

Robust and reliable in demanding circumstances





Finishes

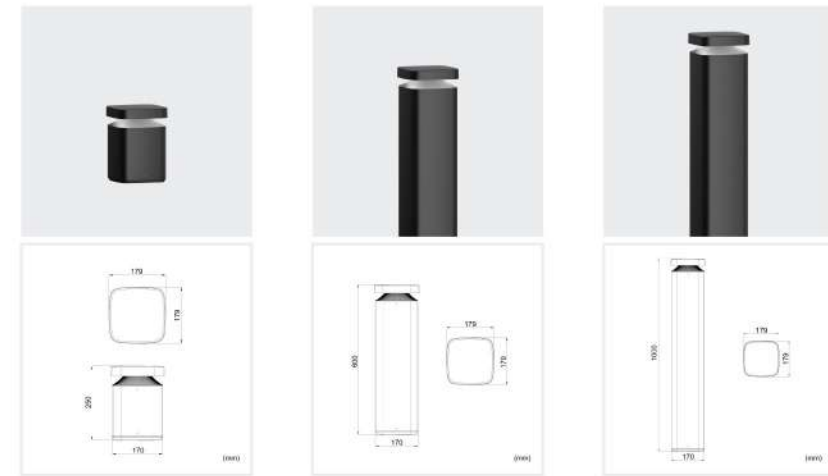

	Defender 250	Defender 600	Defender 1000
<b>Power</b>	12W/24W	12W/24W	12W/24W
<b>Lumens</b>	429lm / 988lm	429lm / 988lm	429lm / 988lm
<b>Efficacy</b>	35lm/W / 41lm/W	35lm/W / 41lm/W	35lm/W / 41lm/W
<b>Materials</b>	6063 Aluminium	6063 Aluminium	6063 Aluminium
<b>Beam Angle</b>	180° / 360°	180° / 360°	180° / 360°
<b>CCT</b>	3000K	3000K	3000K
<b>CRI</b>	>90	>90	>90
<b>Colour Deviation</b>	<3	<3	<3
<b>IP Rating</b>	IP65	IP65	IP65
<b>IK Rating</b>	IK10	IK10	IK10
<b>Driver</b>	No-dim / DALI	No-dim / DALI	No-dim / DALI
<b>Lifetime</b>	L80 B10 50,000h	L80 B10 50,000h	L80 B10 50,000h
<b>Warranty</b>	5 years	5 years	5 years

Beam Angles 360° / 180°

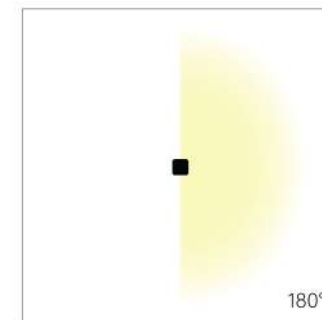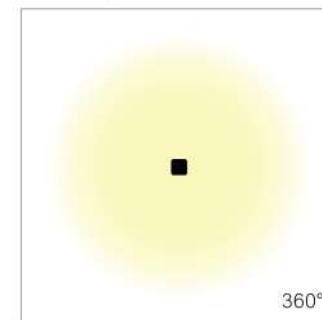



# NOVITA

Sleek and versatile wall light with gentle upward and downward illumination


Novita linear wall light combines refined simplicity, versatility and high quality offering lighting performance, visual comfort and the perfect ambience for the interior. This LED wall light is a great addition to halls, sideways, corridors, stairs, entrances. With IP44, particularly apt as a Vanity Light.




Finishes



	Novita 200	Novita 200	Novita 200	Novita 200	Novita 200
<b>Power</b>	7W	7W	7W	7W	7W
<b>Lumens</b>	450lm	450lm	450lm	450lm	450lm
<b>Materials</b>	Aluminium, opal diffuser	Aluminium, opal diffuser	Aluminium, opal diffuser	Aluminium, opal diffuser	Aluminium, opal diffuser
<b>Beam Angle</b>	120°	120°	120°	120°	120°
<b>CCT</b>	3000K / 4000k	3000K / 4000k	3000K / 4000k	3000K / 4000k	3000K / 4000k
<b>CRI</b>	>90	>90	>90	>90	>90
<b>SDCM</b>	<3	<3	<3	<3	<3
<b>IP Rating</b>	IP44	IP44	IP44	IP44	IP44
<b>UGR</b>	<14 (X=4H, Y=8H)	<14 (X=4H, Y=8H)	<14 (X=4H, Y=8H)	<14 (X=4H, Y=8H)	<14 (X=4H, Y=8H)
<b>Driver</b>	Triac / DALI dimming	Triac / DALI dimming	Triac / DALI dimming	Triac / DALI dimming	Triac / DALI dimming
<b>Lifetime</b>	L90 B10 50,000h	L90 B10 50,000h	L90 B10 50,000h	L90 B10 50,000h	L90 B10 50,000h
<b>Warranty</b>	5 years	5 years	5 years	5 years	5 years

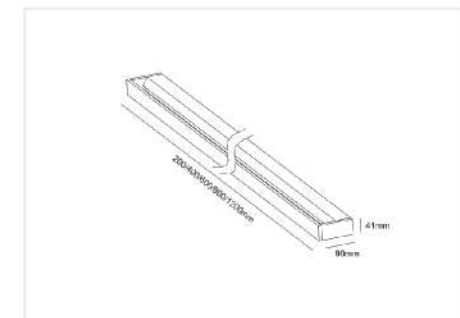

Beam Angles 120°

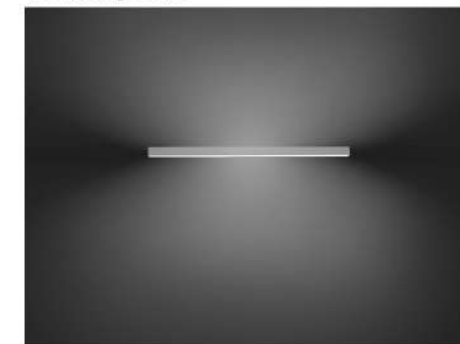







# STATIC

Providing modern, visual comfort and good-looking

The new latest update to the static spotlight continues to refine the aesthetic luminaire surface, giving the modern and sleek look and delivers the light in an extremely focused and precise way to the space.

npk design, The Netherlands




Finishes



	Static Essential Round	Static Classic Round
CCT	3000K	3000K
CRI	>90	>90
SDCM	<3	<3
UGR	<10	<10
Power	11W	11W
Lumen	950lm	950lm
Driver	Dimmable	Dimmable
Efficacy	86lm/W	86lm/W
Beam angle	15° / 24° / 38°	15° / 24° / 38°
IP Rating	IP54	IP54
IK Rating	IK08	IK08
Lifetime	L80, 50,000h	L80, 50,000h
Warranty	5 years	5 years
Dimension	D93.8mm*H85.3MM, Cutout: 80mm	D93.8mm*H85.3MM, Cutout: 80mm

Beam Angles 15° / 24° / 38°

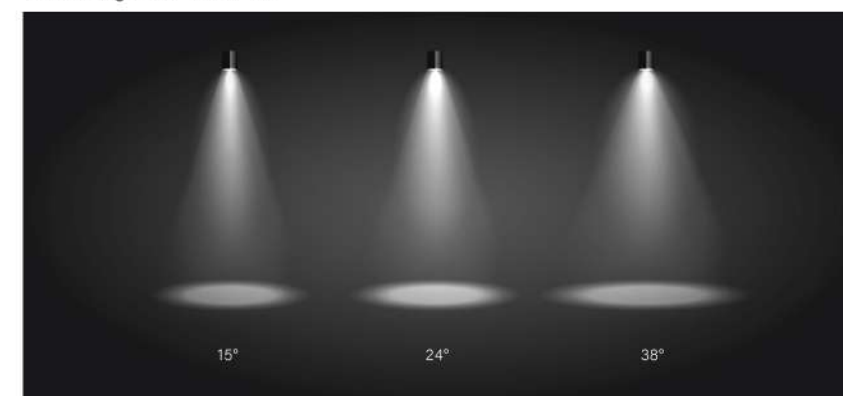





# SURFACE DOWNLIGHTS




Finishes



	Fuoco Round Surface	Fuoco Round Surface Adjustable	Fuoco Square Surface	Fuoco Square Surface Adjustable	Pura Build-on 100 IP65	Pura Build-on 150
CCT	3000K / 4000k	3000K / 4000k	3000K / 4000k	3000K / 4000k	3000K/4000K	3000K/4000K
CRI	>92	>92	>92	>92	>90	>90
SDCM	<3	<3	<3	<3	<3	<3
UGR	<19	<19	<19	<19	<19	<23
Power	10W	10W	10W	10W	10W	12/8W
Lumen	975lm / 855lm / 1008lm / 958lm	915lm / 955lm	865lm / 956lm / 1008lm / 958lm	915lm / 890lm / 955lm	845lm	1200lm/800lm
Driver	Phase cut	Phase cut	Phase cut	Phase cut	Phase cut	Phase cut
Efficacy	95lm/W	89lm/W	92lm/W	89lm/W	84lm/W	up to 100lm/W
Beam angle	24°/36°/60°	24°/36°/60°	24°/36°/60°	24°/36°/60°	24/36/60°	120°
IP Rating	IP20/IP54	IP20/IP54	IP20/IP54	IP20/IP54	IP65	IP20/IP44
IK Rating	IK08	IK08	IK08	IK08	IK10	IK10
Lifetime	L90 B10 50,000h	L90 B10 50,000h	L90 B10 50,000h	L90 B10 50,000h	L90 50,000h	L80 50,000h
Die-cut	D80mm*H165mm	D95mm*H165mm	D83.5mm*H165mm	D98.5mm*H165mm	-	-
Warranty	5 years	5 years	5 years	5 years	5 years	5 years

Beam Angles 24°/36°/60°/120°

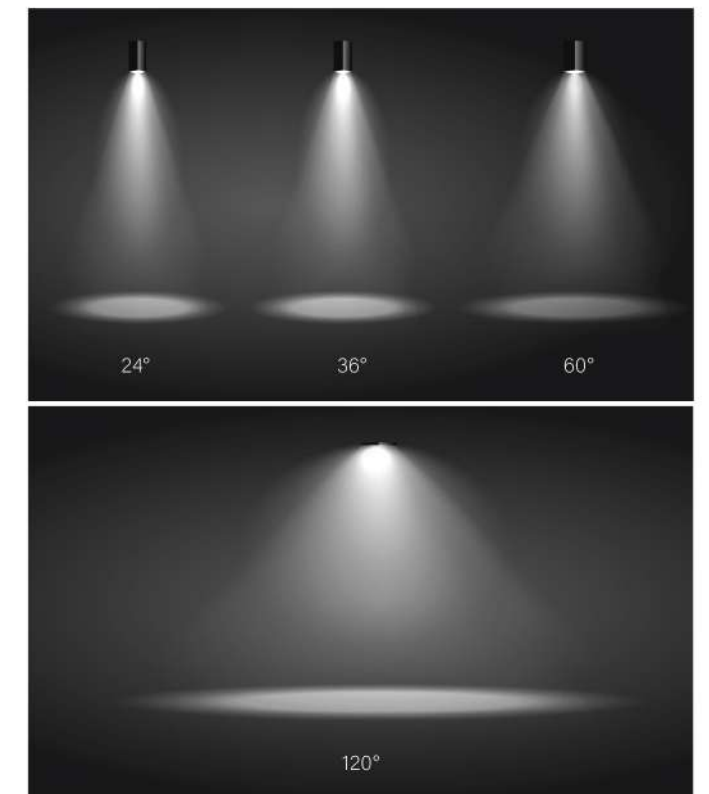





2



4



3



5



1



## MIX Track


A perfect combination of versatility and flexibility

Designed to the combination of accent lighting and ambient lighting to this track family to deliver a high-performance lighting solution. Compatible with 3 phase track system.

Finishes



Finishes



### 1 Disc 220 Track Light

### 2 Disc 300 Track Light

### 3 Pura Trim 270 Track light

### 4 Fusi 46 Spot Uno

### 5 Fusi 46 Spot Duo

<b>Materials</b>	Aluminium + Polycarbonat	Aluminium + Polycarbonat	Polycarbonate
<b>Power</b>	24W/18W Switch	24W/18W Switch	24W/18W/10W Switch
<b>Luminous Flux of Luminaire</b>	2400lm/1800lm	2400lm/1800lm	2400lm/1800lm/1000lm
<b>Colour Deviation</b>	SDCM<5	SDCM<5	SDCM<3
<b>Unified Glare Rating</b>	UGR<22 (X=4H, Y=8H)	UGR<22 (X=4H, Y=8H)	UGR<23 (X=4H, Y=8H)

<b>Materials</b>	Powder Coated Aluminium	Powder Coated Aluminium
<b>Adjustability</b>	355° Rotation, 90° Tilt	355°Rotation, 180° Tilt
<b>Power</b>	11W/8W	20W/15W
<b>Luminous Flux of Luminaire</b>	780lm/620lm	1500lm/1200lm

<b>Adjustability</b>	350° Rotation, 90° Tilt	<b>IK Rating</b>	IK10
<b>Beam Angle</b>	120°	<b>Driver</b>	Non-Dimmable / Phase cut / DALI
<b>CCT</b>	3000K/4000K Switch	<b>Lifetime</b>	L80 50,000h
<b>Colour Rendering</b>	CRI>90	<b>Accessories</b>	3 Circuit track adapter
<b>IP Rating</b>	IP20	<b>Warranty</b>	5 Years

<b>Track Compatibility</b>	3 Circuit	<b>IP Rating</b>	IP20
<b>Beam Angle</b>	15°/24°/36°/50°	<b>IK Rating</b>	IK10
<b>CCT</b>	3000K/4000K, 2700K on request	<b>Driver</b>	Non-Dimmable / Phase cut / DALI
<b>Colour Rendering</b>	CRI>95	<b>Lifetime</b>	L80 50,000h
<b>Colour Deviation</b>	SDCM<3	<b>Accessories</b>	Honeycomb Louver, Cross Louver
<b>Unified Glare Rating</b>	UGR<13	<b>Warranty</b>	5 Years



Contact us for samples

Head Office  
Unit 10, 80 O'Riordan Street, Alexandria NSW 2015

Phone  
+61 2 8065 8181

Email  
sales@purati.com

