

# DEFENDER

Robust and reliable in demanding circumstances



High resistance to environmental conditions | IK10 rating | IP65 rating | 5-year warranty




## Materials and finishes

Corrosion-resistant die-cast aluminium  
UV-stabilised PC lens  
Durable powder-coated finish



Less than 4%  
upward lumen output

Designed for  
anti-glare control and  
uniform illumination

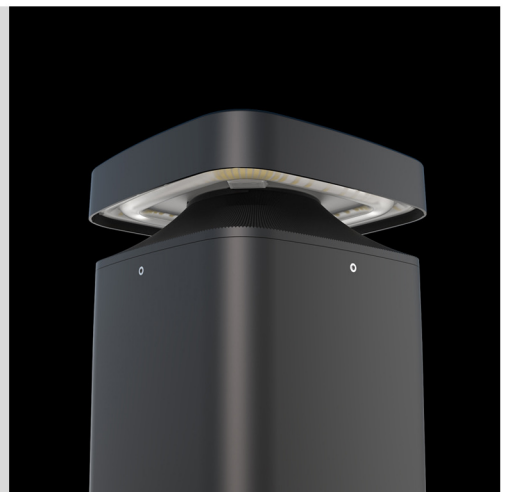








# DEFENDER

## Robust and reliable in demanding circumstances

Extremely durable, high visual comfort, outstanding performance. Offering an ideal blend of beauty and safety for pathway lighting urban and residential spaces.

This robust bollard light designed in a form intermediate between a square and a round. Its anti-glare design ensures comfortable illumination, provide both safety and high performance to outdoor pathways and walkways. Available in two finishes, three sizes and with 180° or 360° light distribution options.

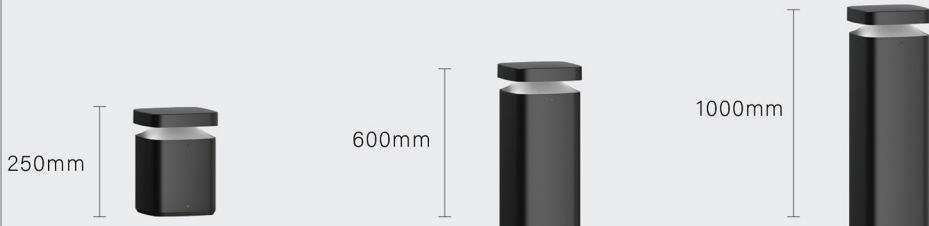 Finishes 			
	<b>Defender 250</b>	<b>Defender 600</b>	<b>Defender 1000</b>
<b>Power</b>	12W/24W	12W/24W	12W/24W
<b>Lumens</b>	429lm / 988lm	429lm / 988lm	429lm / 988lm
<b>Efficacy</b>	35lm/W / 41lm/W	35lm/W / 41lm/W	35lm/W / 41lm/W
<b>Materials</b>	6063 Aluminium	6063 Aluminium	6063 Aluminium
<b>Beam Angle</b>	180° / 360°	180° / 360°	180° / 360°
<b>CCT</b>	3000K	3000K	3000K
<b>CRI</b>	>90	>90	>90
<b>Colour Deviation</b>	<3	<3	<3
<b>IP Rating</b>	IP65	IP65	IP65
<b>IK Rating</b>	IK10	IK10	IK10
<b>Driver</b>	No-dim / DALI	No-dim / DALI	No-dim / DALI
<b>Lifetime</b>	L80 B10 50,000h	L80 B10 50,000h	L80 B10 50,000h
<b>Warranty</b>	5 years	5 years	5 years

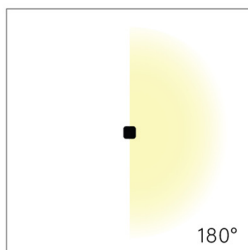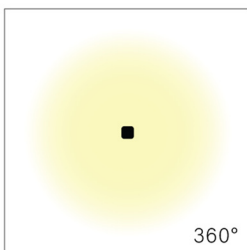

WWW.PURATI.COM