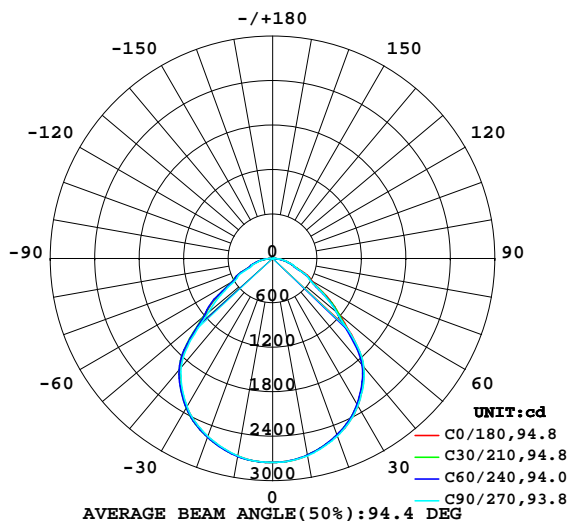
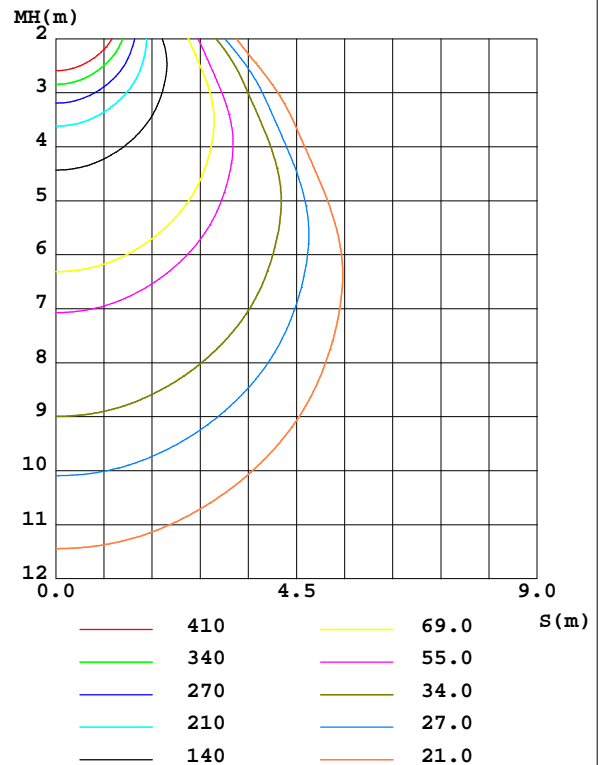


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:229.02V I:0.2428A P:51.914W PF:0.9338 Freq:50.01Hz Lamp Flux:6243.46x1 lm		
NAME: Compo 900 55W WW	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 120.26 lm/W
MODEL		I _{max} (cd)	2752	S/MH(C0/180)	1.25	
NOMINAL POWER(W)	55	LOR(%)	100.0	S/MH(C90/270)	1.24	
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	6243.5	η UP,DN(C0-180)	0.2,49.2	
NOMINAL FLUX(lm)	6243.46	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.2,50.5	
LAMPS INSIDE	1	η up(%)	0.3	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	229.5	η down(%)	99.7	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:Mr.Ma
Test Date:2023-08-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.100m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM
ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	2699	2694	2704	2703	2707	2712	2706	2706	0- 10	260.6	260.6	4.17,4.17
20	2545	2534	2550	2550	2559	2569	2554	2554	10- 20	744.4	1005	16.1,16.1
30	2299	2277	2302	2300	2315	2332	2312	2309	20- 30	1126	2131	34.1,34.1
40	1911	1885	1913	1912	1943	1964	1922	1927	30- 40	1330	3461	55.4,55.4
50	1171	1143	1123	1144	1212	1217	1127	1136	40- 50	1197	4658	74.6,74.6
60	616.8	593.7	579.1	597.2	627.3	638.9	582.3	590.4	50- 60	780.6	5438	87.1,87.1
70	306.8	307.2	309.5	309.7	330.7	328.8	301.2	305.2	60- 70	456.1	5895	94.4,94.4
80	152.0	135.5	151.6	150.2	160.9	168.9	155.3	155.0	70- 80	252.0	6147	98.4,98.4
90	0.8938	0.8745	0.8241	0.8774	1.551	5.148	1.084	1.206	80- 90	77.27	6224	99.7,99.7
100	1.624	1.635	1.525	1.550	1.695	1.652	1.688	1.678	90-100	1.404	6225	99.7,99.7
110	2.725	2.729	2.578	2.617	2.712	2.670	2.700	2.682	100-110	2.250	6227	99.7,99.7
120	3.653	3.635	3.521	3.625	3.641	3.615	3.653	3.630	110-120	3.155	6231	99.8,99.8
130	4.047	3.955	3.908	4.046	3.885	3.986	4.012	3.994	120-130	3.450	6234	99.8,99.8
140	4.143	3.984	3.973	4.134	3.883	4.046	4.069	4.050	130-140	3.109	6237	99.9,99.9
150	4.346	4.166	4.262	4.391	4.092	4.269	4.297	4.293	140-150	2.594	6240	99.9,99.9
160	4.418	4.281	4.471	4.475	4.215	4.440	4.440	4.458	150-160	2.010	6242	100,100
170	4.535	4.364	4.555	4.483	4.437	4.696	4.660	4.489	160-170	1.261	6243	100,100
180	4.568	4.523	4.625	4.587	4.568	4.525	4.619	4.591	170-180	0.4331	6243	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

Conical surface Flux(90deg): 4113.6 lm

%lum = 65.9%

%lamp = 65.9%

Conical surface Flux(130deg): 5702.8 lm

%lum = 91.3%

%lamp = 91.3%

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Mr.Ma
Test Date:2023-08-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.100m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:229.02V I:0.2428A P:51.914W PF:0.9338 Freq:50.01Hz
Lamp Flux:6243.46x1 lm

NAME: Compo 900 55W WW

TYPE:

WEIGHT:

SPEC.:

DIM.:

SERIAL No.:


MFR.: PURATI PTY LTD

SUR.:

Shielding Angle:

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

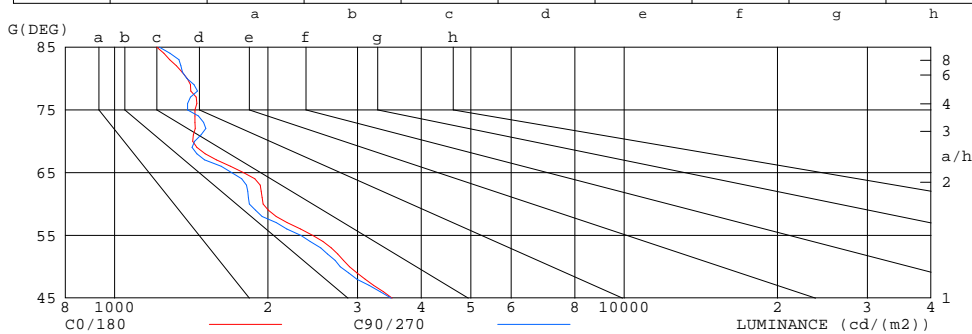

LUMINANCE cd/(m2)

G(DEG)	C0/180	C90/270
85	1211	1224
80	1388	1386
75	1439	1391
70	1423	1437
65	1792	1697
60	1957	1839
55	2449	2320
50	2890	2773
45	3504	3488


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Mr. Ma
Test Date: 2023-08-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity: 65.0%
Test Distance: 6.100m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:229.02V I:0.2428A P:51.914W PF:0.9338 Freq:50.01Hz Lamp Flux:6243.46x1 lm		
NAME: Compo 900 55W WW	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.06	1.02	.99	1.04	1.00	.97	.99	.97	.94	.95	.93	.91	.92	.90	.88	.86
2.0	.94	.88	.83	.92	.87	.82	.89	.84	.80	.85	.82	.78	.82	.79	.76	.74
3.0	.84	.77	.71	.82	.76	.70	.79	.74	.69	.77	.72	.68	.74	.70	.66	.64
4.0	.75	.67	.61	.74	.67	.61	.72	.65	.60	.69	.64	.59	.67	.62	.58	.56
5.0	.68	.60	.54	.67	.59	.53	.65	.58	.53	.63	.57	.52	.61	.56	.52	.50
6.0	.62	.53	.47	.61	.53	.47	.59	.52	.47	.57	.51	.46	.56	.50	.46	.44
7.0	.56	.48	.42	.55	.48	.42	.54	.47	.42	.53	.46	.42	.51	.46	.41	.39
8.0	.52	.44	.38	.51	.43	.38	.50	.43	.38	.48	.42	.38	.47	.42	.37	.35
9.0	.48	.40	.35	.47	.40	.34	.46	.39	.34	.45	.39	.34	.44	.38	.34	.32
10.0	.44	.36	.31	.43	.36	.31	.42	.36	.31	.42	.35	.31	.41	.35	.31	.29

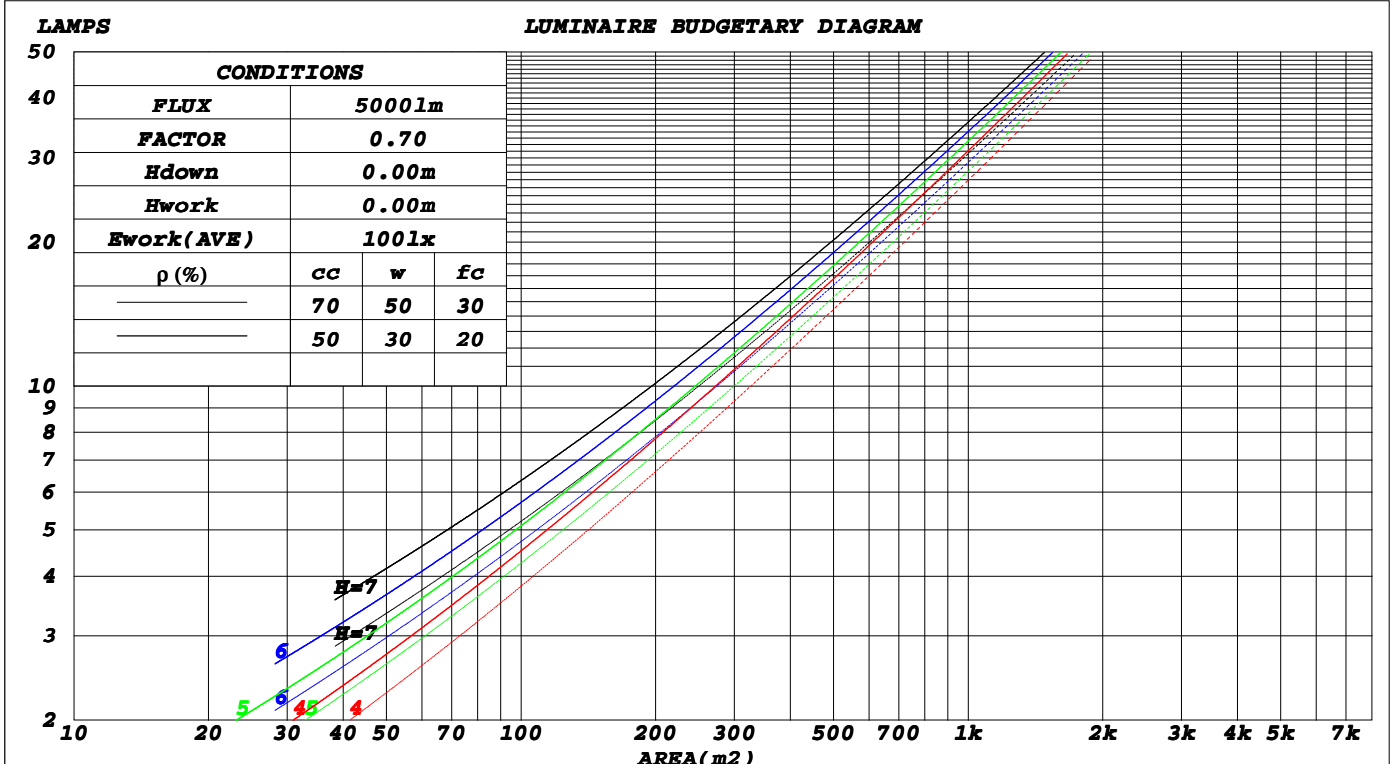

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Mr.Ma
Test Date: 2023-08-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity: 65.0%
Test Distance: 6.100m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:229.02V I:0.2428A P:51.914W PF:0.9338 Freq:50.01Hz Lamp Flux:6243.46x1 lm		
NAME: Compo 900 55W WW	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0														
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
ρ_{fc}	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.269	.153	.048	.262	.149	.047	.249	.143	.046	.237	.136	.044	.225	.131	.042															
2.0	.256	.140	.043	.250	.138	.042	.239	.133	.041	.228	.128	.040	.218	.123	.039															
3.0	.240	.128	.038	.235	.126	.038	.225	.122	.037	.215	.118	.036	.207	.114	.035															
4.0	.225	.117	.034	.220	.115	.034	.211	.112	.033	.203	.109	.033	.195	.106	.032															
5.0	.210	.107	.031	.206	.106	.031	.198	.103	.030	.190	.100	.030	.184	.098	.029															
6.0	.197	.099	.028	.193	.097	.028	.186	.095	.028	.179	.093	.027	.173	.091	.027															
7.0	.185	.091	.026	.181	.090	.026	.175	.088	.025	.169	.087	.025	.163	.085	.025															
8.0	.174	.085	.024	.171	.084	.024	.165	.082	.024	.160	.081	.023	.155	.079	.023															
9.0	.164	.079	.022	.161	.079	.022	.156	.077	.022	.151	.076	.022	.147	.074	.022															
10.0	.155	.074	.021	.152	.074	.021	.148	.072	.020	.143	.071	.020	.139	.070	.020															

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.180	.159	.140	.154	.136	.120	.105	.094	.083	.061	.054	.048	.019	.017	.016	
2.0	.170	.135	.105	.146	.116	.091	.100	.080	.063	.058	.047	.037	.018	.015	.012	
3.0	.161	.117	.081	.138	.101	.070	.095	.070	.049	.055	.041	.029	.018	.013	.010	
4.0	.153	.103	.064	.132	.089	.056	.090	.062	.039	.052	.036	.023	.017	.012	.008	
5.0	.146	.092	.053	.125	.080	.046	.086	.056	.032	.050	.033	.019	.016	.011	.006	
6.0	.139	.084	.044	.119	.072	.038	.082	.051	.027	.048	.030	.016	.015	.010	.005	
7.0	.133	.077	.038	.114	.067	.033	.079	.047	.023	.046	.027	.014	.015	.009	.005	
8.0	.126	.071	.033	.109	.061	.029	.075	.043	.020	.044	.025	.012	.014	.008	.004	
9.0	.121	.066	.029	.104	.057	.025	.072	.040	.018	.042	.024	.011	.014	.008	.004	
10.0	.116	.062	.026	.100	.054	.023	.069	.038	.016	.040	.022	.010	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:Mr.Ma
Test Date:2023-08-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.100m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:229.02V I:0.2428A P:51.914W PF:0.9338 Freq:50.01Hz Lamp Flux:6243.46x1 lm										
NAME: Compo 900 55W WW					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: PURATI PTY LTD					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	9.0	10.4	9.2	10.6	10.8	8.8	10.2	9.1	10.4	10.6
3H	9.7	10.9	10.0	11.2	11.4	9.5	10.8	9.8	11.0	11.2
4H	10.0	11.2	10.3	11.5	11.7	9.8	11.0	10.2	11.3	11.5
6H	10.3	11.4	10.6	11.7	12.0	10.2	11.3	10.5	11.6	11.8
8H	10.4	11.5	10.7	11.8	12.1	10.3	11.4	10.6	11.6	11.9
12H	10.5	11.5	10.8	11.8	12.1	10.3	11.4	10.7	11.7	12.0
4H 2H	9.2	10.4	9.5	10.7	10.9	9.1	10.3	9.4	10.5	10.8
3H	10.1	11.1	10.4	11.4	11.7	9.9	11.0	10.3	11.3	11.6
4H	10.6	11.5	10.9	11.8	12.2	10.4	11.4	10.8	11.7	12.0
6H	11.0	11.8	11.4	12.2	12.6	10.9	11.7	11.3	12.1	12.4
8H	11.2	11.9	11.6	12.3	12.7	11.0	11.8	11.5	12.2	12.6
12H	11.3	12.0	11.7	12.4	12.8	11.2	11.9	11.6	12.3	12.7
8H 4H	10.7	11.5	11.1	11.9	12.2	10.6	11.4	11.0	11.7	12.1
6H	11.3	11.9	11.7	12.3	12.8	11.2	11.8	11.6	12.2	12.6
8H	11.5	12.1	12.0	12.5	13.0	11.4	12.0	11.9	12.4	12.8
12H	11.7	12.2	12.2	12.6	13.1	11.6	12.1	12.1	12.5	13.0
12H 4H	10.7	11.4	11.1	11.8	12.2	10.6	11.3	11.0	11.7	12.1
6H	11.3	11.9	11.8	12.3	12.8	11.2	11.8	11.7	12.2	12.6
8H	11.6	12.1	12.0	12.5	13.0	11.5	12.0	11.9	12.4	12.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.5 / - 0.5					+ 0.5 / - 0.6				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.9 / - 0.7					+ 1.0 / - 0.8				

CIE Pub.117, 6243 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 6.4$)
Area: 0.63 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:Mr.Ma
Test Date:2023-08-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.100m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:229.02V I:0.2428A P:51.914W PF:0.9338 Freq:50.01Hz Lamp Flux:6243.46x1 lm		
NAME: Compo 900 55W WW	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	64	53	47	63	53	47	62	52	47	41
0.80	74	63	57	73	63	57	71	62	56	50
1.00	82	72	66	81	72	65	79	73	65	59
1.25	88	79	73	87	79	73	85	77	72	65
1.50	93	84	78	91	84	78	89	82	77	70
2.00	99	92	86	97	90	85	94	88	84	77
2.50	102	95	90	100	94	89	96	91	87	80
3.00	105	99	94	103	98	93	99	95	91	83
4.00	108	103	99	106	102	98	102	98	95	87
5.00	110	106	103	108	104	101	103	100	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Mr.Ma
Test Date: 2023-08-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity: 65.0%
Test Distance: 6.100m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:229.02V I:0.2428A P:51.914W PF:0.9338 Freq:50.01Hz Lamp Flux:6243.46x1 lm		
NAME: Compo 900 55W WW	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:

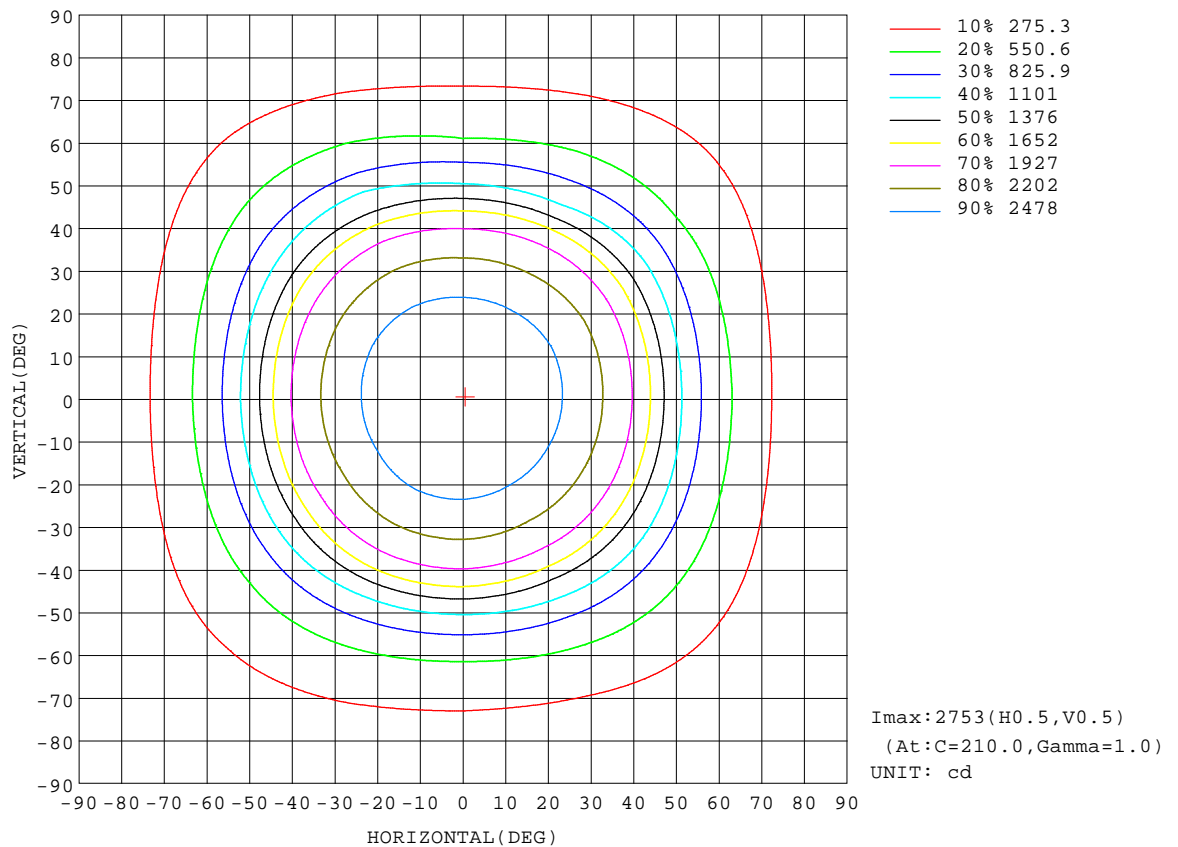


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Mr.Ma
Test Date: 2023-08-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity: 65.0%
Test Distance: 6.100m [K=1.0000]
Remarks:

AAI Figure

Test:U:229.02V I:0.2428A P:51.914W PF:0.9338 Freq:50.01Hz Lamp Flux:6243.46x1 lm		
NAME: Compo 900 55W WW	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:

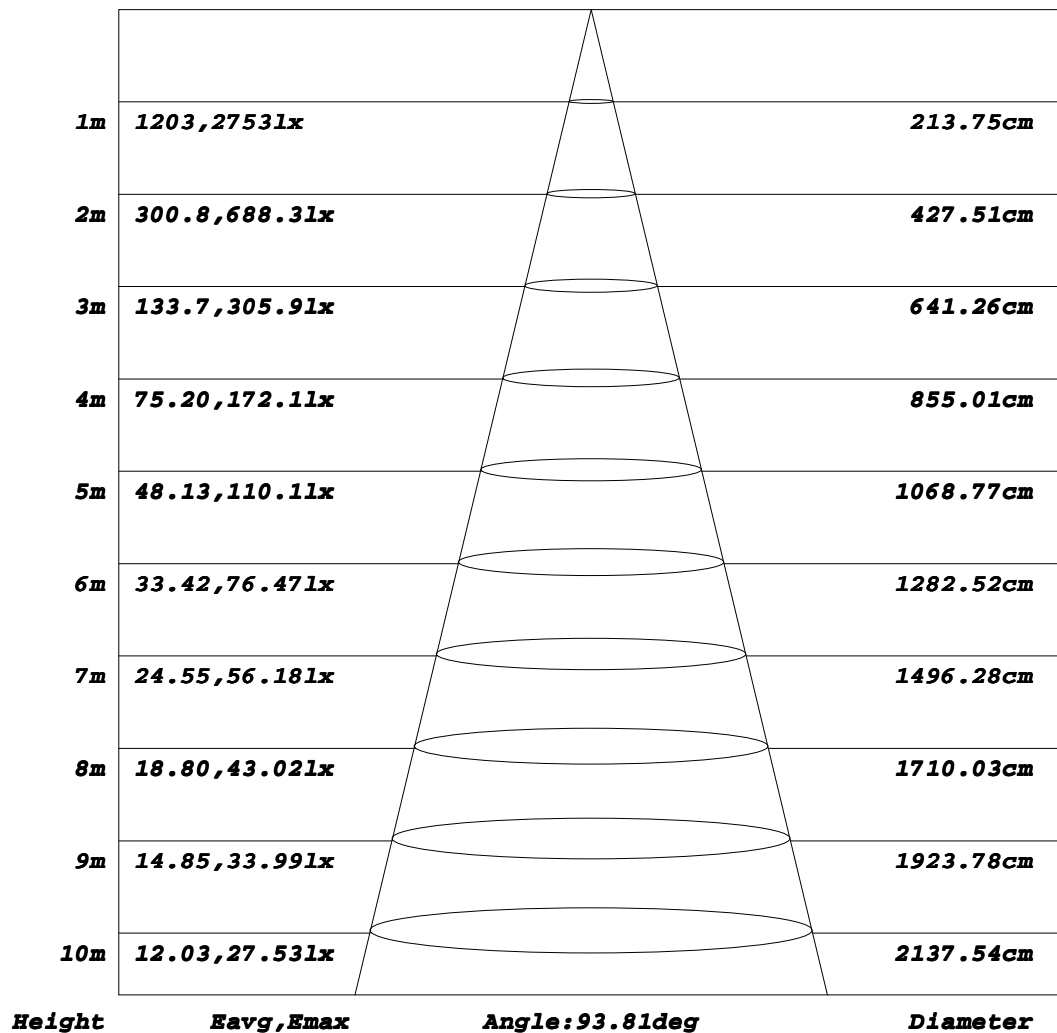Flux out:4347 lm


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Mr.Ma
Test Date: 2023-08-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity: 65.0%
Test Distance: 6.100m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:229.02V I:0.2428A P:51.914W PF:0.9338 Freq:50.01Hz Lamp Flux:6243.46x1 lm		
NAME: Compo 900 55W WW	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	1845
L_0~180(75)av	1464
L_0~180(85)av	1290
L_90~270(65)av	1722
L_90~270(75)av	1393
L_90~270(85)av	1266
L_45(65)av	1777
L_45(75)av	1435
L_45(85)av	1263

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3℃
Operators: Mr.Ma
Test Date: 2023-08-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity: 65.0%
Test Distance: 6.100m [K=1.0000]
Remarks:

Planar Illuminance Curve

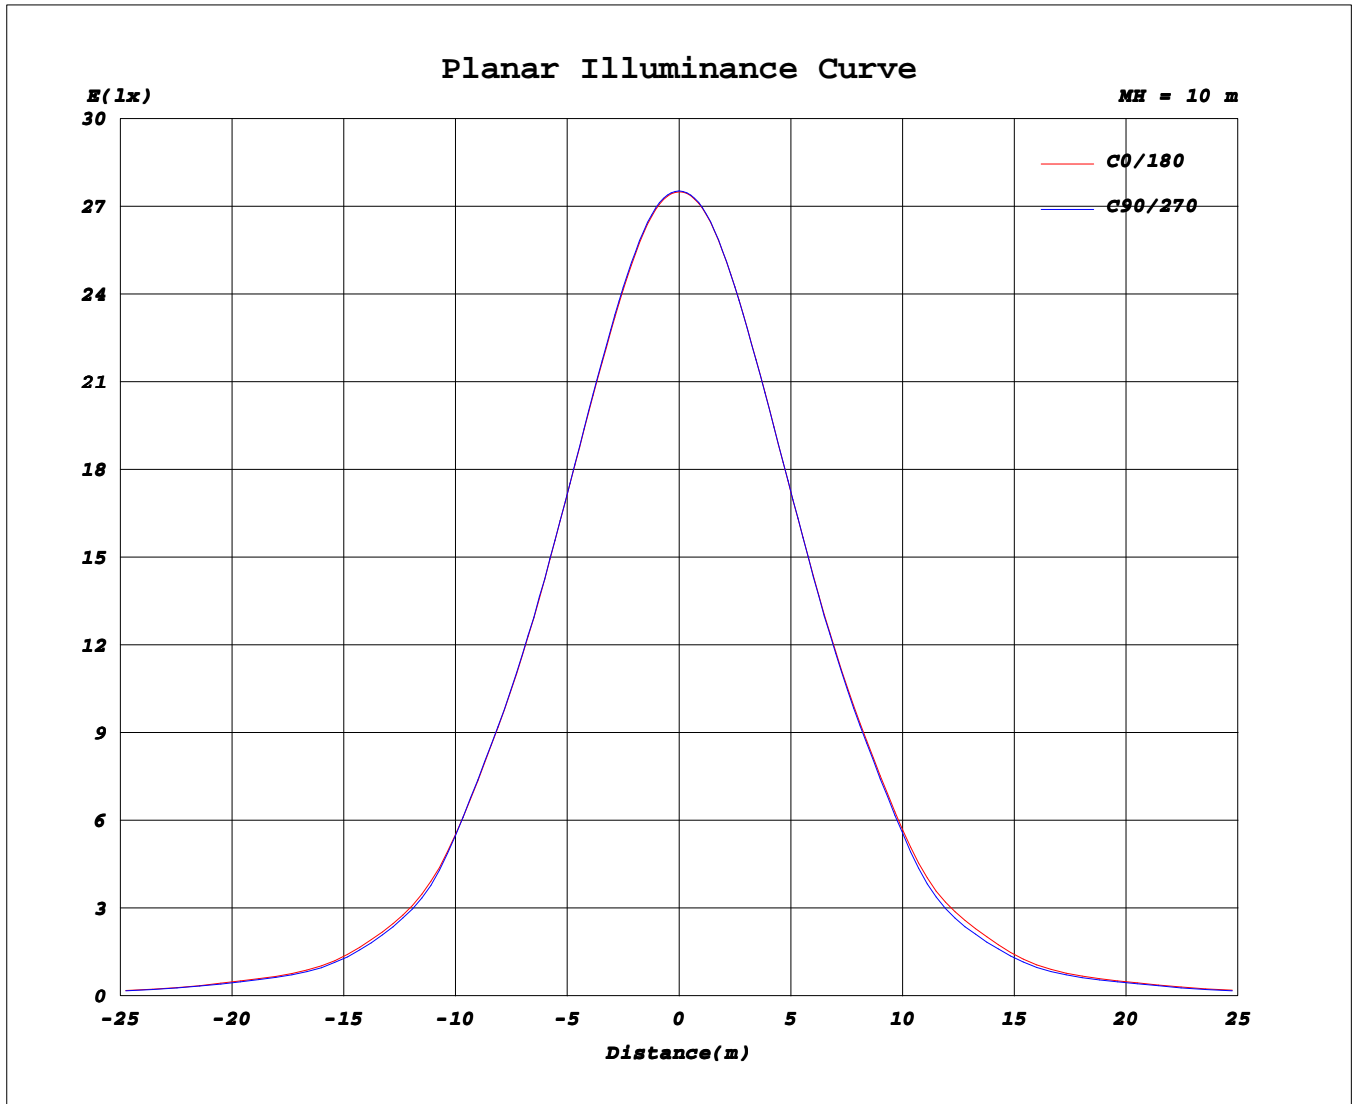

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Mr.Ma
Test Date: 2023-08-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity: 65.0%
Test Distance: 6.100m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:229.02V I:0.2428A P:51.914W PF:0.9338 Freq:50.01Hz Lamp Flux:6243.46x1 lm																	
NAME: Compo 900 55W WW									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.: PURATI PTY LTD									SUR.:						Shielding Angle:		

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2752	2752	2752	2752	2752	2752	2752	2752	2752	2752	2752	2752						
5	2741	2739	2738	2743	2743	2741	2744	2746	2747	2744	2743	2744						
10	2699	2694	2693	2704	2705	2701	2707	2711	2714	2706	2705	2707						
15	2631	2624	2624	2636	2640	2633	2642	2649	2651	2639	2637	2642						
20	2545	2536	2533	2550	2553	2546	2559	2568	2570	2554	2551	2556						
25	2440	2425	2424	2442	2447	2436	2452	2468	2467	2450	2443	2452						
30	2299	2280	2274	2302	2307	2294	2315	2334	2331	2312	2300	2318						
35	2120	2105	2097	2124	2130	2119	2145	2162	2166	2130	2128	2141						
40	1911	1892	1878	1913	1918	1906	1943	1961	1966	1922	1922	1932						
45	1562	1523	1487	1553	1565	1544	1609	1648	1635	1576	1547	1600						
50	1171	1161	1125	1123	1130	1158	1212	1224	1210	1127	1090	1182						
55	886	861	832	838	845	865	932	951	970	858	859	893						
60	617	596	592	579	598	597	627	650	628	582	582	598						
65	478	452	429	452	459	460	505	514	513	465	466	494						
70	307	308	307	309	309	310	331	324	333	301	306	304						
75	235	222	217	227	238	224	243	252	248	228	237	232						
80	152	140	131	152	153	148	161	171	167	155	150	160						
85	66.5	57.0	53.5	67.2	70.6	63.5	75.1	83.3	83.4	71.8	69.9	74.4						
90	0.89	0.87	0.87	0.82	0.91	0.85	1.55	4.16	6.13	1.08	1.02	1.40						
95	1.19	1.22	1.22	1.13	1.13	1.17	1.32	1.29	1.26	1.31	1.31	1.30						
100	1.62	1.64	1.63	1.53	1.52	1.58	1.70	1.67	1.63	1.69	1.68	1.67						
105	2.14	2.15	2.15	2.03	2.00	2.09	2.18	2.14	2.10	2.14	2.15	2.14						
110	2.72	2.72	2.74	2.58	2.56	2.67	2.71	2.69	2.65	2.70	2.68	2.69						
115	3.25	3.25	3.24	3.09	3.11	3.24	3.24	3.22	3.17	3.22	3.22	3.20						
120	3.65	3.65	3.62	3.52	3.56	3.69	3.64	3.63	3.60	3.65	3.65	3.61						
125	3.91	3.89	3.84	3.78	3.84	3.98	3.85	3.88	3.86	3.90	3.91	3.85						
130	4.05	3.98	3.93	3.91	3.98	4.11	3.88	3.99	3.98	4.01	4.02	3.97						
135	4.11	3.98	3.97	3.95	4.03	4.16	3.88	4.02	4.02	4.04	4.04	4.01						
140	4.14	3.98	3.98	3.97	4.07	4.20	3.88	4.04	4.05	4.07	4.07	4.03						
145	4.23	4.03	4.07	4.05	4.15	4.32	3.95	4.12	4.12	4.15	4.15	4.11						
150	4.35	4.15	4.18	4.26	4.32	4.46	4.09	4.27	4.27	4.30	4.32	4.27						
155	4.38	4.22	4.25	4.38	4.44	4.48	4.17	4.35	4.39	4.38	4.43	4.35						
160	4.42	4.24	4.32	4.47	4.49	4.46	4.22	4.41	4.47	4.44	4.49	4.43						
165	4.52	4.23	4.40	4.52	4.50	4.45	4.30	4.42	4.52	4.60	4.45	4.50						
170	4.54	4.26	4.47	4.56	4.50	4.47	4.44	4.63	4.76	4.66	4.45	4.53						
175	4.56	4.34	4.56	4.60	4.53	4.55	4.50	4.52	4.66	4.59	4.50	4.58						
180	4.57	4.44	4.60	4.62	4.56	4.62	4.57	4.45	4.60	4.62	4.56	4.62						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Mr.Ma
Test Date:2023-08-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.100m [K=1.0000]
Remarks: