


Installation Directions

1. Switch off mains power supply
2. Connect Dimmable Driver to mains voltage cable (L, N) Do not connect downlight to driver if driver is live. Inrush current from live driver will cause instant downlight failure. Do not switch secondary side.
3. Carefully install downlight into pre-cut 100mm hole.
4. Turn on mains power and switch on lighting circuit.


Approved Clearances

Note: 25mm for optimum product lifespan through effective heat dissipation.

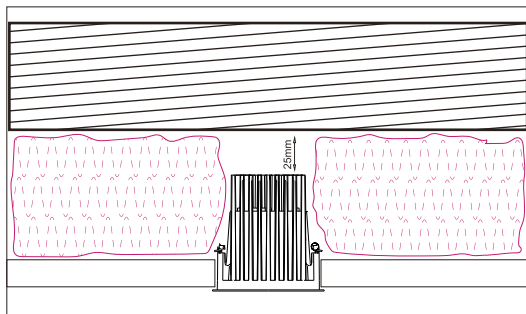

Example 1:

25mm Approved Height Clearance. Building elements cannot abutt rear of fitting.

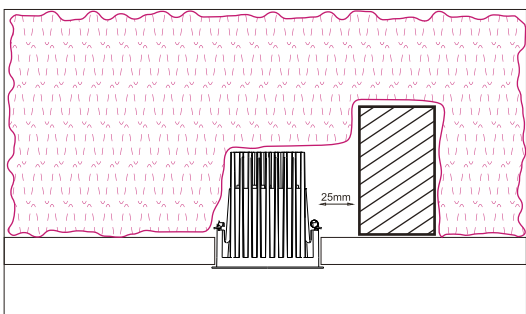

Example 2:

25mm Approved Side Clearance. Building elements cannot abutt side of fitting.

Driver is designed to be covered and abutted with IC / IC-F approved insulation.



Cutting of holes prior to receiving goods is entirely at the risk of the installer.