

PURATI.



VERSO



VERSO

Designed by npk design b.v.

Built for modern working and learning space

The Verso series by European design is an independent office luminaire offering outstanding efficiency and maximum visual comfort. It's a direct and indirect lighting. Available in a variety of mounting options: for pendant, ceiling/wall surface mounted.



The image displays two lighting diffuser options against a dark background. On the left is the 'Opal' diffuser, which is a smooth, white, rectangular panel with rounded corners. On the right is the 'Microprismatic' diffuser, which is a white, rectangular panel with a fine, grid-like texture and rounded corners. Both diffusers are shown from a perspective that highlights their depth and the way they would be installed in a lighting fixture.

Opal

Microprismatic

Two options for diffuser

General illumination brings harmonious brightness to any space.
UGR <19 version fit perfectly for office lighting use


Explore the essence of Verso series


The impressive design

Curved aluminium, rounded ends and slim trim design

Modern,

minimal look thanks to the Thin Design Concept

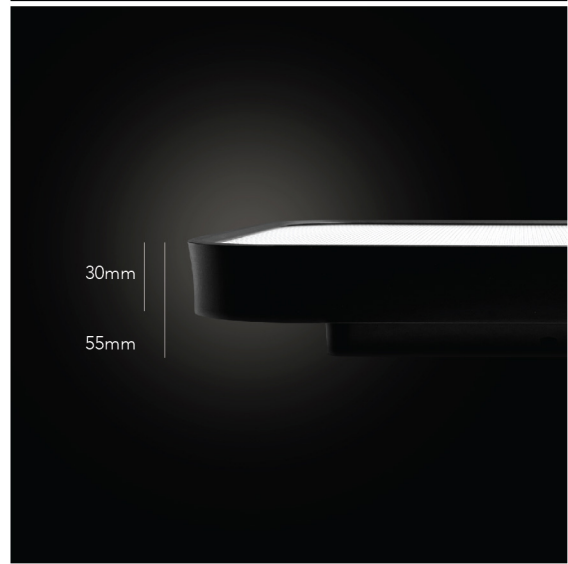

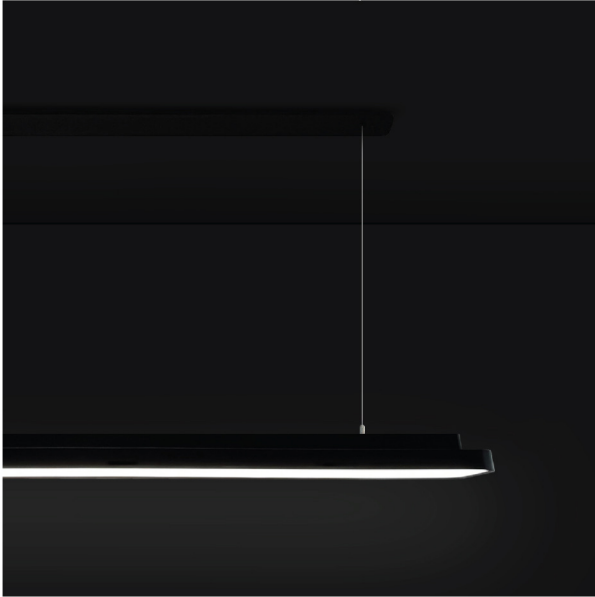

Surface mounted or suspension



Direct and indirect lighting



Versatile








Areas of application

Office
Education
Retail
Hospitality

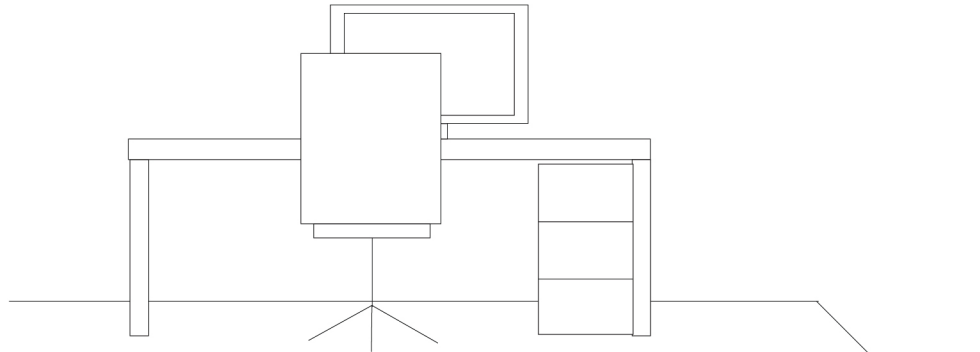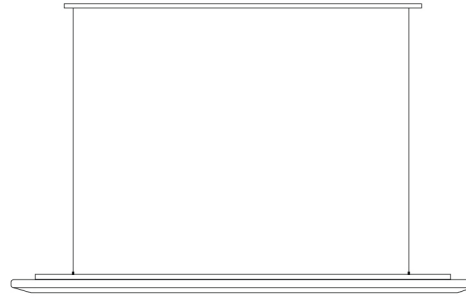

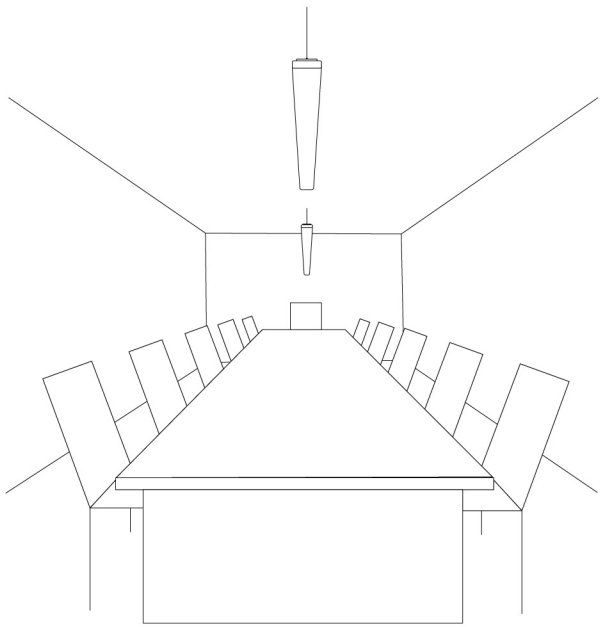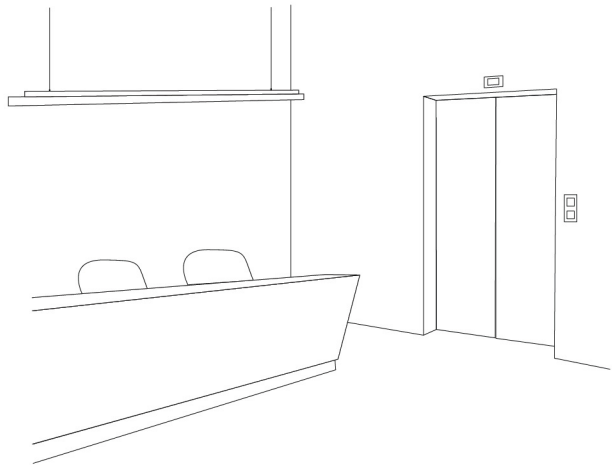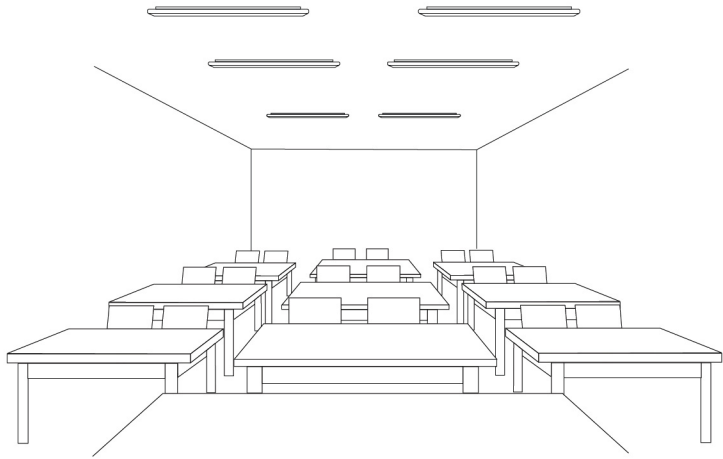

Technical data

	Size	Power	Lumens (at 3000k)	Beam Angle	Efficacy	Driver
① Verso 1200	1200mm	20/30/38W	2000/2900/3850lm	120°	100lm/W	Phase cut (Build-in), DALI (Build-in)
② Verso 1200 office	1200mm	20/30/38W	2000/2900/3850lm	90°	100lm/W	
③ Verso 1500	1500mm	30/40/50W	2850/3750/4650lm	120°	100lm/W	
④ Verso 1500 office	1500mm	30/40/50W	2850/3750/4650lm	90°	100lm/W	

General

Finishes	<input type="checkbox"/> Matt brushed black
	<input checked="" type="checkbox"/> Matt brushed silver
	<input type="checkbox"/> Matt painting white

Material Aluminum

IP Rating IP20

Lifespan L80/50,000h

Warranty 5 Years

LED

CCT 3000K/4000K

CRI >90

SDCM <3

UGR <19/<23

Electrical

Diffuser Opal
Micro-prismatic optional

Light distribution Direct only
Direct and indirect lighting optional



Mounting Surface mounted
Wire Suspension (2m)
Wall mounted

Function Motion detection (Corridor Function)
Emergency light (180 mins @ 4W)

1



2

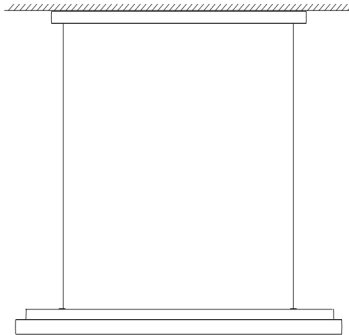
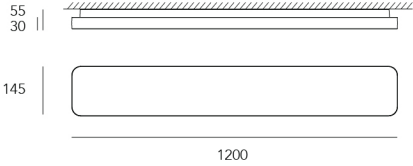


Wire suspension

3



4

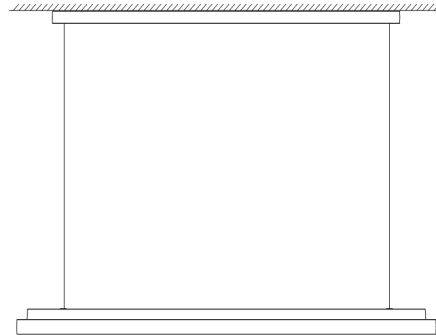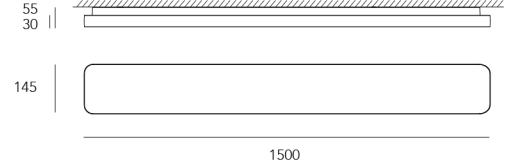

Wire suspension

Head Office

Unit 10, 80 O'Riordan Street,
Alexandria NSW 2015

Phone

+61 2 8065 8181

Email

sales@purati.com



www.purati.com