

PURATI.



POINT



# POINT TRACK

**Designed to provide visual comfort and minimal glare, offering flexibility for any lighting design.**

As part of the Point collection, the Point R track light with wide to focused beam angles come with 3 different sizes and is compatible with 2 circuit track. They can be used for presentation, in retail situations, office, hospitality, museums or living spaces.







# Explore the essence of Point Track series

## **Rotating Design**

Ceiling arm adjustable system allows 355° rotatable and 90° Tilttable

## **Great in Light Quality**

High colour rendering CRI>97 with low glare UGR<19, Point R Track Light works for flexible lighting for any project requirements.







A wide range  
of Baffle options



Deep design for visual comfort with magnetic anti-glare reflectors available in 4 different finishings perfect for any interiors.

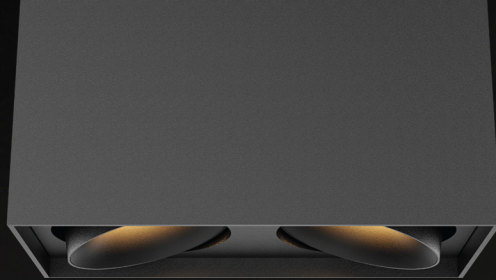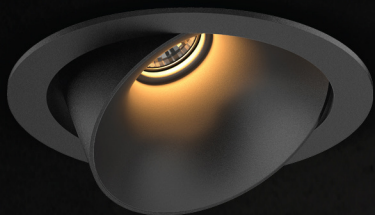




# POINT

## **The dark light concept downlight collection**

The Point collection is a classic and deep recessed downlight, designed for maximum visual comfort. This range is available in a wide variety of models, sizes, power and mounting options. Additionally, offering a wide range of baffle options, making it suitable for any interiors.





## Multiple colour temperature options

3000K CRI>97 as standard

2700K CRI>97 or 4000K CRI>97 as request

2700K-6500K (tunable white) as request



# Explore the essence of Point series

## Low-glare design

It creates a visual comfort with  $UGR < 19$ , meeting all your daily lighting requirements.

## Flexibility


Magnetic reflector design not only makes the Point Family stranger and more flexible, but also it can be easily and simply to change different reflectors after installation.

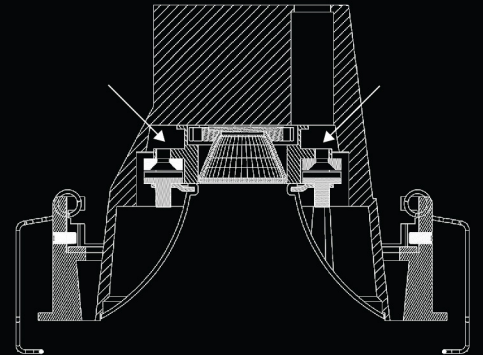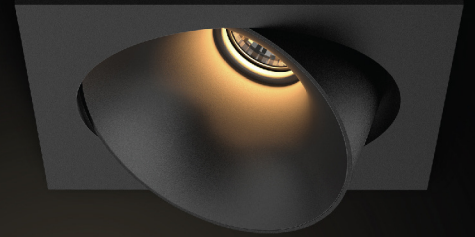



Finish options







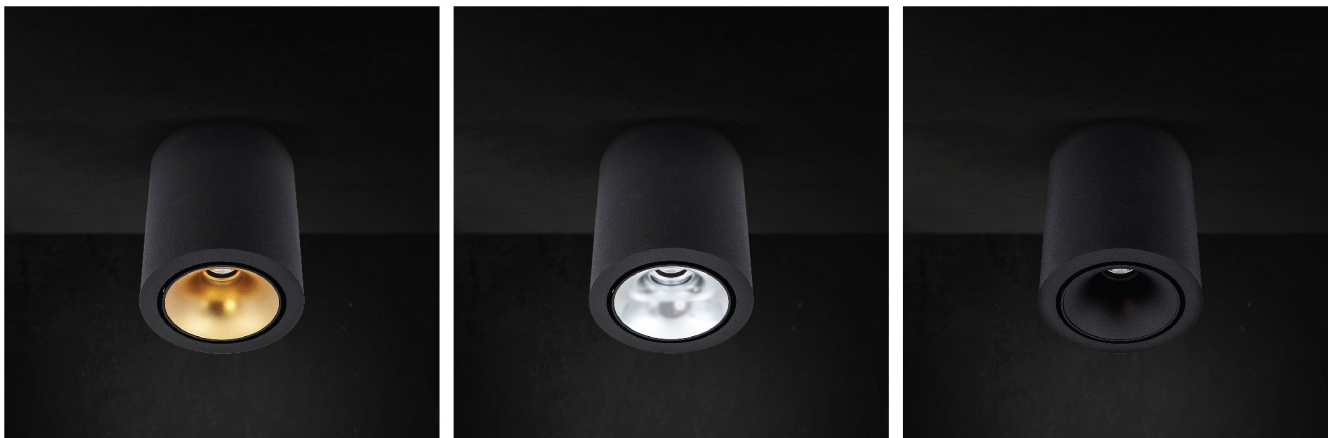


Available in 2 trim finishes: textured black, textured white.  
Can be fitted with any of the 5 baffle finishes: textured white, textured black, textured gold, textured glossy black, textured silver

# Areas of application

Retail  
Office  
Residential  
Hospitality  
Education

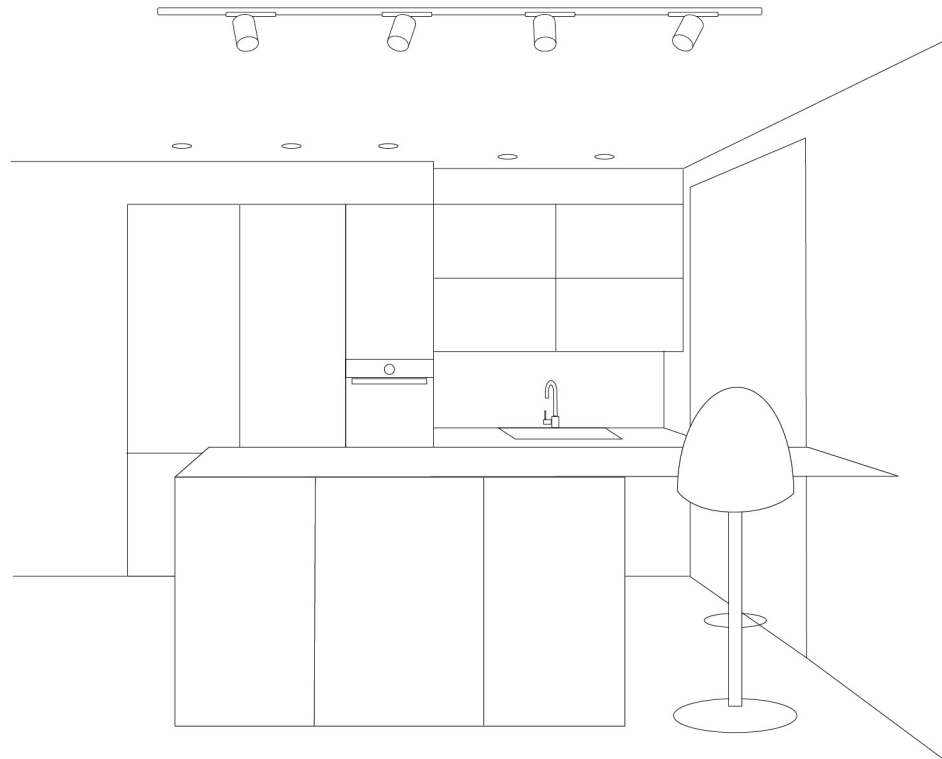

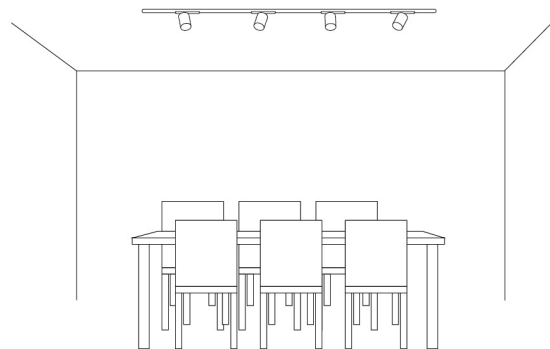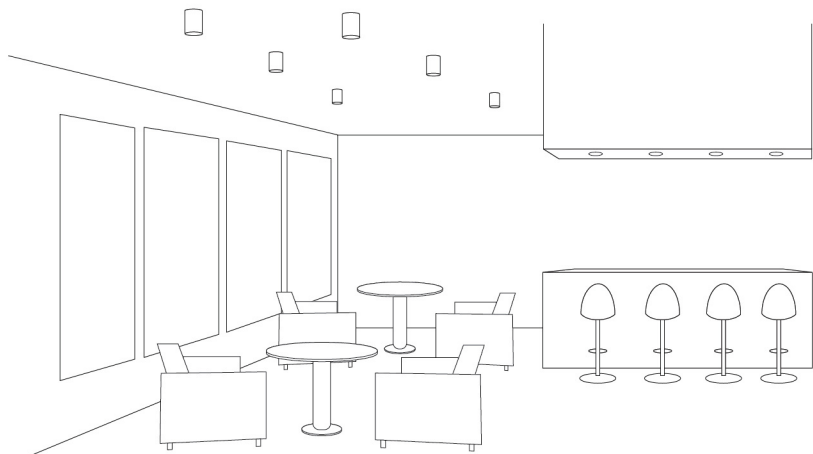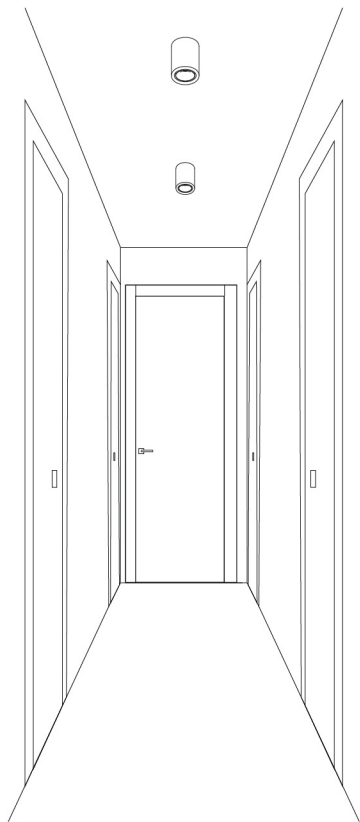

# Technical data




	Size	Power	Lumens	Beam Angle	Efficacy	Driver
① Point R track light S	60mm	10W	840lm	24°/40°/60°	up to 85lm/W	Phase cut (Build-in), DALI (Build-in)
② Point R track light M	75mm	20W	1620lm	24°/40°/60°	up to 85lm/W	
③ Point R track light L	93mm	36W	2850lm	24°/40°/60°	up to 85lm/W	

General	
Finishes	<input type="checkbox"/> White
	<input checked="" type="checkbox"/> Black
Baffle finishes	<input type="checkbox"/> White
	<input checked="" type="checkbox"/> Black
	<input type="checkbox"/> Silver
	<input type="checkbox"/> Gold
Material	Aluminium
IP Rating	IP20
Lifespan	L90/50,000h
Warranty	5 Years

LED	
CCT	2000K/3000K/4000K
CRI	>97
SDCM	<3
UGR	<19

Electrical	
Mounting	Track mounted
Function	Casambi





# Technical data


	Size	Power	Lumens	Beam Angle	Driver
① Point R fixed S surface mounted	100mm	10W	850lm	24°/40°/60°	Phase cut (Build-in), DALI (Build-in)
② Point R adjustable S surface mounted	87mm	10W	85lm	24°/40°/60°	
③ Point R adjustable M surface mounted	106mm	15W	1200lm	24°/40°/60°	
④ Point S double adjustable surface mounted	170mm	10W	740lm	24°/40°/60°	

General	
Finishes	<input type="checkbox"/> White
	<input checked="" type="checkbox"/> Black
Baffle finishes	<input type="checkbox"/> White
	<input checked="" type="checkbox"/> Black
	<input checked="" type="checkbox"/> High Gloss Black
	<input type="checkbox"/> Silver
	<input type="checkbox"/> Gold
Material	Aluminium
IP Rating	IP20
Lifespan	L90/50,000h
Warranty	5 Years


LED	
CCT	2000K/3000K/4000K
CRI	>97
SDCM	<3
UGR	<19

Electrical	
Mounting	Track mounted
Function	Casambi


1




2



3



4



# Technical data

		Size	Power	Lumens	Beam Angle	Driver
1	Point R fixed S ceiling recessed	66mm	10W	760lm	24°/40°/60°	Phase cut (Build-in), DALI (Build-in)
2	Point R fixed M ceiling recessed	83mm	15W	1065lm	24°/40°/60°	
3	Point R fixed L ceiling recessed	106mm	25W	1480lm	24°/40°/60°	
4	Point R fixed XL ceiling recessed	157mm	28W	2640lm	24°/40°/60°	
5	Point R adjustable S ceiling recessed	86mm	10W	850lm	24°/40°/60°	
6	Point R adjustable M ceiling recessed	105mm	15W	1200lm	24°/40°/60°	
7	Point R adjustable L ceiling recessed	135mm	20W	2000lm	24°/40°/60°	
8	Point R trimless fixed ceiling recessed	60mm	10W	740lm	24°/40°/60°	
9	Point R trimless adjustable S ceiling recessed	78mm	10W	740lm	24°/40°/60°	
10	Point S trimless adjustable ceiling recessed	78mm	10W	740lm	24°/40°/60°	
11	Point S fixed S ceiling recessed	65mm	10W	685lm	24°/40°/60°	
12	Point S fixed M ceiling recessed	85mm	15W	1090lm	24°/40°/60°	
13	Point S adjustable S ceiling recessed	86mm	10W	740lm	24°/40°/60°	
14	Point S adjustable M ceiling recessed	105mm	15W	1000lm	24°/40°/60°	
15	Point S Double adjustable S ceiling recessed	170mm	10W	740lm	24°/40°/60°	
16	Point S Double adjustable M ceiling recessed	215mm	15W	1000lm	24°/40°/60°	

<b>General</b>	
Finishes	<input type="checkbox"/> White
	<input checked="" type="checkbox"/> Black
Baffle finishes	<input type="checkbox"/> White
	<input checked="" type="checkbox"/> Black
	<input checked="" type="checkbox"/> High Gloss Black
	<input type="checkbox"/> Silver
	<input type="checkbox"/> Gold
Material	Aluminium
IP Rating	IP20~IP44
Lifespan	L90/50,000h
Warranty	5 Years
<b>LED</b>	
CCT	2000K/3000K/4000K
CRI	>97
SDCM	<3
UGR	<19
<b>Electrical</b>	
Mounting	Ceiling recessed
Function	Casambi

1



Ø 60

72

Ø 66

2



Ø 76

85

Ø 83

3



Ø 100

110

Ø 106

4




Ø 150


106

Ø 157


5




7




9




6



8




10







11




13




15




12



14



16



**Head Office**

Unit 10, 80 O'Riordan Street,  
Alexandria NSW 2015

**Phone**

+61 2 8065 8181

**Email**

[sales@purati.com](mailto:sales@purati.com)



[www.purati.com](http://www.purati.com)