

PURATI.



POINT

PURATI

Design

---

n p k | design

PURATI.

Production

---

The close collaboration between  
Purati and npk design. Together,  
our mission is to create the  
great products & bring new  
lighting solutions for architecture.





## npk design b.v.

Our designs are made by npk design b.v. is an award-winning design agency which has developed a wide range of successfully products for us more than 10 years.

From Slice series to Fusi series, has been gaining prestigious international design awards such as IF Design Award, Red Dot Award, German Design Award.





# Purati

Performance, Uniqueness, Responsibility,  
Aesthetics, Technology, Innovation (PURATI).  
Those are our core value and foundation.

Our lights save space, save resources, and  
offer greater quality.

We offer architectural lighting of premium  
quality and performance and with unique  
design.





**npk design**  
Leiden,  
The Netherlands



**PURATI**

**Purati**  
Manufacturing Plant  
Ningbo, China

**PURATI**

**Purati HQ**  
Sydney, Australia



# POINT TRACK

**Designed to provide visual comfort and minimal glare, offering flexibility for any lighting design.**

As part of the Point collection, the Point R track light with wide to focused beam angles come with 3 different sizes and is compatible with 3 circuit track. They can be used for presentation, in retail situations, office, hospitality, museums or living spaces.





# Explore the essence of Point Track series

## **Rotating Design**

Ceiling arm adjustable system allows 355° rotatable and 90° Tilttable

## **Great in Light Quality**

High colour rendering CRI>97 with low glare UGR<19, Point R Track Light works for flexible lighting for any project requirements.







A wide range  
of Baffle options



Deep design for visual comfort with magnetic anti-glare reflectors available in 4 different finishings perfect for any interiors.

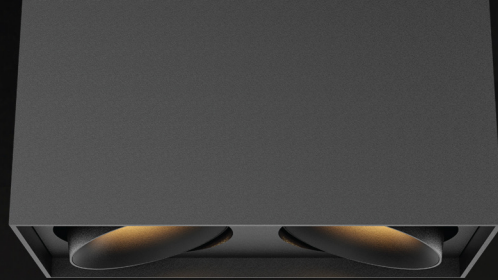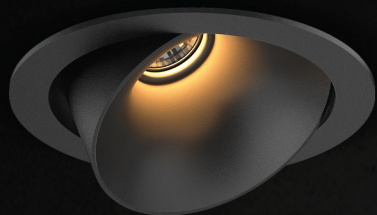

# POINT

## **The dark light concept downlight collection**

The Point collection is a classic and deep recessed downlight, designed for maximum visual comfort. This range is available in a wide variety of models, sizes, power and mounting options. Additionally, offering a wide range of baffle options, making it suitable for any interiors.





## Multiple colour temperature options

3000K CRI>97 as standard

2700K CRI>97 or 4000K CRI>97 as request

2700K-6500K (tunable white) as request



# Explore the essence of Point series

## Low-glare design

It creates a visual comfort with  $UGR < 19$ , meeting all your daily lighting requirements.


## Flexibility

Magnetic reflector design not only makes the Point Family stranger and more flexible, but also it can be easily and simply to change different reflectors after installation.

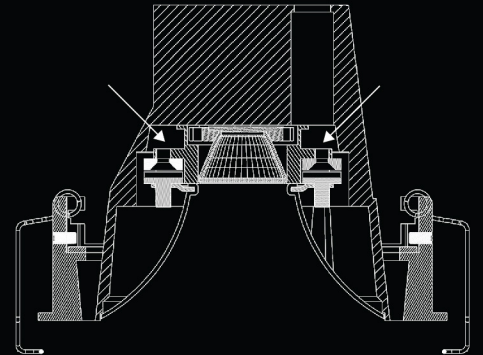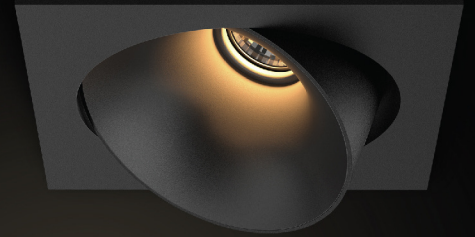





Finish options



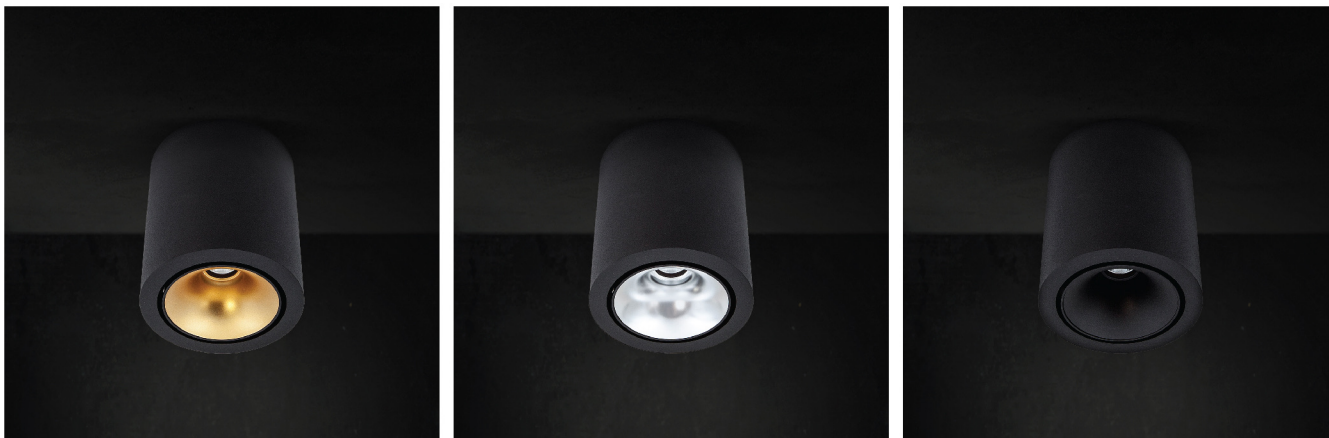


Available in 2 trim finishes: textured black, textured white.  
Can be fitted with any of the 5 baffle finishes: textured white,  
textured black, textured gold, textured glossy black, textured silver

# Areas of application

Retail  
Office  
Residential  
Hospitality  
Education

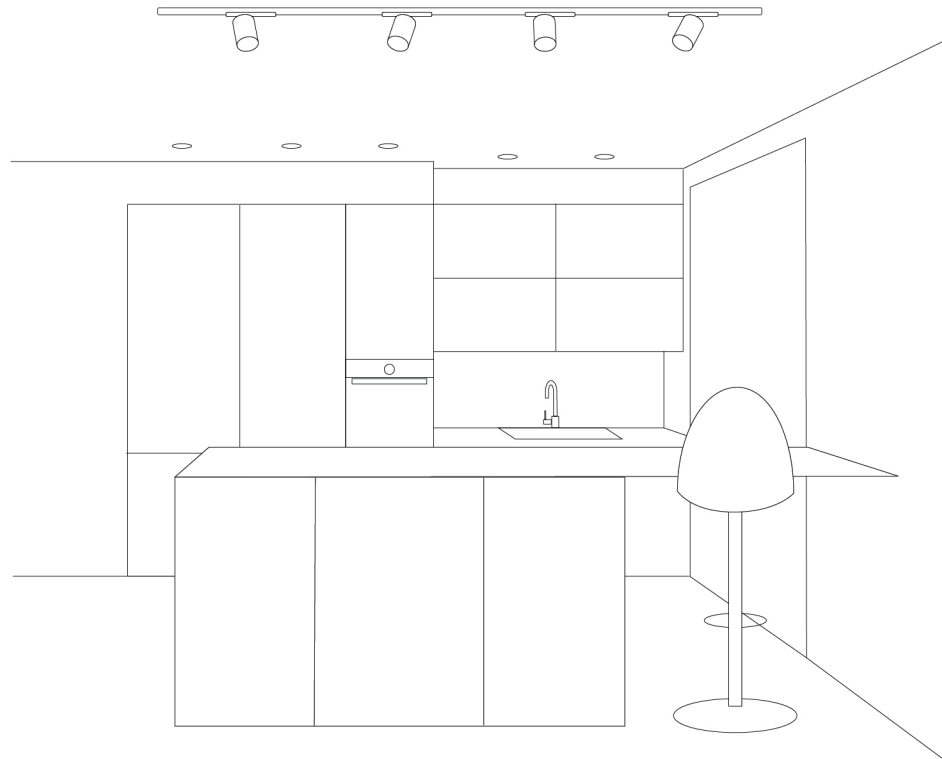

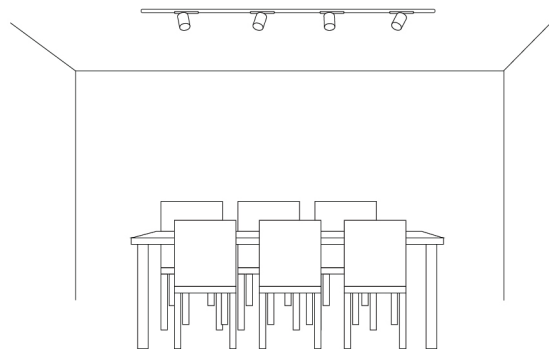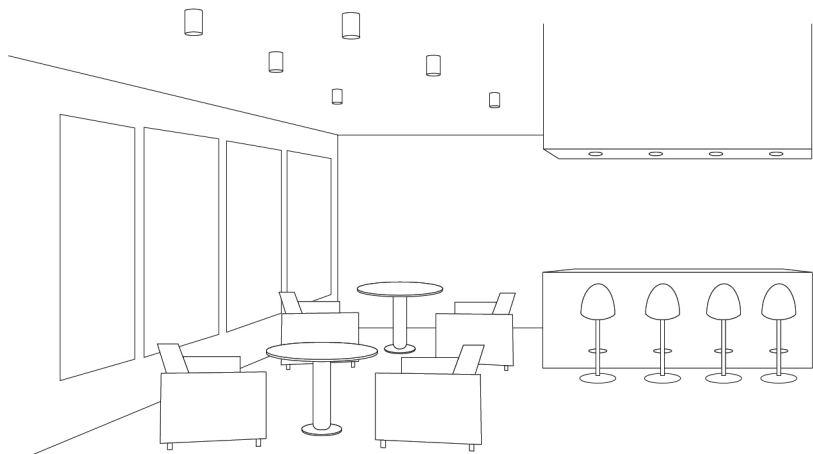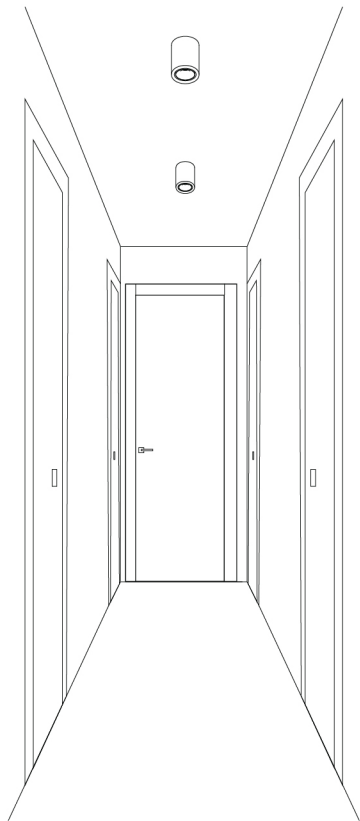




# Technical data

|                         | Size | Power | Lumens | Beam Angle  | Efficacy     | Driver                                   |
|-------------------------|------|-------|--------|-------------|--------------|------------------------------------------|
| ① Point R track light S | 60mm | 10W   | 840lm  | 24°/40°/60° | up to 85lm/W | Phase cut (Build-in),<br>DALI (Build-in) |
| ② Point R track light M | 75mm | 20W   | 1620lm | 24°/40°/60° | up to 85lm/W |                                          |
| ③ Point R track light L | 93mm | 36W   | 2850lm | 24°/40°/60° | up to 85lm/W |                                          |

| General         |                                           |
|-----------------|-------------------------------------------|
| Finishes        | <input type="checkbox"/> White            |
|                 | <input checked="" type="checkbox"/> Black |
| Baffle finishes | <input type="checkbox"/> White            |
|                 | <input checked="" type="checkbox"/> Black |
|                 | <input type="checkbox"/> Silver           |
|                 | <input type="checkbox"/> Gold             |
| Material        | Aluminium                                 |
| IP Rating       | IP20                                      |
| Lifespan        | L90/50,000h                               |
| Warranty        | 5 Years                                   |

| LED  |                   |
|------|-------------------|
| CCT  | 2000K/3000K/4000K |
| CRI  | >97               |
| SDCM | <3                |
| UGR  | <19               |

| Electrical |               |
|------------|---------------|
| Mounting   | Track mounted |
| Function   | Casambi       |



# Technical data


|                                             | Size  | Power | Lumens | Beam Angle  | Driver                                   |
|---------------------------------------------|-------|-------|--------|-------------|------------------------------------------|
| ❶ Point R fixed S surface mounted           | 100mm | 10W   | 850lm  | 24°/40°/60° | Phase cut (Build-in),<br>DALI (Build-in) |
| ❷ Point R adjustable S surface mounted      | 87mm  | 10W   | 85lm   | 24°/40°/60° |                                          |
| ❸ Point R adjustable M surface mounted      | 106mm | 15W   | 1200lm | 24°/40°/60° |                                          |
| ❹ Point S double adjustable surface mounted | 170mm | 10W   | 740lm  | 24°/40°/60° |                                          |

| General         |                                                      |
|-----------------|------------------------------------------------------|
| Finishes        | <input type="checkbox"/> White                       |
|                 | <input checked="" type="checkbox"/> Black            |
| Baffle finishes | <input type="checkbox"/> White                       |
|                 | <input checked="" type="checkbox"/> Black            |
|                 | <input checked="" type="checkbox"/> High Gloss Black |
|                 | <input type="checkbox"/> Silver                      |
|                 | <input type="checkbox"/> Gold                        |
| Material        | Aluminium                                            |
| IP Rating       | IP20                                                 |
| Lifespan        | L90/50,000h                                          |
| Warranty        | 5 Years                                              |


| LED  |                   |
|------|-------------------|
| CCT  | 2000K/3000K/4000K |
| CRI  | >97               |
| SDCM | <3                |
| UGR  | <19               |

| Electrical |               |
|------------|---------------|
| Mounting   | Track mounted |
| Function   | Casambi       |


1




2



3



4



# Technical data

|   |                                                | Size  | Power | Lumens | Beam Angle  | Driver                                   |
|---|------------------------------------------------|-------|-------|--------|-------------|------------------------------------------|
| ❶ | Point R fixed S ceiling recessed               | 66mm  | 10W   | 760lm  | 24°/40°/60° | Phase cut (Build-in),<br>DALI (Build-in) |
| ❷ | Point R fixed M ceiling recessed               | 83mm  | 15W   | 1065lm | 24°/40°/60° |                                          |
| ❸ | Point R fixed L ceiling recessed               | 106mm | 25W   | 1480lm | 24°/40°/60° |                                          |
| ❹ | Point R fixed XL ceiling recessed              | 157mm | 28W   | 2640lm | 24°/40°/60° |                                          |
| ❺ | Point R adjustable S ceiling recessed          | 86mm  | 10W   | 850lm  | 24°/40°/60° |                                          |
| ❻ | Point R adjustable M ceiling recessed          | 105mm | 15W   | 1200lm | 24°/40°/60° |                                          |
| ❼ | Point R adjustable L ceiling recessed          | 135mm | 20W   | 2000lm | 24°/40°/60° |                                          |
| ❽ | Point R trimless fixed ceiling recessed        | 60mm  | 10W   | 740lm  | 24°/40°/60° |                                          |
| ❾ | Point R trimless adjustable S ceiling recessed | 78mm  | 10W   | 740lm  | 24°/40°/60° |                                          |
| ❿ | Point S trimless adjustable ceiling recessed   | 78mm  | 10W   | 740lm  | 24°/40°/60° |                                          |
| ⓫ | Point S fixed S ceiling recessed               | 65mm  | 10W   | 685lm  | 24°/40°/60° |                                          |
| ⓫ | Point S fixed M ceiling recessed               | 85mm  | 15W   | 1090lm | 24°/40°/60° |                                          |
| ⓫ | Point S adjustable S ceiling recessed          | 86mm  | 10W   | 740lm  | 24°/40°/60° |                                          |
| ⓫ | Point S adjustable M ceiling recessed          | 105mm | 15W   | 1000lm | 24°/40°/60° |                                          |
| ⓫ | Point S Double adjustable S ceiling recessed   | 170mm | 10W   | 740lm  | 24°/40°/60° |                                          |
| ⓫ | Point S Double adjustable M ceiling recessed   | 215mm | 15W   | 1000lm | 24°/40°/60° |                                          |

## General

Finishes ☐ White  
☒ Black

Baffle finishes ☐ White  
☒ Black  
☒ High Gloss Black  
☐ Silver  
☐ Gold

Material Aluminium  
IP Rating IP20~IP44  
Lifespan L90/50,000h  
Warranty 5 Years

## LED

CCT 2000K/3000K/4000K  
CRI >97  
SDCM <3  
UGR <19

## Electrical

Mounting Ceiling recessed  
Function Casambi

1



Ø 60

72

Ø 66

2



Ø 76

85

Ø 83

3



Ø 100

110

Ø 106

4




Ø 150


106

Ø 157


5




7




9




6




8




10




11




13




15




12



14



16



**Head Office**

Unit 10, 80 O'Riordan Street,  
Alexandria NSW 2015

**Phone**

+61 2 8065 8181

**Email**

[sales@purati.com](mailto:sales@purati.com)



[www.purati.com](http://www.purati.com)