

PURATI®

PURATI

Design

n p k | design

PURATI.

Production

The close collaboration between
Purati and npk design. Together,
our mission is to create the
great products & bring new
lighting solutions for architecture.





npk design b.v.

Our designs are made by npk design b.v. is an award-winning design agency which has developed a wide range of successfully products for us more than 10 years.

From Slice series to Fusi series, has been gaining prestigious international design awards such as IF Design Award, Red Dot Award, German Design Award.





Purati

Performance, Uniqueness, Responsibility,
Aesthetics, Technology, Innovation (PURATI).
Those are our core value and foundation.

Our lights save space, save resources, and
offer greater quality.

We offer architectural lighting of premium
quality and performance and with unique
design.





npk design
Leiden,
The Netherlands



PURATI

Purati
Manufacturing Plant
Ningbo, China


PURATI

Purati HQ
Sydney, Australia

PURATI.



COMPO

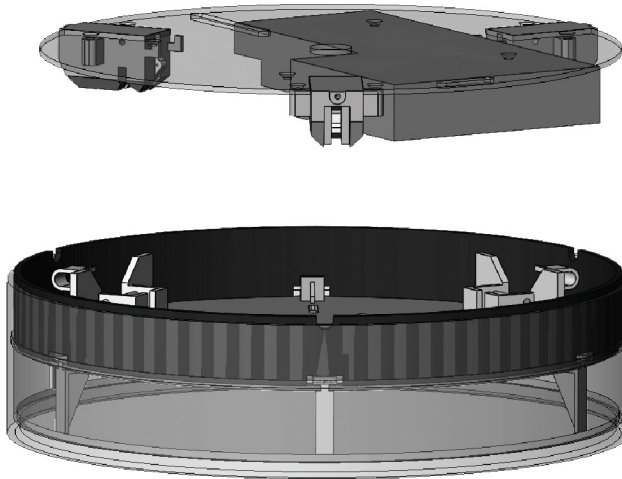


COMPO

Designed by npk design b.v.

Minimalist design with perfect light uniformity for an open feeling of space. This series is a very classic cylindrical design in various sizes and mounting options that integrates elegantly into any architecture.



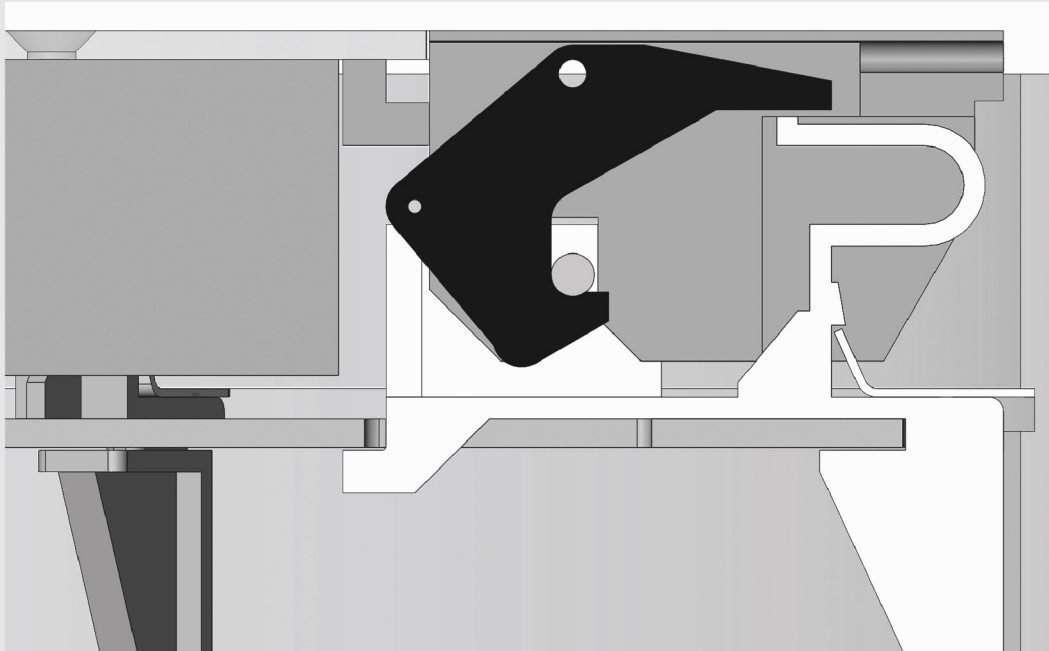

The initial design



**Innovative design
(all in one base)**

Direct/indirect light distribution,
ambient light distribution.
(Indirect light can be switched
on/off button on the luminaire base)


Explore the essence of Compo series

Ambient light

Perfect light uniformity with zero dotting,
high efficiency and perfect glare control
thanks to prismatic diffuser.

European design

Slim Trim Design, impressed with simplicity
and elegance.

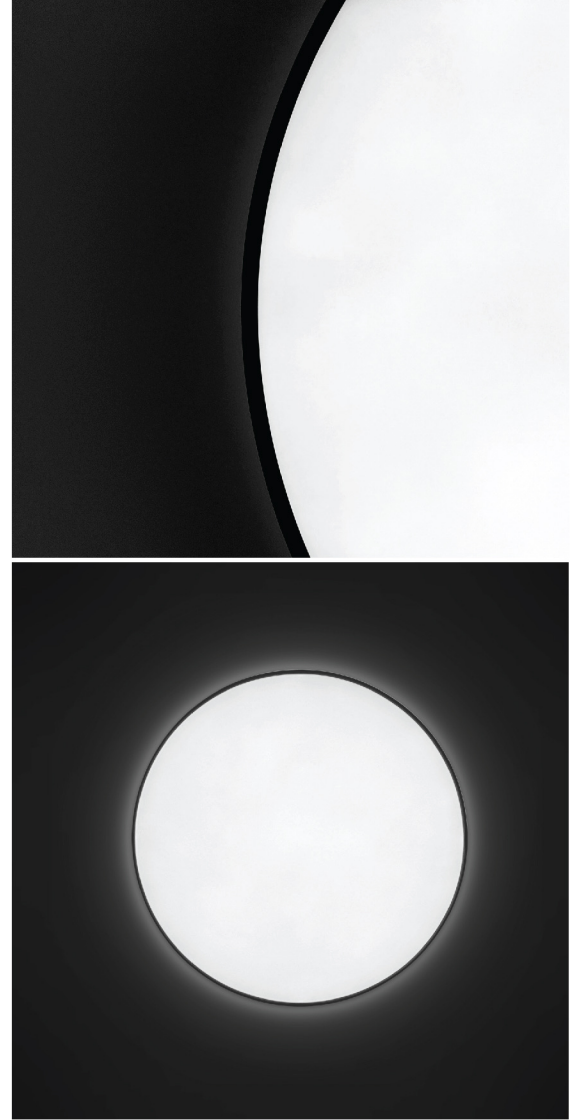



Simply
everywhere

A very classic cylindrical design in various sizes and mounting options that integrated elegantly into any architecture.


Tuneable white version





TW only for Compo 450
direct version, the CCT
change between warm
white and cool white light
via DALI DT8.



Areas of application

Office
Education
Retail
Hospitality
Public space

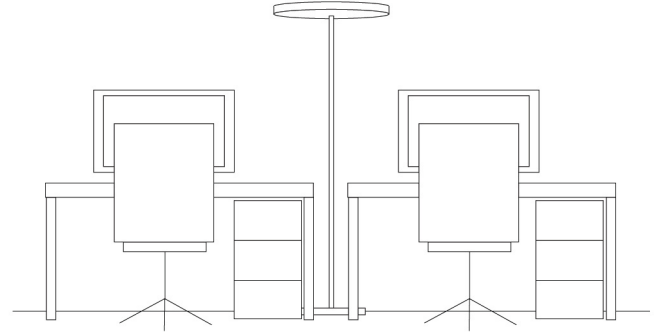

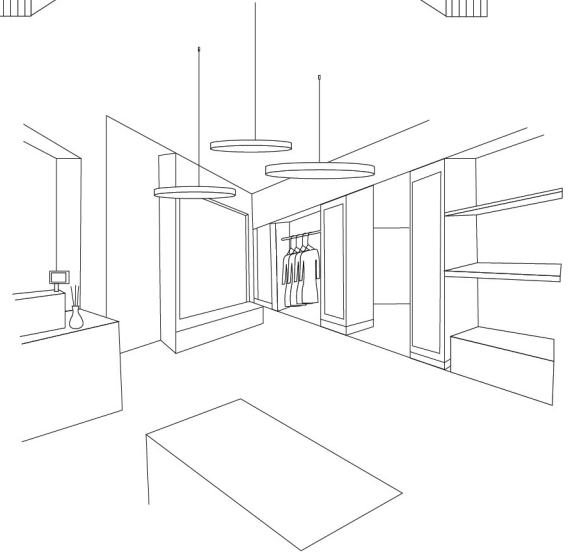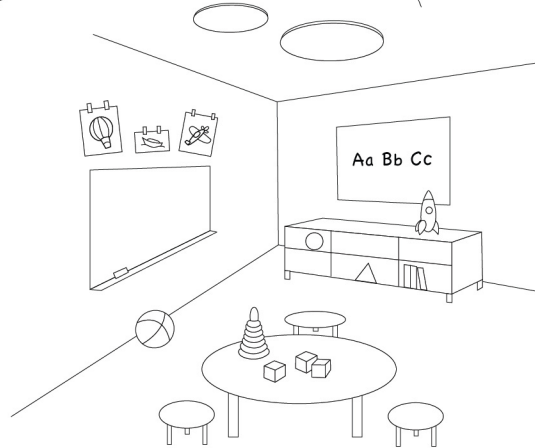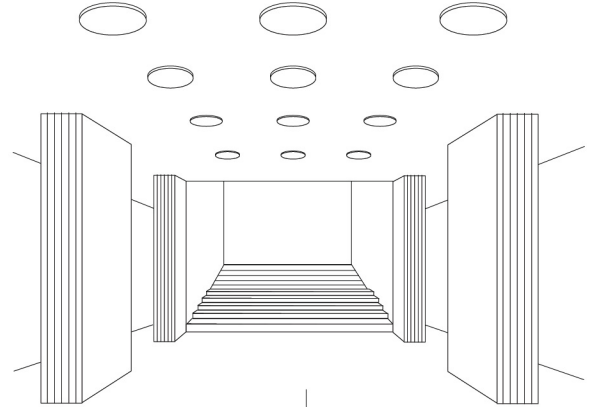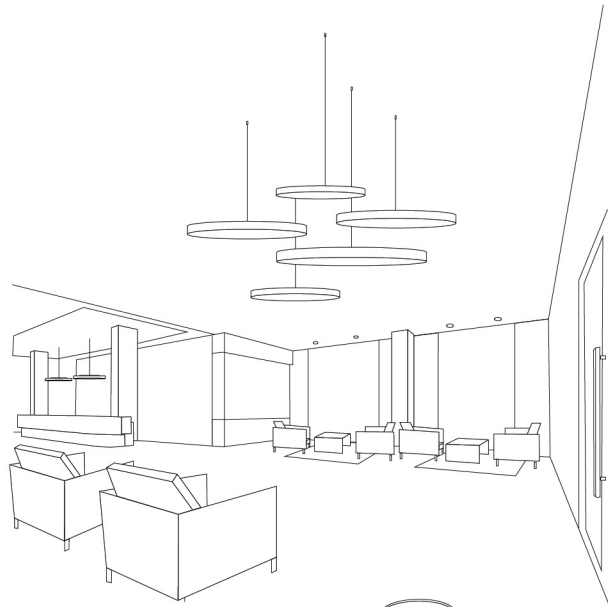






Technical data

	Size	Power	Lumens (at 3000k)	Beam Angle	Efficacy	Driver
❶ Compo 320	320mm	24/18/10W	2400/1800lm	120°	100lm/W	Non-DIM (Build-in), Phase cut (Build-in), DALI (Build-in), Bluetooth (Remote)
❷ Compo 450	450mm	30/22W	3100/2300lm	120°	100lm/W	
❸ Compo 600	600mm	55/38W	5500/4000lm	120°	100lm/W	
❹ Compo 900	900mm	90/70/55W	9000/7000/5500lm	120°	100lm/W	

General

Finishes	 White
	 Black
	 Brushed Silver
	 Brushed Brass
	 Brushed Gold

Material	Aluminium
----------	-----------

IP Rating	IP20
-----------	------

IK Rating	IK08
-----------	------

Lifespan	L80/50,000h
----------	-------------

Warranty	5 Years
----------	---------

LED

CCT	3000K/4000K Switch
-----	--------------------

CRI	>90
-----	-----

SDCM	<3
------	----

UGR	<19 or <23 (X=4H, Y=8H)
-----	-------------------------

Electrical

Diffuser	Opal
	Micro-prismatic optional

Light distribution	Direct only
	Direct and indirect lighting optional

Mounting	Surface mounted
	Rod Suspension (1m)
	Wire Suspension (2m)
	Wall mounted


Function	PIR sensor
	Emergency (2W 90mins/180mins Lithium cell)
	Sensor + Emergency

1





Ø 320

2





Ø 450

3




Ø 600


4




Ø 900




Rod
suspension



Parallel
wire suspension



Central
wire suspension
320/450



Central
wire suspension
600/900

PURATI.



FLOAT



FLOAT

An integrated interior luminaire offering floating, timeless elegance and 360° perfect illumination.

With a minimalist design and versatile application such as ceiling and wall mounting as well as perfectly suspended with a wire or rod, combine with the handmade frosted acrylic diffuser with high quality Seoul LEDS (up to 135lm/W) and multiple functions, making it ideal for office, education, retail, hospitality and public spaces.





Material and workmanship

Used in the handmade
frosted acrylic diffuser
to create outstanding
efficient light (135lm/W)

Explore the essence of Float series

Quality is all around

Offering floating elegance, the 360° wide-angle luminaire body design makes extremely homogenous omnidirectional illumination

Ease of installation

Swivel-locking makes it easy installation









Simply
everywhere




A very classic cylindrical design in various sizes and mounting options that integrated elegantly into any architecture.

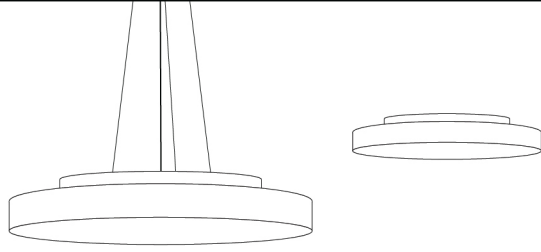

Areas of application

Office
Education
Residential
Hospitality

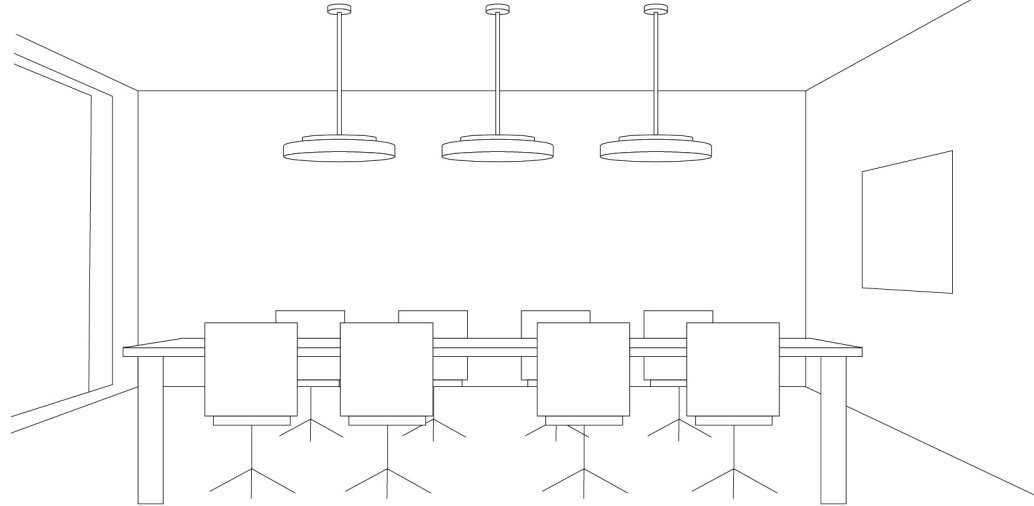

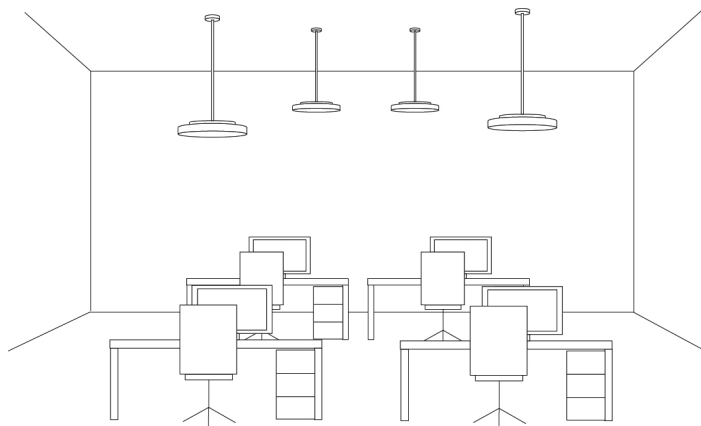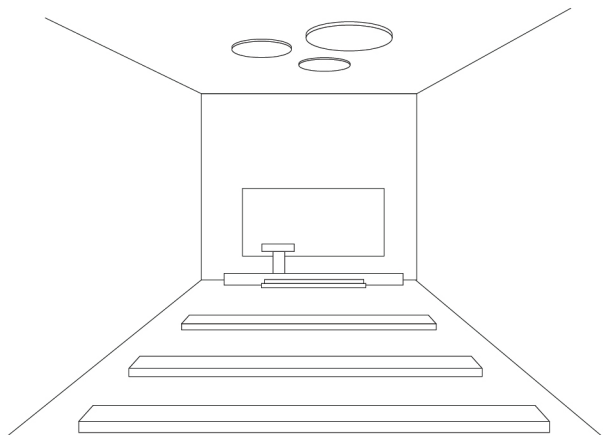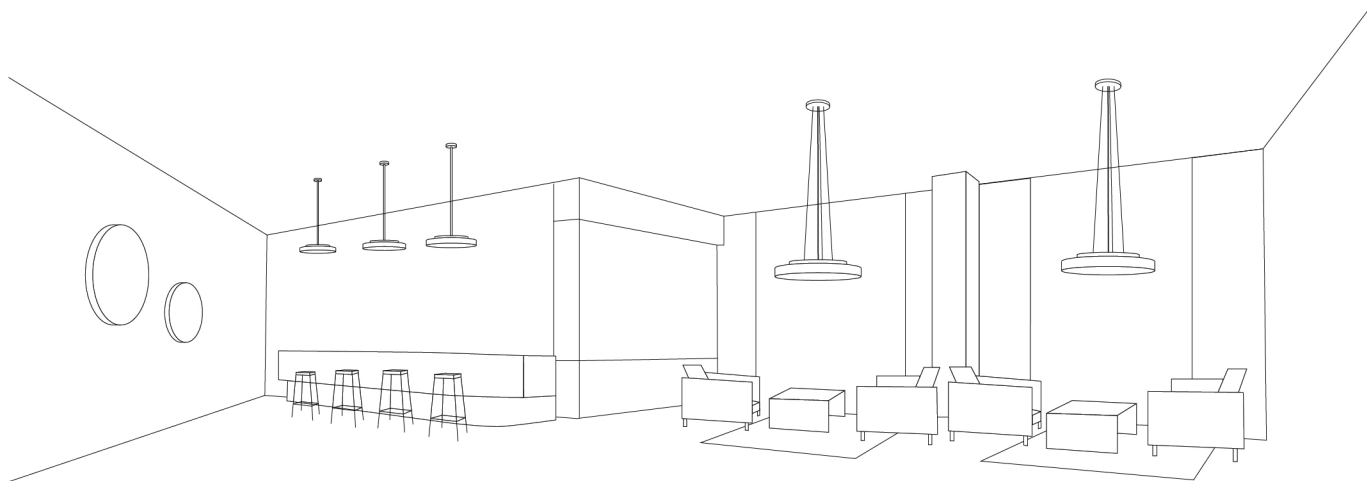

Technical data

	Size	Power	Lumens	Beam Angle	Efficacy	Driver
❶ Float 300	300mm	24/18/10W switch	3168/2376/1320lm	120°	132lm/W	Phase cut (Build-in), DALI (Build-in)
❷ Float 400	400mm	30/22/17W switch	4038/3025/2244lm	120°	132lm/W	
❸ Float 600	600mm	55/38W switch	7260/5016lm	120°	132lm/W	

General	
Finishes	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black
Material	Metal + Acrylic
IP Rating	IP20
IK Rating	IK07
Lifespan	L80/50,000h
Warranty	5 Years

LED	
CCT	3000K/4000K Switch
CRI	>90
SDCM	<3
UGR	<23

Electrical	
Mounting	Surface mounted Rod suspension (1m) Wire suspension (2m) Wall mounted
Function	Motion sensor

1





Ø 300

2




Ø 400


3




Ø 600



Rod suspension



Wire suspension
300/400



Wire suspension
600

PURATI.



FUSI



FUSI

Designed by npk design b.v.

A series of glamorous spotlights

The typical modular design that combines beauty, precision and versatility. Thanks to their powerful LEDs, our swivelling spotlights deliver ideal for indoor lighting. Our spotlights are available in surface mounted, semi-recessed, or track mounted versions, with wide to focused beam angles. They can be used for presentation, in retail situations, or in museums.






Materials and finishes

Aluminium Die-cast Body
LED Lens
Powder-coated Matt Finish



2 models & 2 finish options

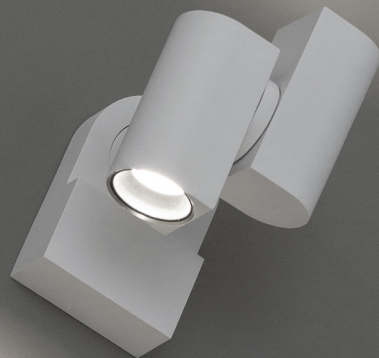


Explore the essence of Fusi series




Elegant look

A shining circular trim is precisely made by
Die-cutting technology to make it aesthetics

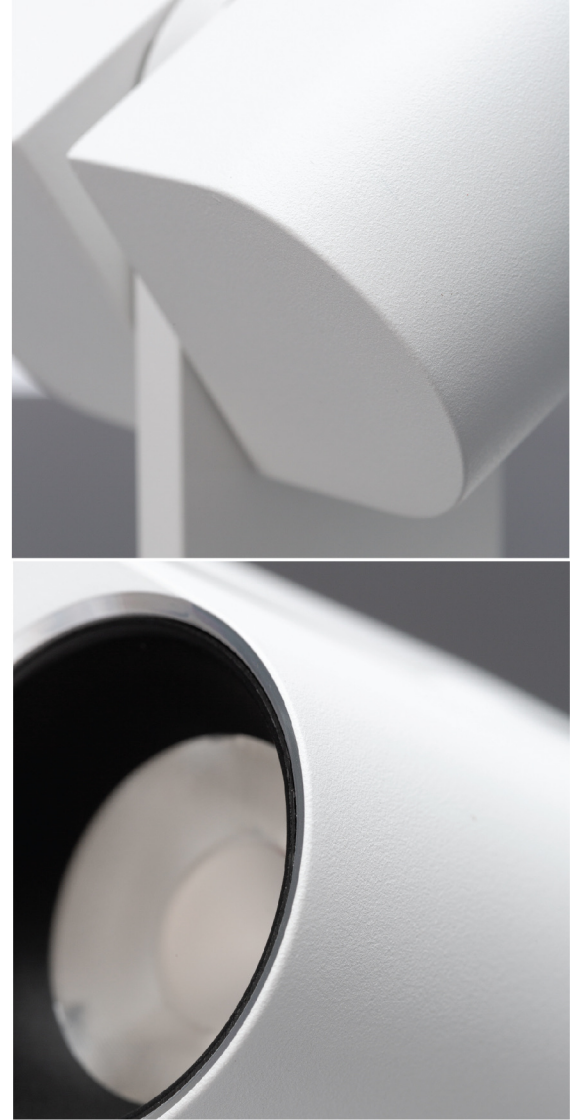




Three colour
temperatures


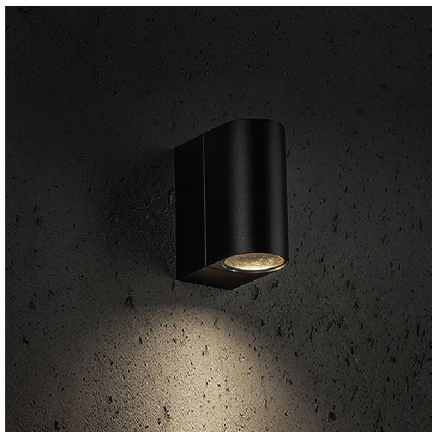


Mounting Options

Wall mounted, track mounted, surface mounted

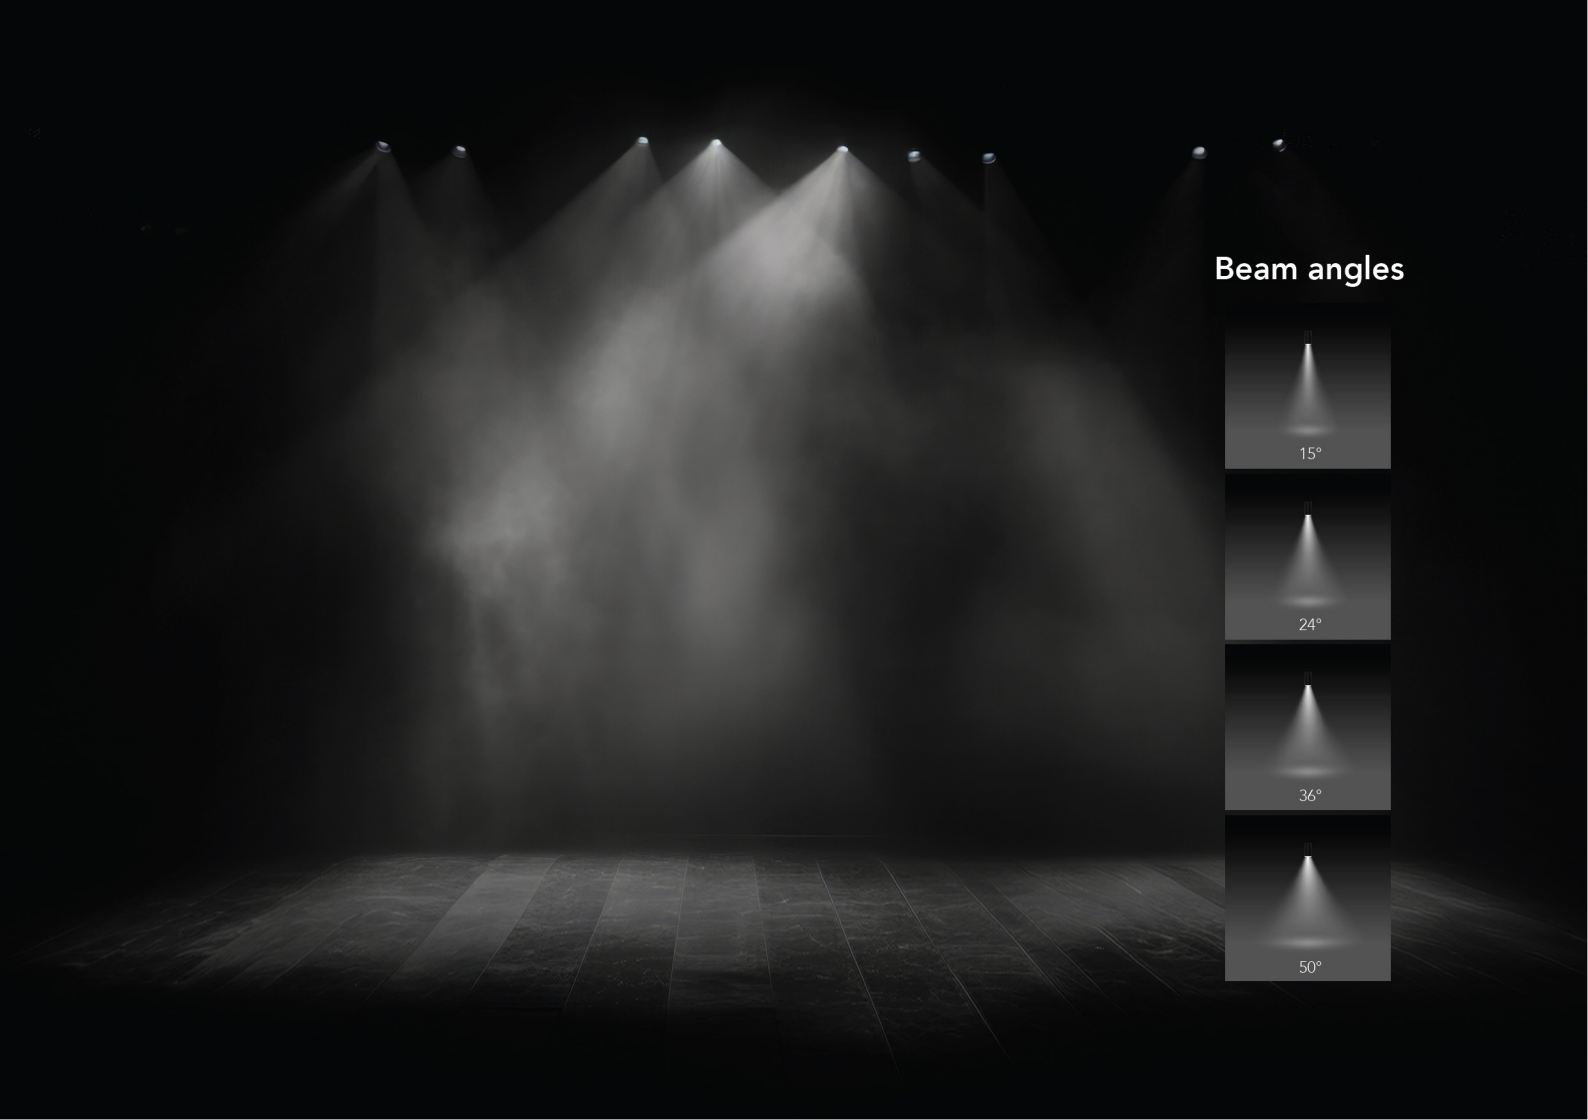


Beam angles



Rotating design



Ceiling arm adjustable system
allows 355° rotatable of
180° tiltable (for double heads)
or 90°tiltable (for single head)








Areas of application

Retail
Office
Residential
Hospitality

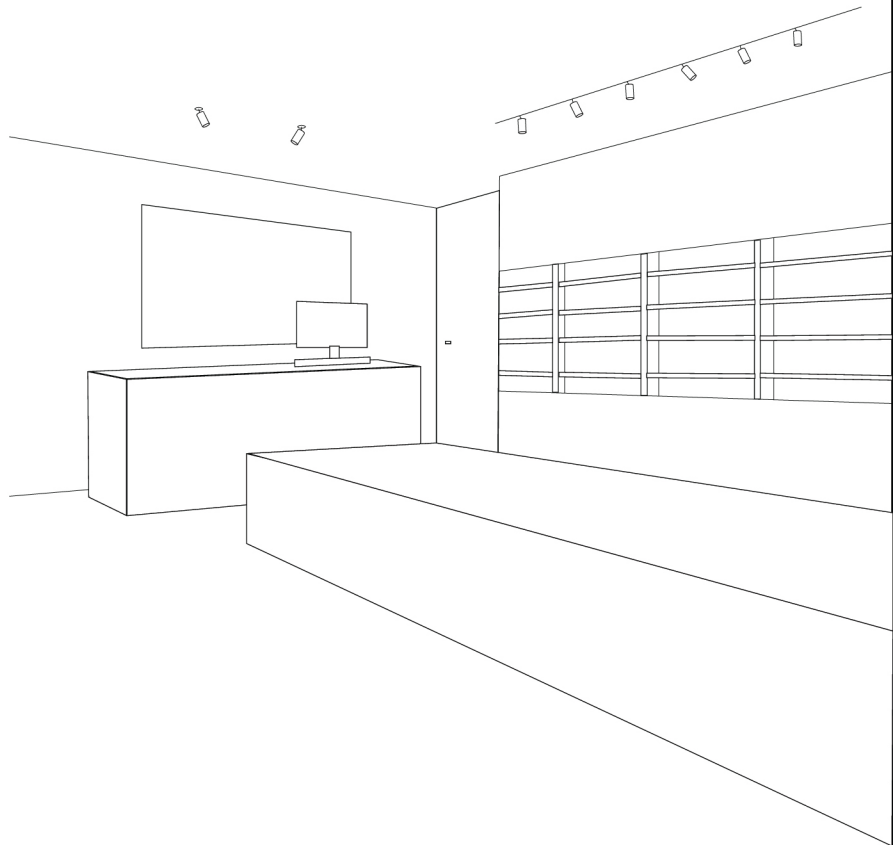

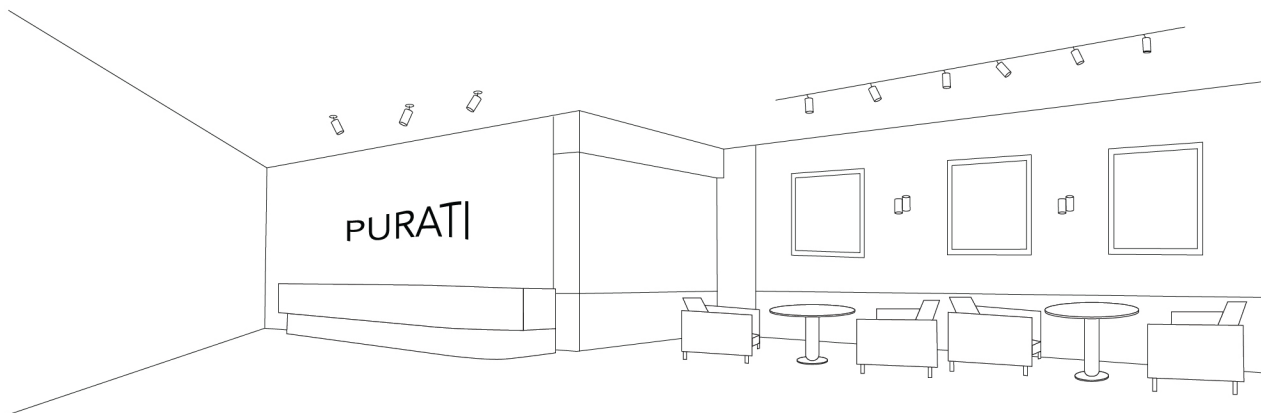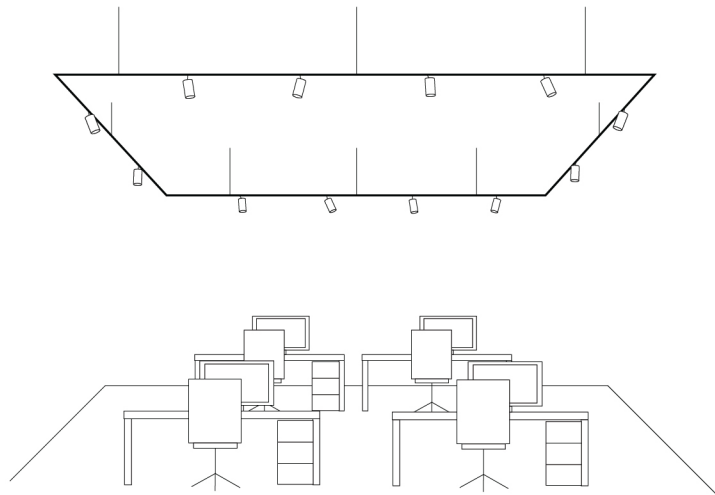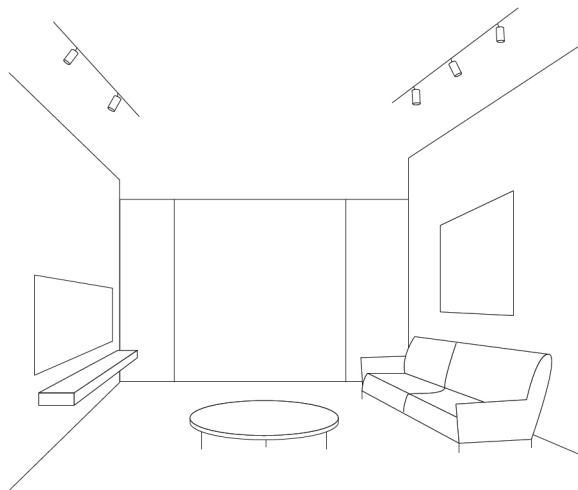

Technical data

		Power	Lumens	Beam Angle	Efficacy	Driver
❶	Fusi 46 spot uno semi-recessed	11/8W switch	780/620lm	15°/24°/36°/50°	75lm/W	Phase cut (Build-in), DALI (Build-in)
❷	Fusi 46 spot duo semi-recessed	20/15W switch	1500/1200lm	15°/24°/36°/50°	75lm/W	
❸	Fusi 46 spot uno surface mounted	11/8W switch	780/620lm	15°/24°/36°/50°	75lm/W	
❹	Fusi 46 spot duo surface mounted	20/15W switch	1500/1200lm	15°/24°/36°/50°	75lm/W	
❺	Fusi 46 spot uno track mounted	11/8W switch	780/620lm	15°/24°/36°/50°	75lm/W	
❻	Fusi 46 spot duo track mounted	20/15W switch	1500/1200lm	15°/24°/36°/50°	75lm/W	
❼	Fusi 46 spot wall uno	6W	510lm	15°/24°/36°/50°	85lm/W	
❽	Fusi 46 spot wall duo	12W	960lm	15°/24°/36°/50°	80lm/W	


General	
Finishes	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black
Material	Powder Coated Aluminium
IP Rating	IP20
Lifespan	L80/50,000h
Warranty	5 Years

LED	
CCT	3000K/4000K/2700K
CRI	>95
SDCM	<3
UGR	<13


Electrical	
Mounting	Surface mounted Wall mounted Track mounted Semi-recessed

Accessories (optional)
Honeycomb louver Cross louver


1

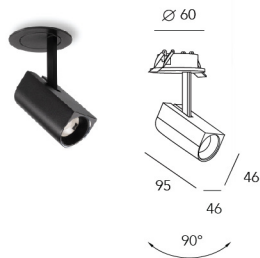


2




3




4




5




6



7



8



Accessories (optional)



Honeycomb louver



Cross louver

PURATI.



DISC

DISC



Designed with simplicity by npk design b.v.

The Disc is an ultra-thin, smooth and high level of diffused brightness. The series is available in a variety of sizes, mounting options and functionalities, making the lighting solution perfect for residential and commercial applications.



The initial design

Housing height
17mm

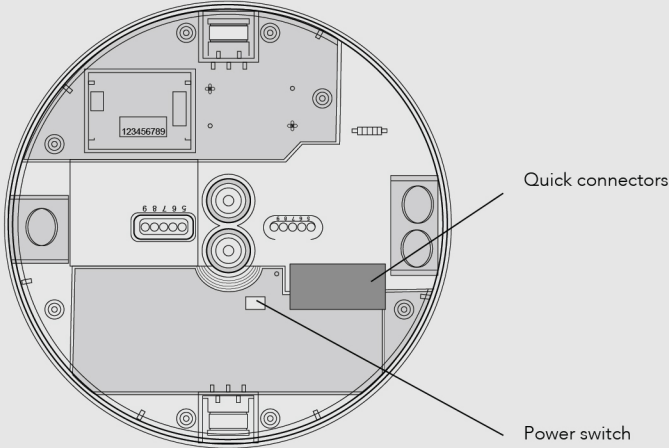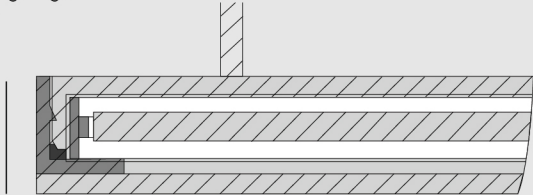




Explore the essence of Disc series

Simplified integration

Designed for an ultra-thin design of just 39mm in height including build-in LED driver.

Direct and Indirect light distribution

Equipped with the excellent reflector technology and combined with frosted opal diffuser providing a smooth, uniform and ambient light.

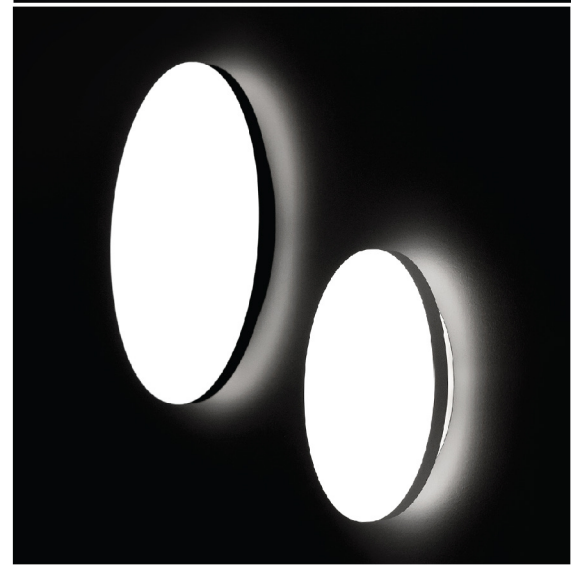



Versatility





Configurable in various sizes, colors, mounting and power options, ideal for any interior project.



Areas of application

Residential
Multi-Residential
Office
Hospitality
Hotel



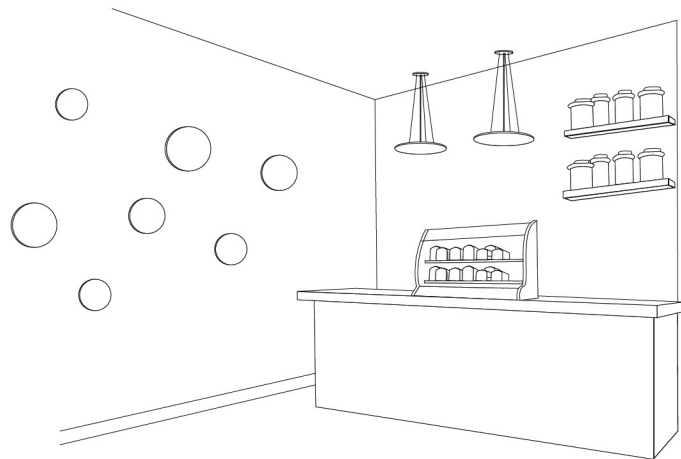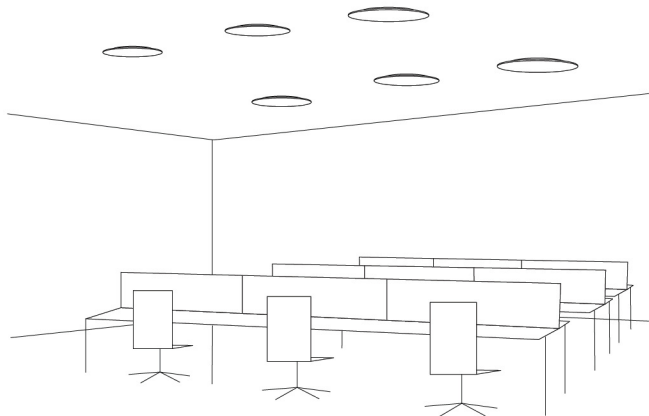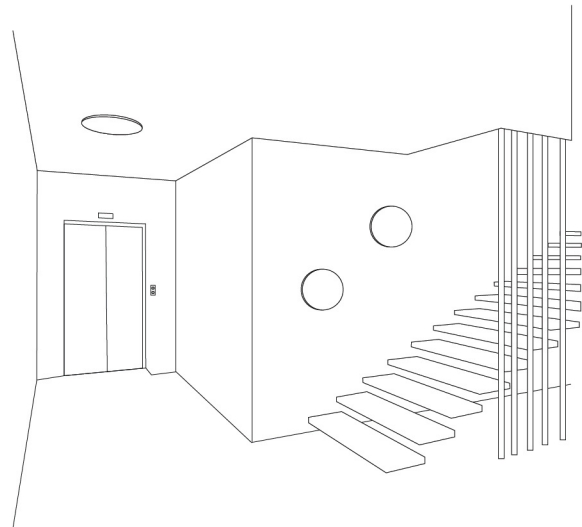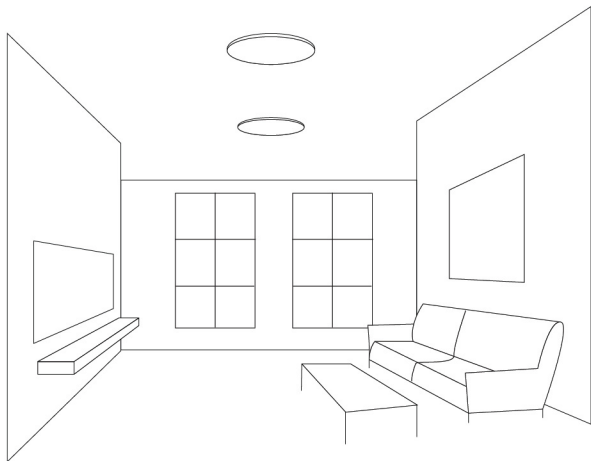

Technical data


		Size	Power	Lumens (at 3000k)	Beam Angle	Efficacy	Driver
1	Disc 220	220mm	15/10/8W	1500/1000/800lm	120°	100lm/W	Phase cut (Build-in), DALI (Build-in)
2	Disc 300	300mm	24/18/10W	2400/1800/1000lm	120°	100lm/W	
3	Disc 450	450mm	30/24/18W	3000/2400/1800lm	120°	100lm/W	

General	
Finishes	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black
Material	Aluminium + Polycarbonate
IP Rating	IP20
Lifespan	L80/50,000h
Warranty	5 Years

LED	
CCT	3000K/4000K switch
CRI	>90
SDCM	<3
UGR	<23


Electrical	
Mounting	Surface mounted Wall mounted Wire Suspension (2m) Track mounted
Function	Motion sensor Emergency light (90 mins @ 2W)

1




Ø 220

2




Ø 300


3



Ø 450



Wire suspension
300



Track mounted
220/300

PURATI.

SLICE






SLICE 2.0

Designed by npk design b.v.

**Quality design, multiple functionalities and
fast installation**

The Slice series comprises of three classic shapes (Circle, Square and Rectangle) with various finishes and sizes that suitable for a wide range of projects. We've updated colour performance, improved IP rating, and equipped with a push lock system for quick installation in the slice series.



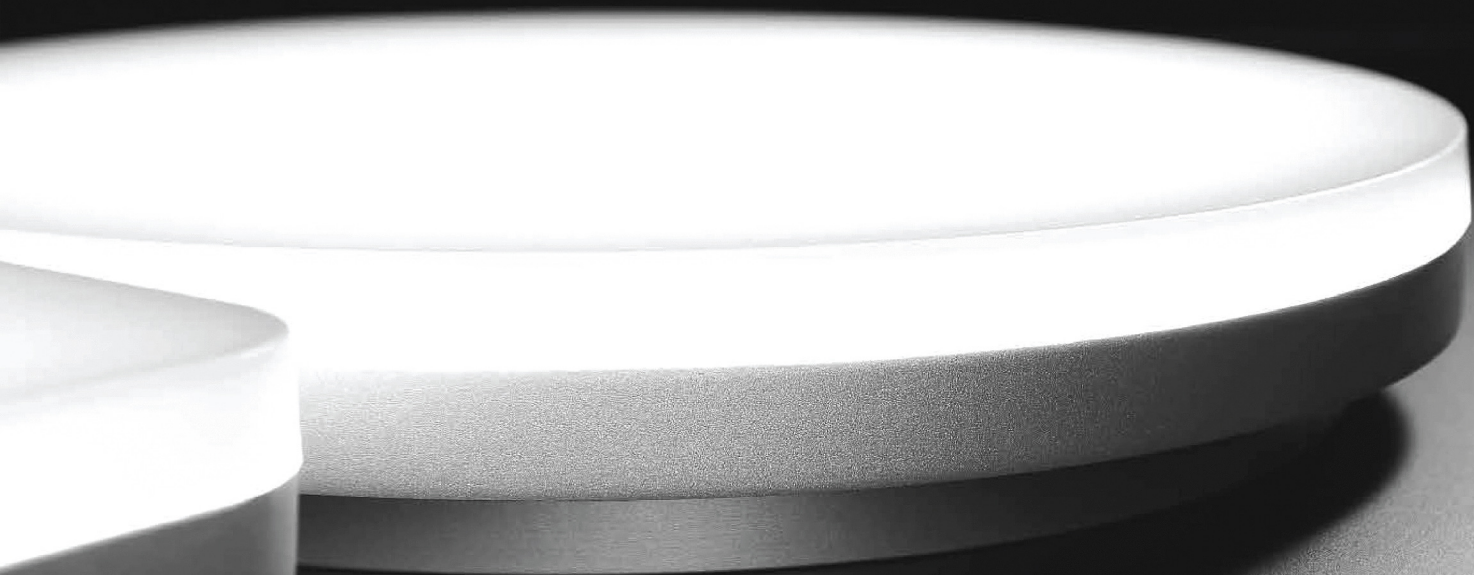

The winner of iF design award 2014






Versatile

The slice series offers different shapes, colors, sizes, power and mounting options that perfect for any applications.



Value for money

Our unique push-locking system and quick wiring connections makes the installation easy and more efficiency for our products.




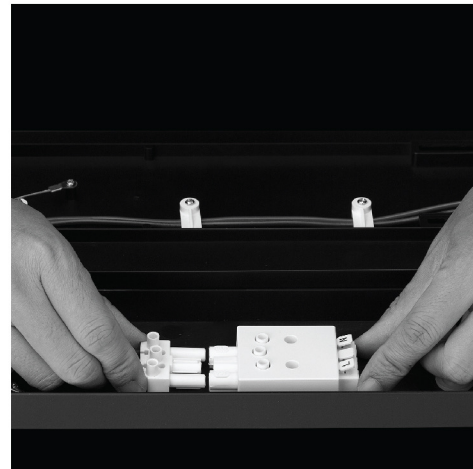


Areas of application



Residential
Multi-Residential
Office
Education
Retail & Hospitality



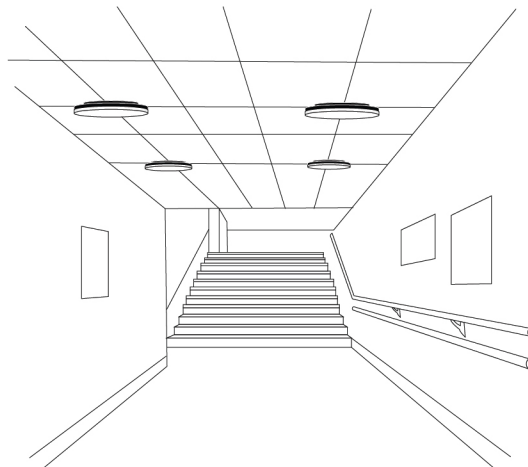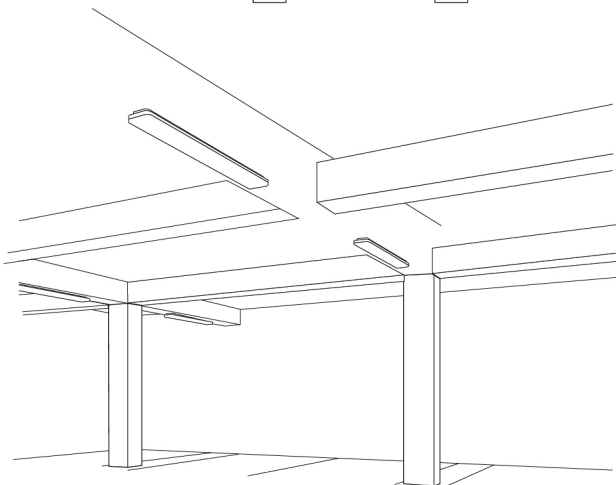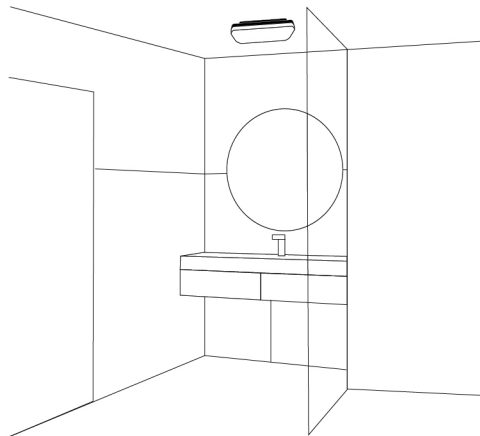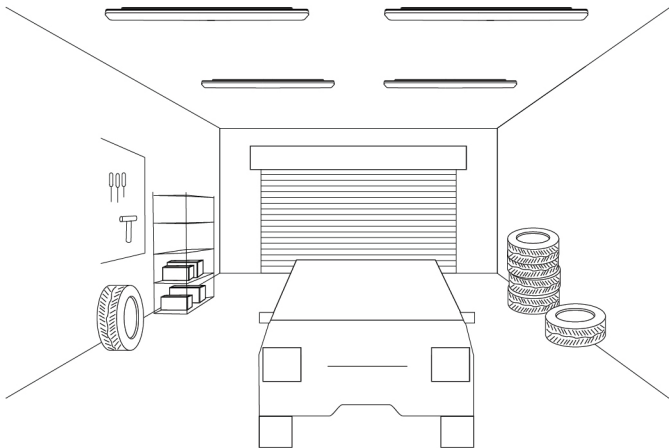


Technical data









	Size	Power	Lumens	Beam Angle	Efficacy	Driver
❶ Slice Circle 220	220mm	15W/10W switch	1500/1000lm	120°	100lm/W	Phase cut (Build-in), DALI (Build-in)
❷ Slice Circle 270	270mm	24/18/10W switch	2400/1800/1000lm	120°	100lm/W	
❸ Slice Circle 270 Recessed Frame	270mm	24/18/10W switch	2400/1800/1000lm	120°	100lm/W	
❹ Slice Circle 400	400mm	32/24W switch	3200/2400lm	120°	100lm/W	
❺ Slice Circle 600	600mm	55/38W switch	5500/3800lm	120°	100lm/W	
❻ Slice Sqaure 210	210mm	15/10W switch	1500/1000lm	120°	100lm/W	
❼ Slice Sqaure 260	260mm	24/18/10W switch	2400/1800/1000lm	120°	100lm/W	
❽ Slice Sqaure 400	400mm	32/24W switch	3200/2400lm	120°	100lm/W	
❾ Slice Long 900	900mm	32/24W switch	3200/2400lm	120°	100lm/W	
❿ Slice Long 1200	1200mm	38/29W switch	3800/2900lm	120°	100lm/W	
⓫ Slice Long 1500	1500mm	50/40W switch	5000/4000lm	120°	100lm/W	

General	
Finishes	<input type="checkbox"/> White
	<input type="checkbox"/> Black
	<input type="checkbox"/> Silver
Material	Polycarbonate
IP Rating	IP54
Lifespan	L80/50,000h
Warranty	5 Years

LED	
CCT	3000K/4000K switch
CRI	>90
SDCM	<3
UGR	<23

Electrical	
Mounting	Surface mounted
	Wall mounted
	Wire Suspension (2m)
	Recessed
Function	Motion sensor
	Emergency light (180 mins @ 4W)
	Emergency lighting+motion sensor



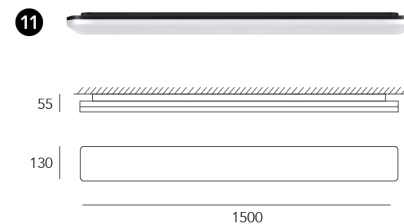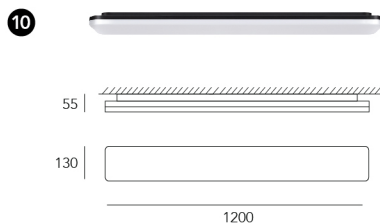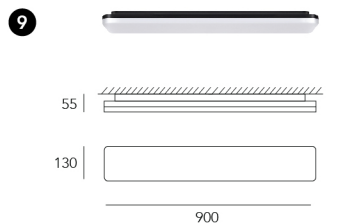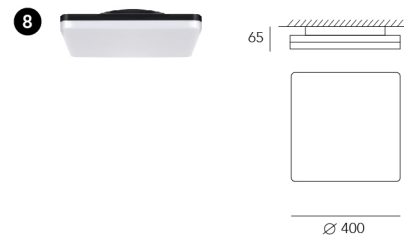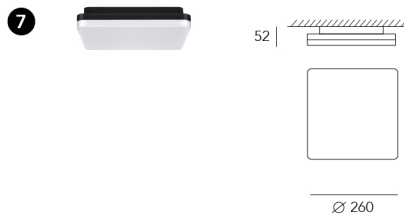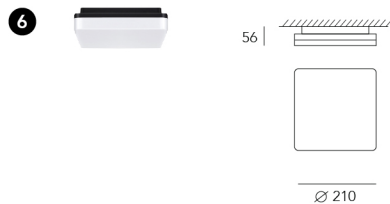

PURATI.

VERSO





VERSO

Designed by npk design b.v.

Built for modern working and learning space

The Verso series by European design is an independent office luminaire offering outstanding efficiency and maximum visual comfort. It's a direct and indirect lighting. Available in a variety of mounting options: for pendant, ceiling/wall surface mounted.





Opal

The image displays two lighting diffuser options against a dark background. On the left is the 'Opal' diffuser, which is a smooth, white, rectangular panel with rounded corners. On the right is the 'Microprismatic' diffuser, which is a white, rectangular panel with a fine, grid-like texture and rounded corners. Both panels are shown from a slightly elevated perspective, highlighting their thickness and the way they catch the light.

Microprismatic

Two options for diffuser

General illumination brings harmonious brightness to any space.
UGR <19 version fit perfectly for office lighting use


Explore the essence of Verso series

The impressive design

Curved aluminium, rounded ends and slim trim design

Modern

Minimal look thanks to the Thin Design Concept

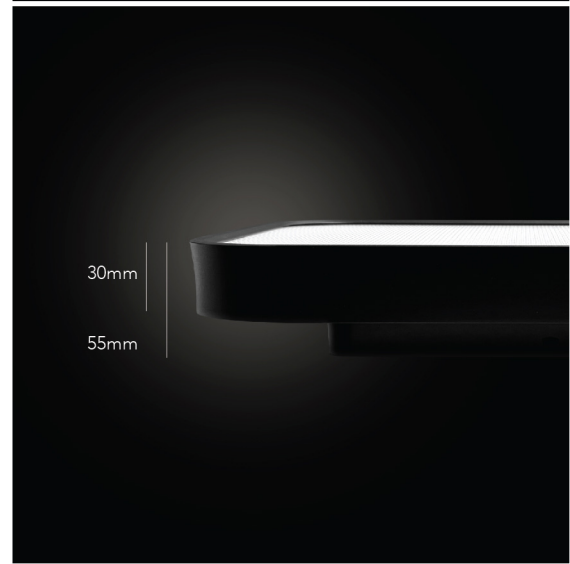



Surface mounted or suspension



Direct and indirect lighting



Versatile








Areas of application

Office
Education
Retail
Hospitality

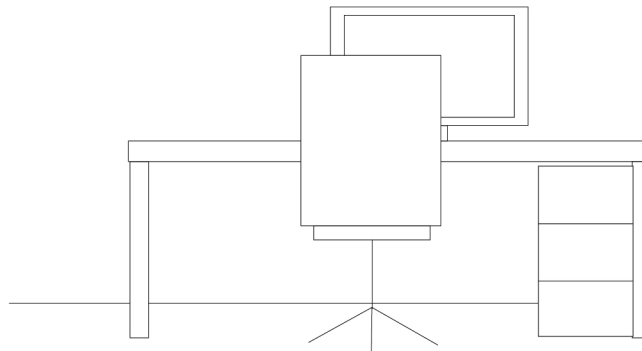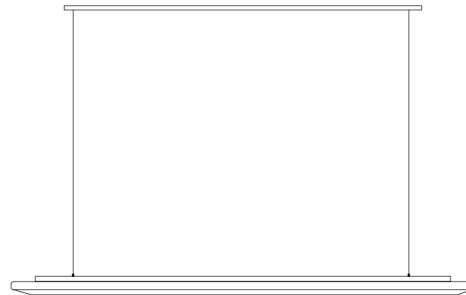

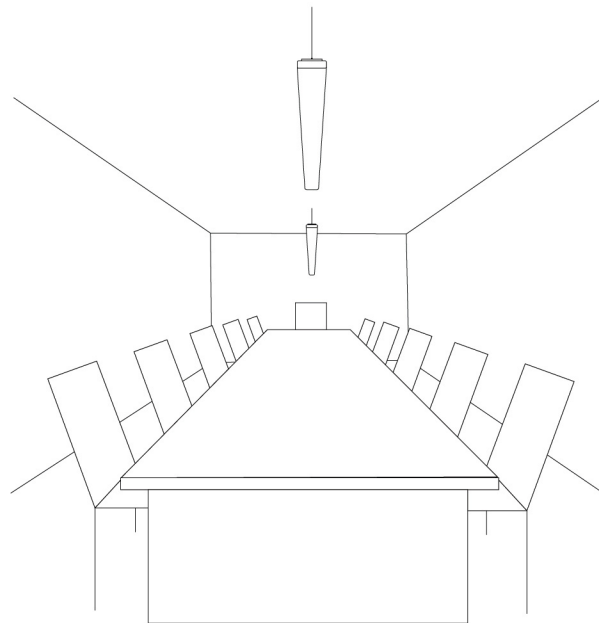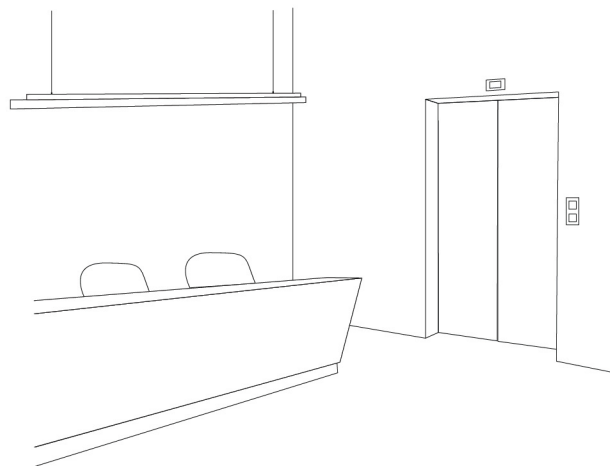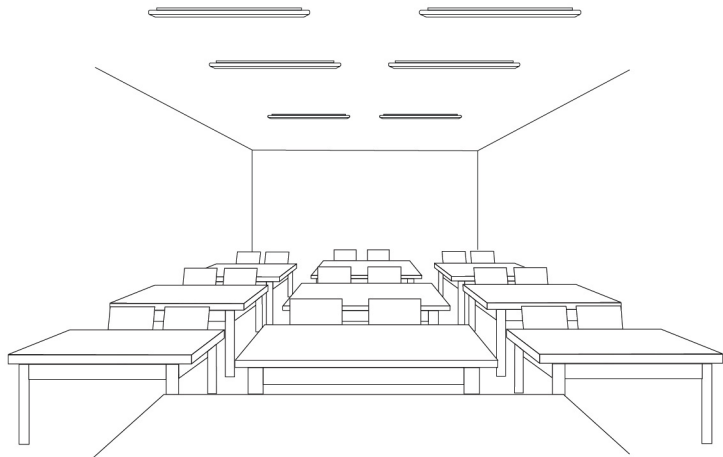

Technical data

		Size	Power	Lumens (at 3000k)	Beam Angle	Efficacy	Driver
❶	Verso 1200	1200mm	20/30/38W	2000/2900/3850lm	120°	100lm/W	Phase cut (Build-in), DALI (Build-in)
❷	Verso 1200 office	1200mm	20/30/38W	2000/2900/3850lm	90°	100lm/W	
❸	Verso 1500	1500mm	30/40/50W	2850/3750/4650lm	120°	100lm/W	
❹	Verso 1500 office	1500mm	30/40/50W	2850/3750/4650lm	90°	100lm/W	

General	
Finishes	<input type="checkbox"/> Matt brushed black
	<input checked="" type="checkbox"/> Matt brushed silver
	<input type="checkbox"/> Matt painting white
Material	Aluminum
IP Rating	IP20
Lifespan	L80/50,000h
Warranty	5 Years

LED	
CCT	3000K/4000K
CRI	>90
SDCM	<3
UGR	<19/<23

Electrical	
Diffuser	Opal Micro-prismatic optional
Light distribution	Direct only Direct and indirect lighting optional
Mounting	Surface mounted Wire Suspension (2m) Wall mounted
Function	Motion detection (Corridor Function) Emergency light (180 mins @ 4W)


1



2



1200



Wire suspension


3



4



1500

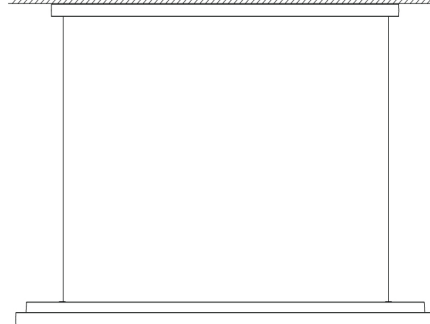


Wire suspension

PURATI.



STORM

STORM

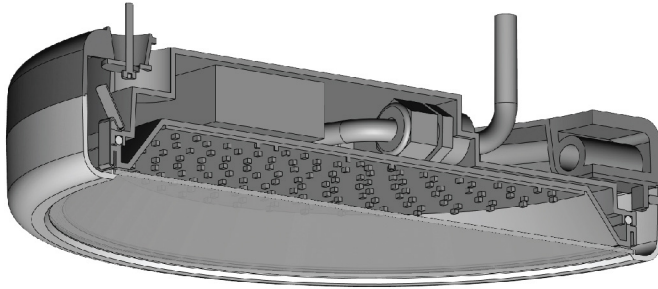


Designed by npk design b.v.

**A good choice for ceiling and wall
in outdoor areas**

The Storm is a strong outdoor luminaire featuring robust, durable, long-lasting used for tough environments. A complete range of fixtures with its installation versatility and functionality for architectural exterior lighting.



The initial design

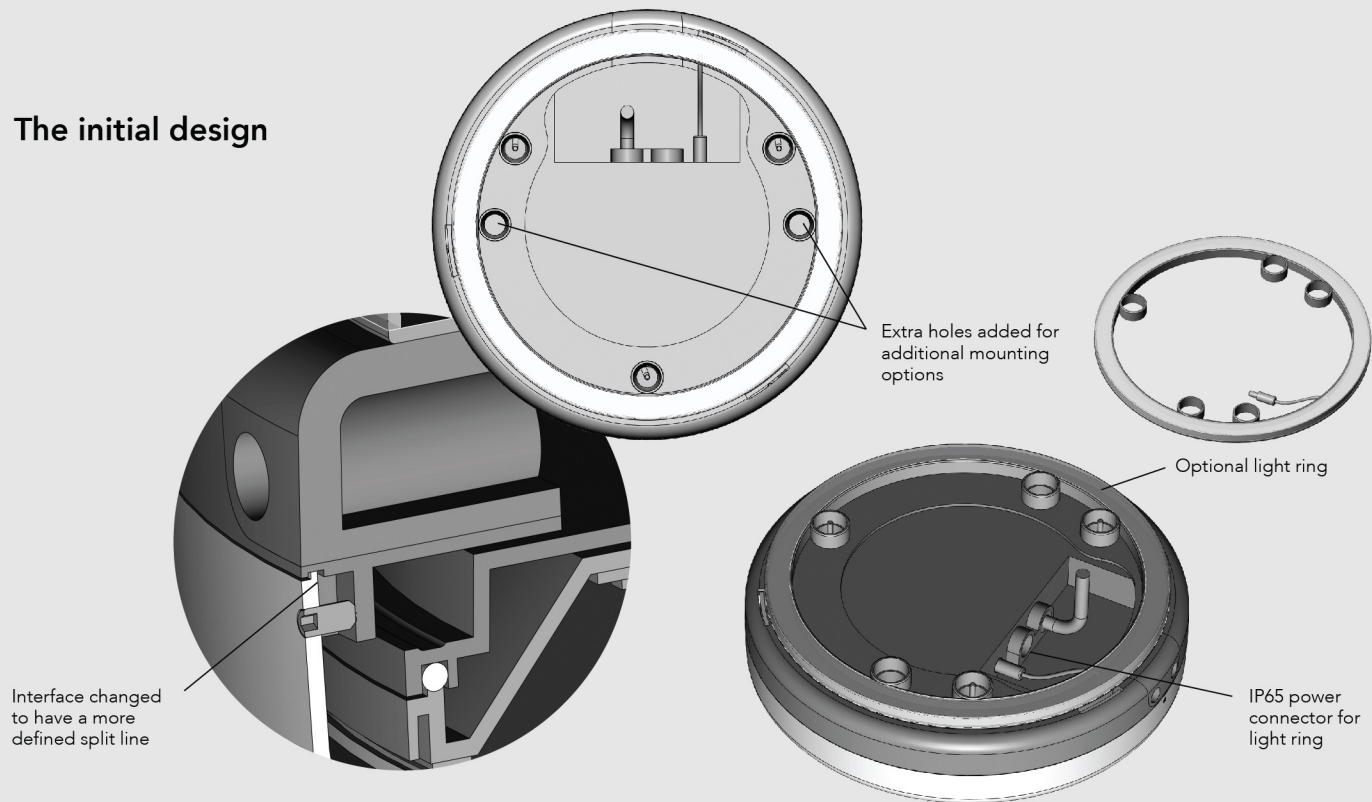

Functionality options

Open face and eyelid
variations with PIR sensor or
Emergency light (on request).



Explore the essence of Storm IP65 series

Designed for durability

High grade aluminium and pre-treated before powder coating ensuing high corrosion resistance, IP65 rating protection against dust and jets of water from all directions.

European design

Flat Slim put, beautifully robust, ease installation. With its classic round design and modern lighting options, Storm IP65 series is a multi-talent for general lighting and accent lighting.






Optional light ring

Extra light ring added for additional indirect lighting options.

The image shows a minimalist interior with a grey concrete wall and a dark floor. Three circular lights are mounted on the wall, each with a black frame. The leftmost light is illuminated with a warm orange glow, the middle one with a bright white light, and the rightmost one with a cool blue light. To the right of the lights, a white door is open, revealing a bright white space beyond. The door has a silver handle and a lock mechanism.



Multiply lumen
and color




Lumen and color
temperature switchable
by using the switch in
the installation

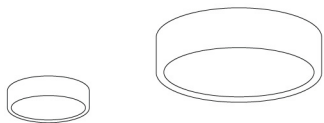

Areas of application

Multi-Residential
Commercial building
Education
Industrial outdoor areas
Public space

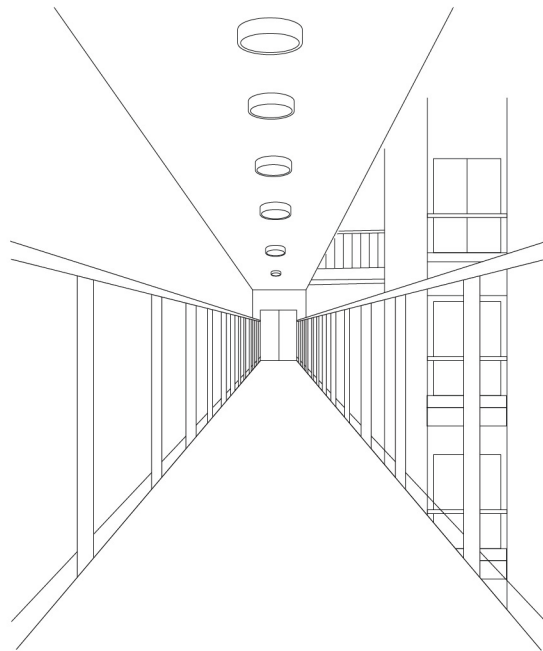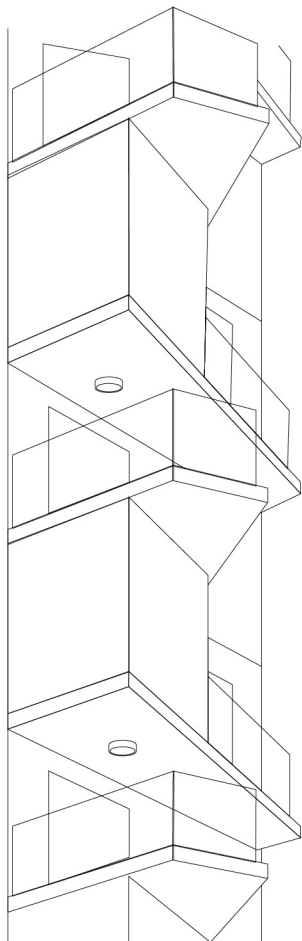

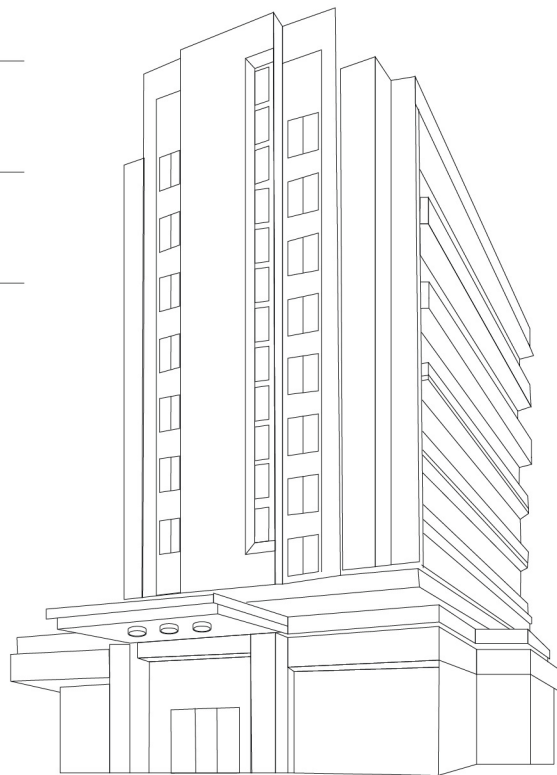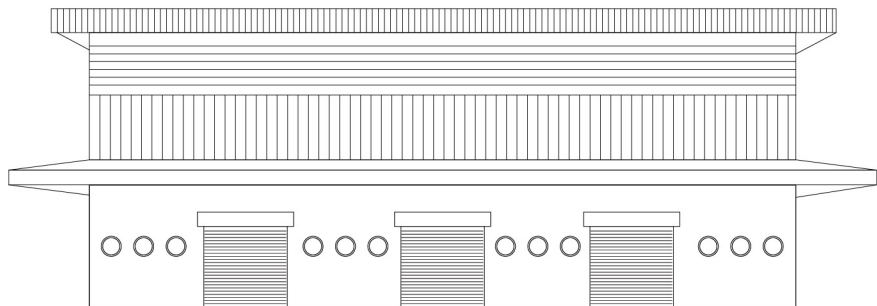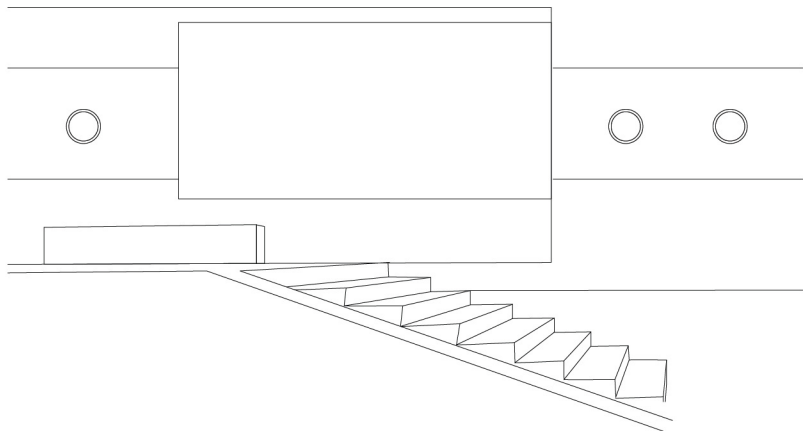

Technical data


	Size	Power	Lumens	Beam Angle	Efficacy	Driver
❶ Storm 325	325mm	24/18/10W	2700/2050/1100lm	110°	110lm/W	Phase cut (Build-in), DALI (Build-in),
❷ Storm 325 glare guard	325mm	24/18/10W	2700/2050/1100lm	110°	110lm/W	
❸ Storm 325 sensor	325mm	24/18/10W	2700/2050/1100lm	110°	110lm/W	
❹ Storm 325 glare guard sensor	325mm	24/18/10W	2700/2050/1100lm	110°	110lm/W	

General	
Finishes	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black
Material	Die-cast Aluminium +PC
IP Rating	IP65
IK Rating	IK10
Lifespan	L80/50,000h
Warranty	5 Years

LED	
CCT	3000K/4000K
CRI	>90
SDCM	<3
UGR	<22

Electrical	
Light distribution	Direct and indirect lighting optional
Mounting	Surface mounted Wall mounted
Function	PIR sensor Emergency (2W 90mins/180mins Lithium cell)

1




Ø 325

3




Ø 325

2



Ø 325

4



Ø 325

The image features four cylindrical pendant lights hanging from a dark ceiling. Two are white and two are black. They are arranged in a staggered pattern. The white lights are illuminated from the bottom, casting a warm glow. The black lights are also illuminated from the bottom, but the light is less visible. The background is a dark, slightly textured surface.

PURATI.

BEAM



BEAM

Simple. Versatile. Efficient

The Beam Collection is classic tubular structure and contemporary design, making it a versatile lighting fixture that can seamlessly integrate into any interior space. Designed for visual comfort and lumen performance.





A wide range of accessories

4 Baffle finish
(white, silver, black, gold)

Explore the essence of Beam series

Quality Design

The simple cylindrical design with extremely precise beam angles, for both general and accent lighting
Luminaire housing and Baffle made of aluminium
Designed for easy mounting with no visible screws

Visual comfort

A deep-set light source and excellent optics offering maximum cut-off angles make it great comfort with $UGR < 19$
High power LEDs for maximum efficiency
(up to 1000lm in $\varnothing 45\text{mm}$ tube luminaire)





3 secondary
optics

Honeycomb Lens for reduced glare
Soften Lens for softening beam edges
Linear Lens for elliptical beams

Multiple mounting options


The Beam Collection comes with 5 mounting and various lengths 450mm, 600mm, 800mm to suit the specified lighting requirements.




Surface mounted /
Ceiling mounted suspension /
Recessed suspension /
Trimless recessed suspension /
Track mounted suspension



Areas of application

Office
Residential
Retail
Hospitality

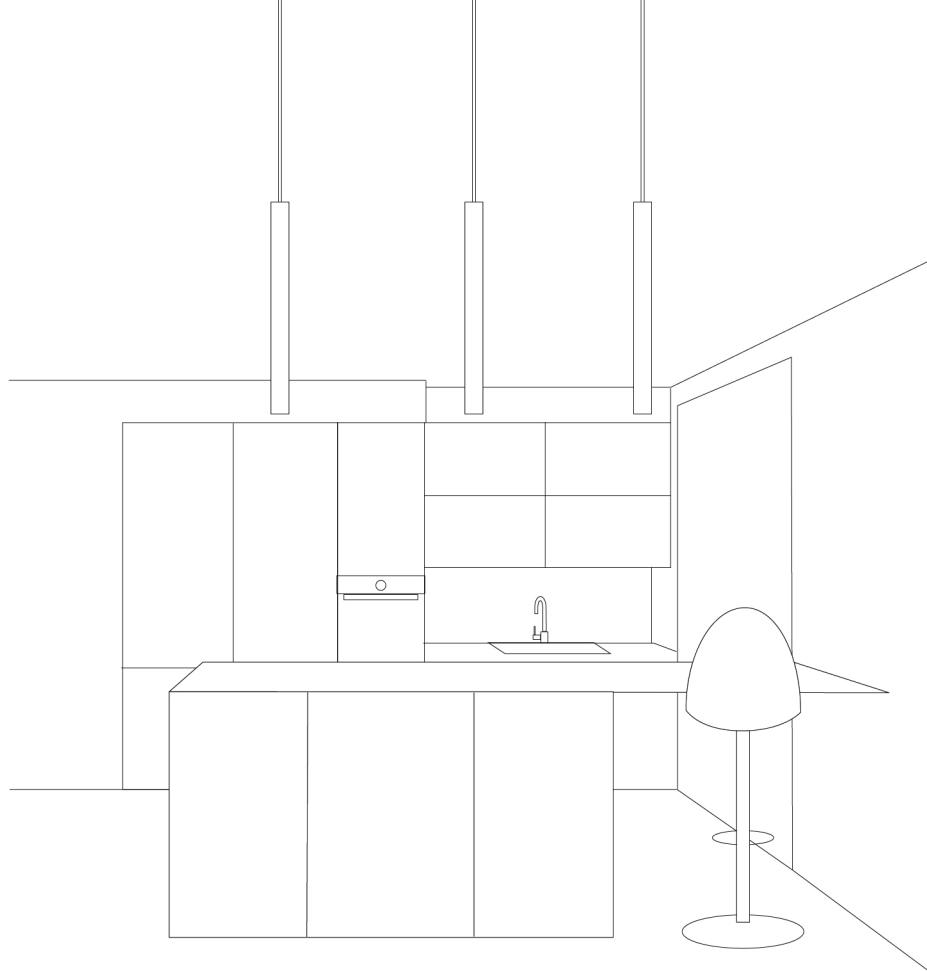

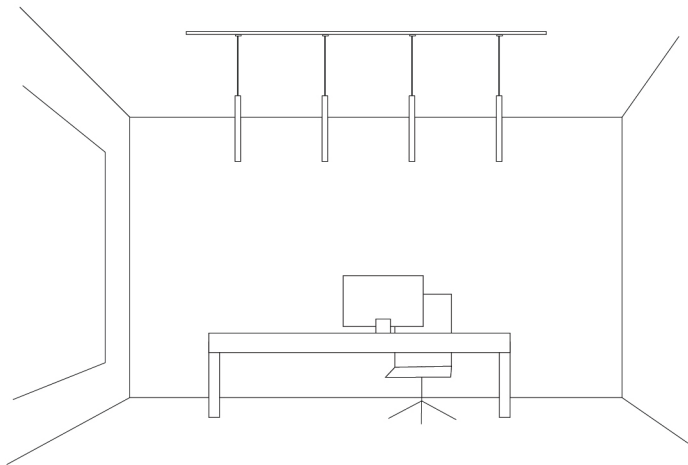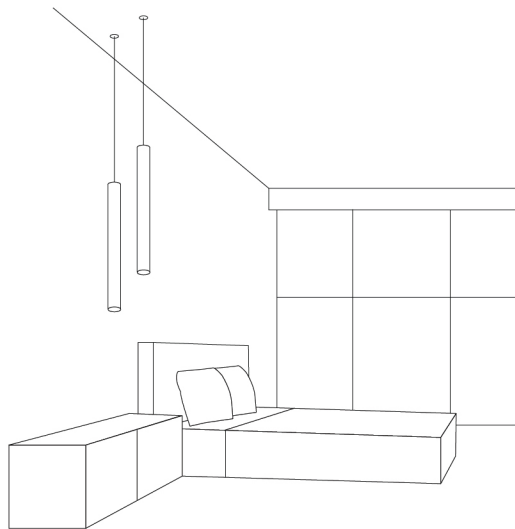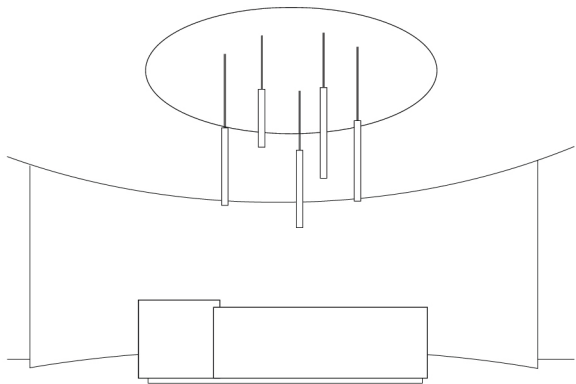

Technical data


	Size	Power	Lumens	Beam Angle	Efficacy	Driver
① Beam 450	450mm	13W	1000/990/970lm	15°/24°/38°	75lm/W	Triac (Build-in), DALI (Build-in)
② Beam 600	600mm	13W	1000/990/970lm	15°/24°/38°	75lm/W	
③ Beam 800	800mm	13W	1000/990/970lm	15°/24°/38°	75lm/W	

General	
Finishes	<div><div></div> White</div> <div><div></div> Black</div>
Baffle finish	<div><div></div> White</div> <div><div></div> Black</div> <div><div></div> Silver</div> <div><div></div> Gold</div>
Material	Powder Coated Aluminium
IP Rating	IP20
Lifespan	L90/50,000h
Warranty	5 Years


LED	
CCT	3000K/4000K
CRI	>90
SDCM	<3
UGR	<19

Electrical	
Mounting	Surface mounted
	Ceiling mounted suspension
	Recessed suspension
	Trimless recessed suspension
	Track mounted suspension



1




2




3



Trimless recessed
suspension/
Recessed suspension



Track mounted
suspension
3 circuit 4 wire
track head



Ceiling mounted
suspension

PURATI.



POINT



POINT TRACK

Designed to provide visual comfort and minimal glare, offering flexibility for any lighting design.

As part of the Point collection, the Point R track light with wide to focused beam angles come with 3 different sizes and is compatible with 3 circuit track. They can be used for presentation, in retail situations, office, hospitality, museums or living spaces.





Explore the essence of Point Track series

Rotating Design

Ceiling arm adjustable system allows 355° rotatable and 90° Tilttable

Great in Light Quality

High colour rendering CRI>97 with low glare UGR<19, Point R Track Light works for flexible lighting for any project requirements.







A wide range
of Baffle options



Deep design for visual comfort with magnetic anti-glare reflectors available in 4 different finishings perfect for any interiors.

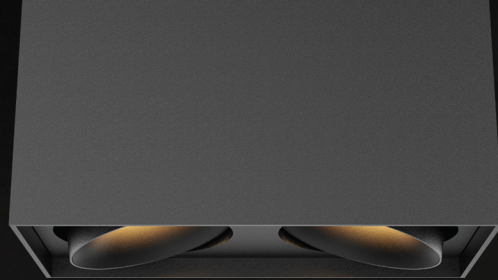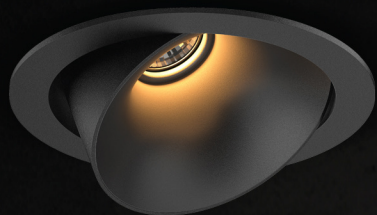


POINT

The dark light concept downlight collection

The Point collection is a classic and deep recessed downlight, designed for maximum visual comfort. This range is available in a wide variety of models, sizes, power and mounting options. Additionally, offering a wide range of baffle options, making it suitable for any interiors.





Multiple colour temperature options

3000K CRI>97 as standard

2700K CRI>97 or 4000K CRI>97 as request

2700K-6500K (tunable white) as request



Explore the essence of Point series

Low-glare design

It creates a visual comfort with $UGR < 19$, meeting all your daily lighting requirements.


Flexibility

Magnetic reflector design not only makes the Point Family stranger and more flexible, but also it can be easily and simply to change different reflectors after installation.

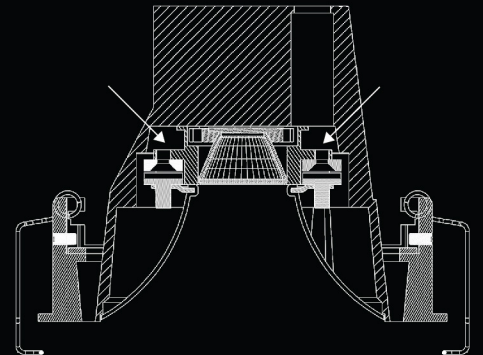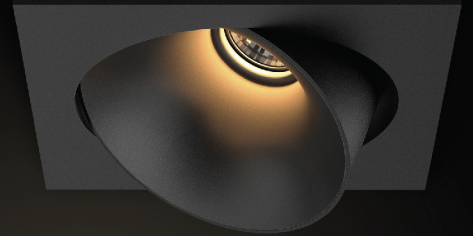





Finish options




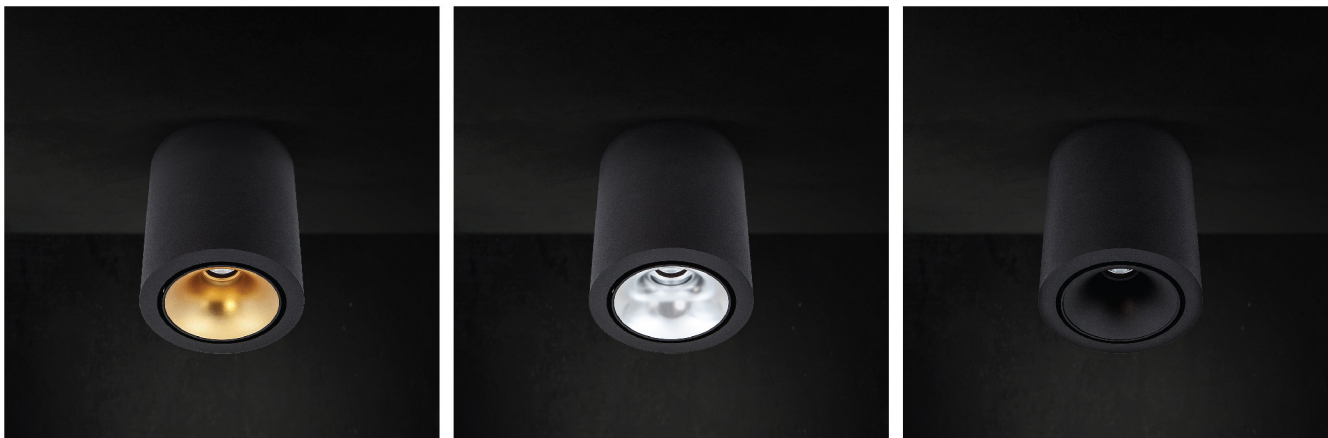


Available in 2 trim finishes: textured black, textured white.
Can be fitted with any of the 5 baffle finishes: textured white,
textured black, textured gold, textured glossy black, textured silver

Areas of application

Retail
Office
Residential
Hospitality
Education

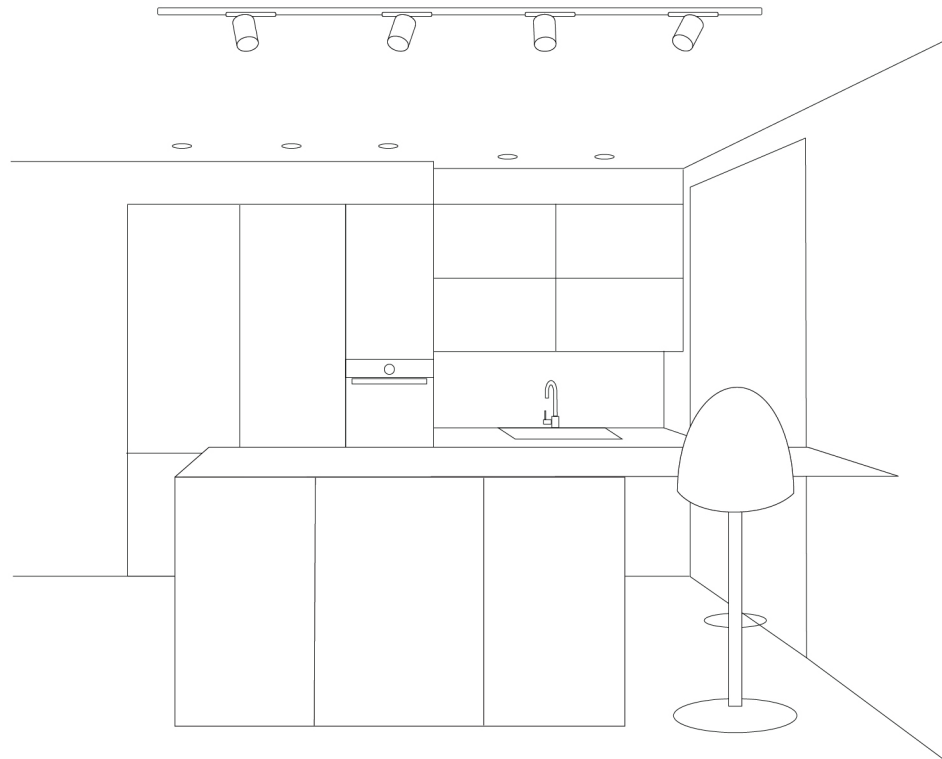

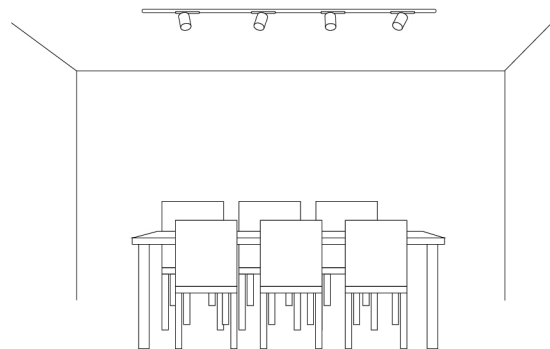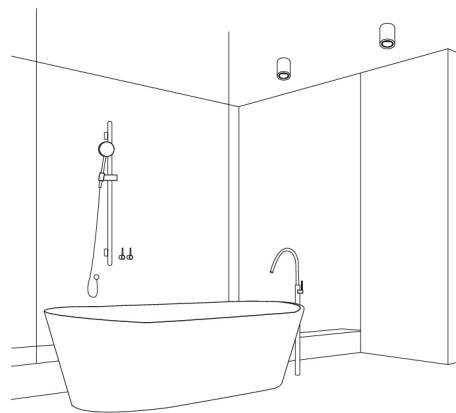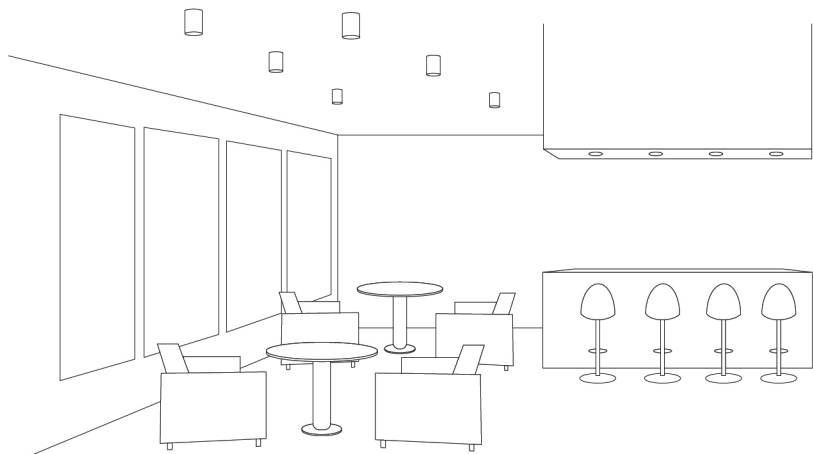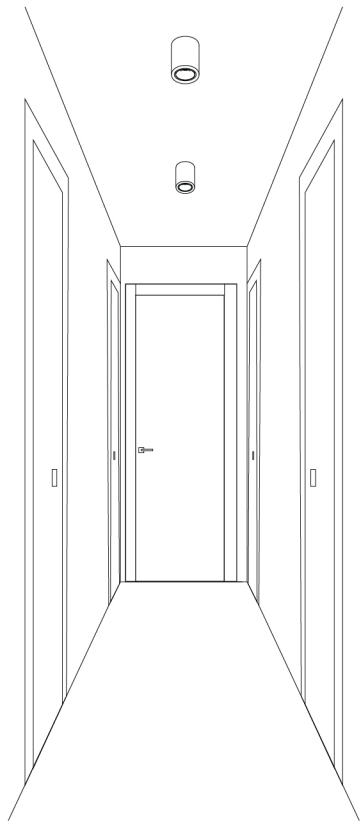




Technical data

	Size	Power	Lumens	Beam Angle	Efficacy	Driver
① Point R track light S	60mm	10W	840lm	24°/40°/60°	up to 85lm/W	Phase cut (Build-in), DALI (Build-in)
② Point R track light M	75mm	20W	1620lm	24°/40°/60°	up to 85lm/W	
③ Point R track light L	93mm	36W	2850lm	24°/40°/60°	up to 85lm/W	

General	
Finishes	<input type="checkbox"/> White
	<input checked="" type="checkbox"/> Black
Baffle finishes	<input type="checkbox"/> White
	<input checked="" type="checkbox"/> Black
	<input type="checkbox"/> Silver
	<input type="checkbox"/> Gold
Material	Aluminium
IP Rating	IP20
Lifespan	L90/50,000h
Warranty	5 Years

LED	
CCT	2000K/3000K/4000K
CRI	>97
SDCM	<3
UGR	<19

Electrical	
Mounting	Track mounted
Function	Casambi



Technical data


	Size	Power	Lumens	Beam Angle	Driver
❶ Point R fixed S surface mounted	100mm	10W	850lm	24°/40°/60°	Phase cut (Build-in), DALI (Build-in)
❷ Point R adjustable S surface mounted	87mm	10W	85lm	24°/40°/60°	
❸ Point R adjustable M surface mounted	106mm	15W	1200lm	24°/40°/60°	
❹ Point S double adjustable surface mounted	170mm	10W	740lm	24°/40°/60°	

General	
Finishes	<input type="checkbox"/> White
	<input checked="" type="checkbox"/> Black
Baffle finishes	<input type="checkbox"/> White
	<input checked="" type="checkbox"/> Black
	<input checked="" type="checkbox"/> High Gloss Black
	<input type="checkbox"/> Silver
	<input type="checkbox"/> Gold
Material	Aluminium
IP Rating	IP20
Lifespan	L90/50,000h
Warranty	5 Years


LED	
CCT	2000K/3000K/4000K
CRI	>97
SDCM	<3
UGR	<19

Electrical	
Mounting	Track mounted
Function	Casambi


1




2



3



4



Technical data

		Size	Power	Lumens	Beam Angle	Driver
1	Point R fixed S ceiling recessed	66mm	10W	760lm	24°/40°/60°	Phase cut (Build-in), DALI (Build-in)
2	Point R fixed M ceiling recessed	83mm	15W	1065lm	24°/40°/60°	
3	Point R fixed L ceiling recessed	106mm	25W	1480lm	24°/40°/60°	
4	Point R fixed XL ceiling recessed	157mm	28W	2640lm	24°/40°/60°	
5	Point R adjustable S ceiling recessed	86mm	10W	850lm	24°/40°/60°	
6	Point R adjustable M ceiling recessed	105mm	15W	1200lm	24°/40°/60°	
7	Point R adjustable L ceiling recessed	135mm	20W	2000lm	24°/40°/60°	
8	Point R trimless fixed ceiling recessed	60mm	10W	740lm	24°/40°/60°	
9	Point R trimless adjustable S ceiling recessed	78mm	10W	740lm	24°/40°/60°	
10	Point S trimless adjustable ceiling recessed	78mm	10W	740lm	24°/40°/60°	
11	Point S fixed S ceiling recessed	65mm	10W	685lm	24°/40°/60°	
12	Point S fixed M ceiling recessed	85mm	15W	1090lm	24°/40°/60°	
13	Point S adjustable S ceiling recessed	86mm	10W	740lm	24°/40°/60°	
14	Point S adjustable M ceiling recessed	105mm	15W	1000lm	24°/40°/60°	
15	Point S Double adjustable S ceiling recessed	170mm	10W	740lm	24°/40°/60°	
16	Point S Double adjustable M ceiling recessed	215mm	15W	1000lm	24°/40°/60°	

General	
Finishes	<input type="checkbox"/> White
	<input checked="" type="checkbox"/> Black
Baffle finishes	<input type="checkbox"/> White
	<input checked="" type="checkbox"/> Black
	<input checked="" type="checkbox"/> High Gloss Black
	<input type="checkbox"/> Silver
	<input type="checkbox"/> Gold
Material	Aluminium
IP Rating	IP20~IP44
Lifespan	L90/50,000h
Warranty	5 Years
LED	
CCT	2000K/3000K/4000K
CRI	>97
SDCM	<3
UGR	<19
Electrical	
Mounting	Ceiling recessed
Function	Casambi

1



Ø 60

72

Ø 66

2



Ø 76

85

Ø 83

3



Ø 100

110

Ø 106

4




Ø 150


106

Ø 157


5




7




9

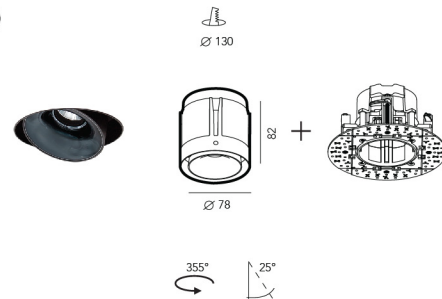


6




8

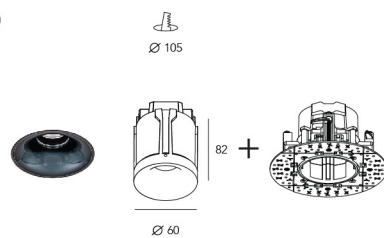


10

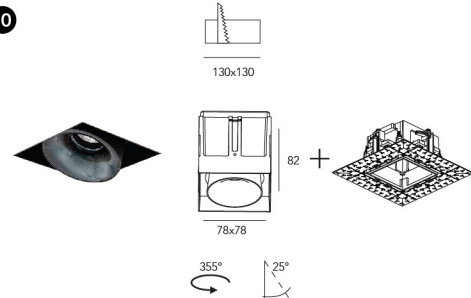


11




13




15




12



14



16

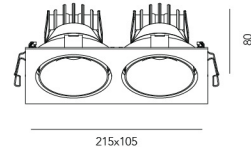

PURATI.



LV 48V

High profile surface/suspended track

Trimless recessed track

Low profile surface track



Spotlight

Luogo 48V


Luogo 48V is the perfect balance of innovation and elegance with the adjustable spotlight, designed for seamless integration into 48V low voltage track systems. Featuring 355° rotation and 90° vertical tilt for precise directional lighting.



Spotlight

Ball

The Ball 48V LED Spotlight, 355° rotation and 60° vertical tilt, can be used anywhere as a compact and visually appealing fixture. The magnetic bezels are available in multiple colours, allowing seamless integration into any décor scheme.

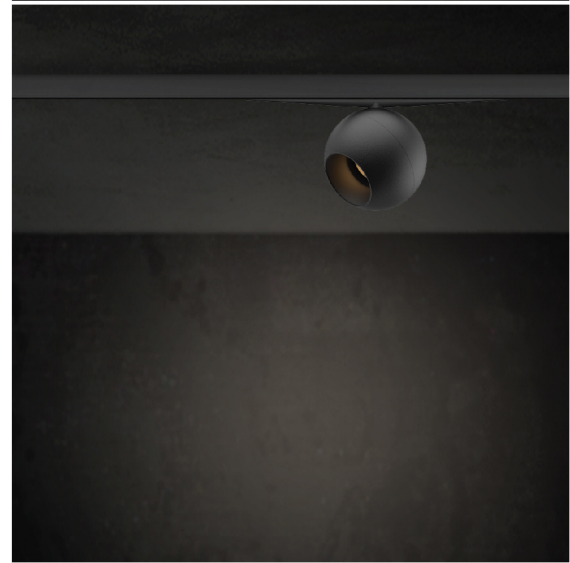



Darklight

Filo Spot

Filo Darklight 48V is the linear luminaire of low glare version for 48V voltage track light applications, available in 203mm and 303mm length options, and 2 finishes.



Linear

Filo Diffused


Filo Diffused 48V is the linear luminaire of diffused light for 48V voltage track light applications, available in 103mm, 203mm and 303mm length options, and 2 finishes.



Wall washer

Box

Box 48V is for wall washer. It's designed to ensure uniform lighting of walls from highest to the lowest points, as well as avoiding shadow areas in zones near the ceiling.

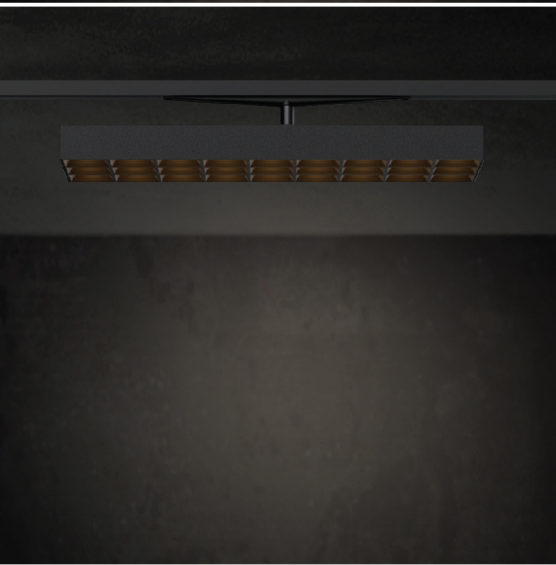

Space Pro

Lightpad

Thin slice design, great in light quality. The Lightpad 48V offers excellent visual comfort and high efficiency values.






Technical data

	Size	Power	Lumens	Beam Angle	Driver
① Luogo 48V-30	30mm	10.5W	777lm	24°/37°/55°	Phase cut (Build-in), DALI (Build-in)
② Luogo 48V-40	40mm	15W	1110lm	24°/37°/55°	
③ Luogo 48V-60	60mm	20W	2000lm	24°/37°/55°	
④ Luogo suspension 48V-30	30mm	10.5W	777lm	24°/37°/55°	

General	
Finishes	<input type="checkbox"/> White
	<input type="checkbox"/> Black
Baffle finishes	<input type="checkbox"/> Glossy black
	<input type="checkbox"/> Frosted silver
	<input type="checkbox"/> Matte white
	<input type="checkbox"/> Matte black
	<input type="checkbox"/> Matte gold
	<input type="checkbox"/> Matte copper
Material	Aluminium
IP Rating	IP20
Lifespan	L90/50,000h
Warranty	5 Years

LED	
CCT	2700K/3000K/4000K
CRI	>90
Accessories (optional)	
Honeycomb louver	

Electrical	
Mounting	Track mounted
Function	Casambi



Accessories (optional)
Honeycomb louver

Technical data



	Size	Power	Lumens	Beam Angle	Driver
1 Ball 48V	64mm	10.5W	777lm	15°/24°/37°/55°	Phase cut (Build-in), DALI (Build-in)
2 Ball-L 48V	64mm	10.5W	777lm	15°/24°/37°/55°	
3 Ball Suspension 48V	64mm	10.5W	777lm	15°/24°/37°/55°	

General	
Finishes	 White
	 Black
Baffle finishes	 Glossy black
	 Frosted silver
	 Matte white
	 Matte black
	 Matte gold
	 Matte copper
	 Glossy silver
Material	Aluminium
IP Rating	IP20
Lifespan	L90/50,000h
Warranty	5 Years


LED	
CCT	2700K/3000K/4000K
CRI	>90

Accessories (optional)
Honeycomb louver

Electrical	
Mounting	Track mounted
Function	Casambi

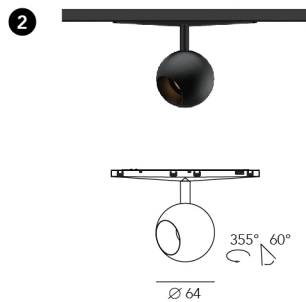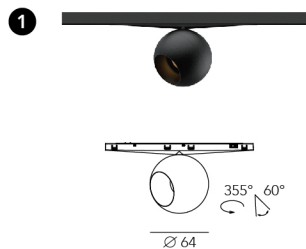

(long-stem for high profile tracks)

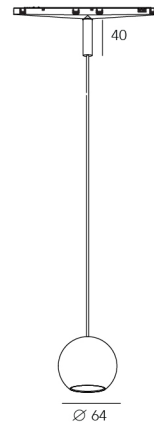

Accessories (optional)



Honeycomb louver

Technical data

		Size	Power	Lumens	Beam Angle	Driver
1	Filo spot 48V-203mm	203mm	10.5W	577lm	55°	Phase cut (Build-in), DALI (Build-in)
2	Filo spot 48V-303mm	303mm	15W	825lm	55°	
3	Filo diffused 48V-203mm	203mm	10.5W	577lm	60°	
4	Filo diffused 48V-303mm	303mm	15W	825lm	60°	

General	
Finishes	<input type="checkbox"/> White
	<input checked="" type="checkbox"/> Black
Material	Aluminium
IP Rating	IP20
Lifespan	L90/50,000h
Warranty	5 Years

LED	
CCT	2700K/3000K/4000K
CRI	>90
UGR	<10

Electrical	
Mounting	Track mounted
Function	Casambi

1



203

3




203

2



303

4



303



Technical data

	Size	Power	Lumens	Beam Angle	Driver
1 Lightpad 48V	273mm	15W	1305lm	60°	Phase cut (Build-in),
2 Lightpad-L 48V	273mm	15W	1305lm	60°	DALI (Build-in)

General	
Finishes	<input type="checkbox"/> White
	<input checked="" type="checkbox"/> Black
Material	Aluminium
IP Rating	IP20
Lifespan	L80/50,000h
Warranty	5 Years

LED	
CCT	2700K/3000K/4000K
CRI	>90
UGR	<10

Electrical	
Mounting	Track mounted
Function	Casambi

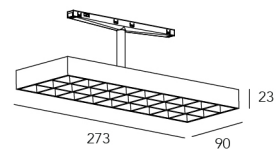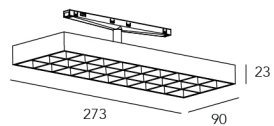

(long-stem for high profile tracks)

Technical data


	Size	Power	Lumens	Driver
1 Box 48V	90mm	15W	900lm	Phase cut (Build-in), DALI (Build-in)
2 Box-L 48V	90mm	15W	900lm	

General	
Finishes	<input type="checkbox"/> White
	<input checked="" type="checkbox"/> Black
Material	Aluminium
IP Rating	IP20
Lifespan	L80/50,000h
Warranty	5 Years


LED	
CCT	2700K/3000K/4000K
CRI	>90
UGR	<10

Electrical	
Mounting	Track mounted
Function	Casambi


1



2



(long-stem for high profile tracks)



L(m)	X(m)	X/2(m)
0,8	1	0,5

Box correct installation

Correct installation distances to achieve uniform lighting of the walls.
For installation criteria, refer to the instruction sheet




Technical data

	Size	Finishes	Insulation	Material	Warranty
❶ Low profile surface track	1000/2000/3000mm	Black/white	PC/PVC	Aluminium	5 years
❷ High profile surface/suspended track	1000/2000/3000mm	Black/white	PC/PVC	Aluminium	5 years
❸ Trimless recessed track	1000/2000/3000mm	Black/white	PC/PVC	Aluminium	5 years

1




Surface mounted 1000/2000/3000

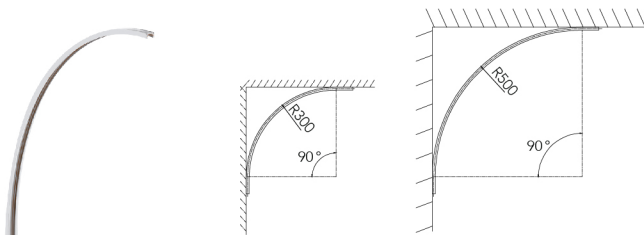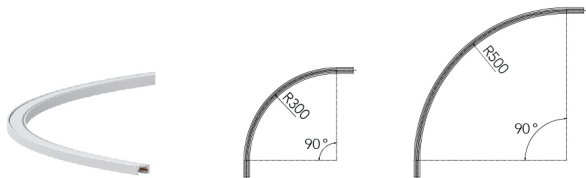

Accessories




Power Feed (No lead wire)



L Joint Ceiling-Wall



Power Feed (with lead wire)



Flexible Connector



I Joint



Track Cover (3m/roll)



L Joint





End Cap

2



Surface mounted/Pendant 1000/2000/3000




Accessories




Power Feed (with lead wire)




I Joint



Flexible Connector



L Joint



L Joint ceiling-wall




End Cap



Direct mechanical joint for connection between profiles




Track Cover



Suspension kit with cable L=2000



Surface-mounted power supply box with power cable






Power supply base with electric cable + suspension cable

3




Trimless recessed 1000/2000/3000



Accessories



Power Feed (with lead wire)




L Joint ceiling-wall



I Joint




End Cap



Flexible Connector



Direct mechanical joint for connection between profiles




L Joint



Track Cover

PURATI.

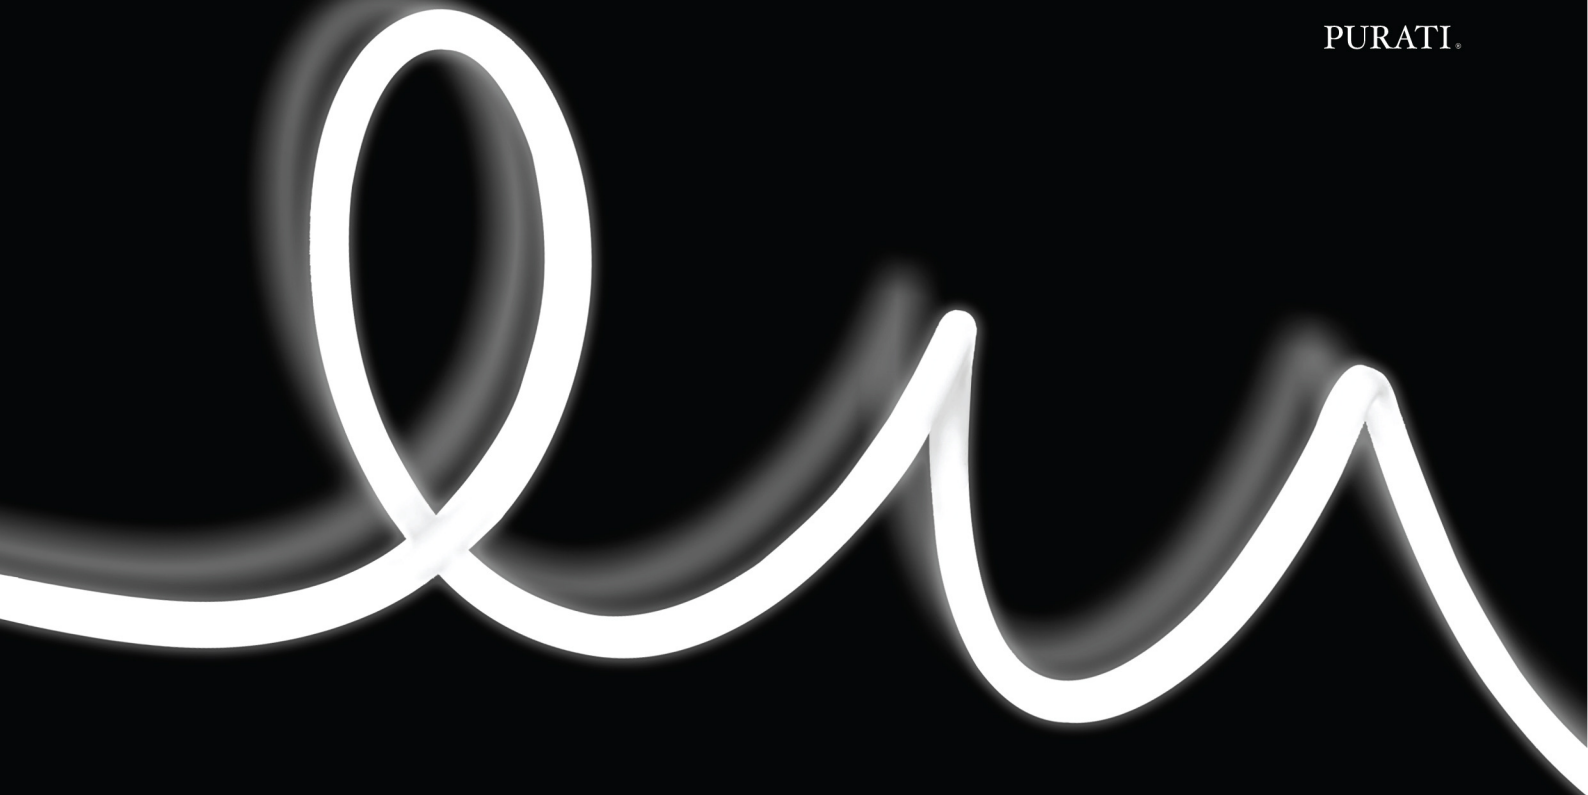

Unica Flex




Unica Flex


Offering maximum freedom in lighting design, incredible flexibility and 360° radiating light line.

Unica is a highly flexible neon tube rope made of the highest grade of silicone for creative and decorative lighting design. With a variety of accessories, it can be lined, curved, circled and styled at any shape that suits to your spatial and stylish needs.




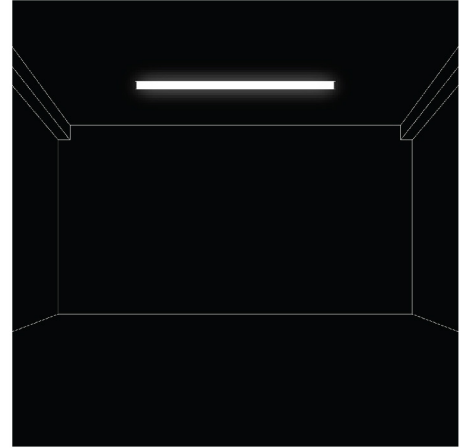


Unica Flex A

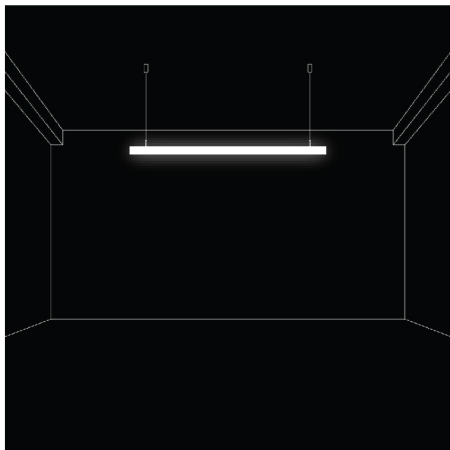


Unica Flex B

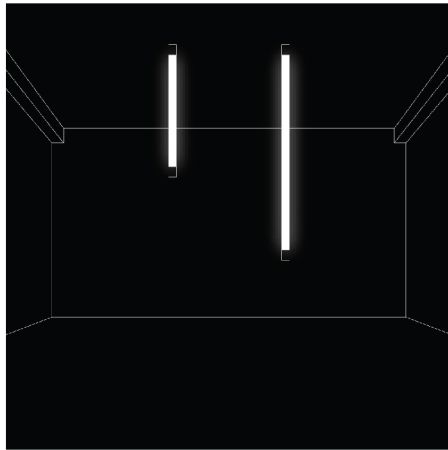


Unica Flex C

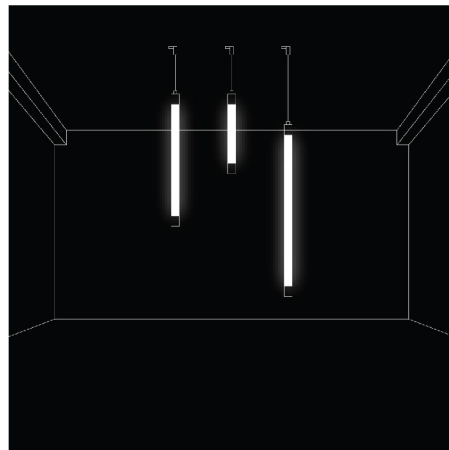


Unica Flex D

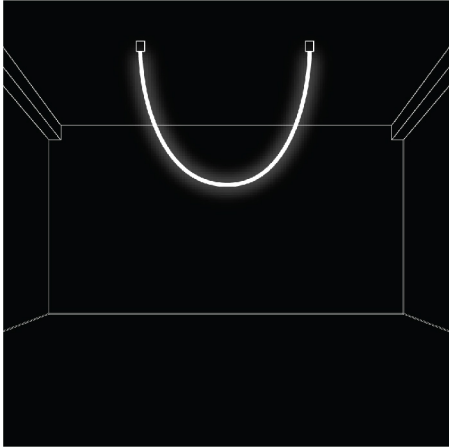

Unica Flex E

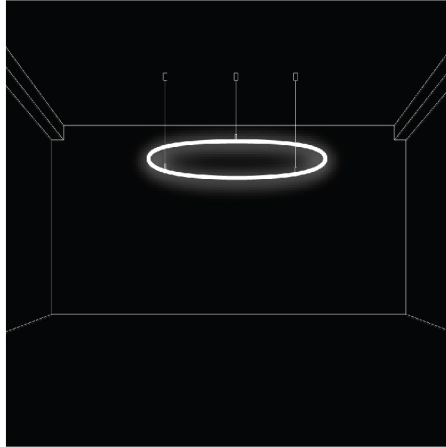

Unica Flex F

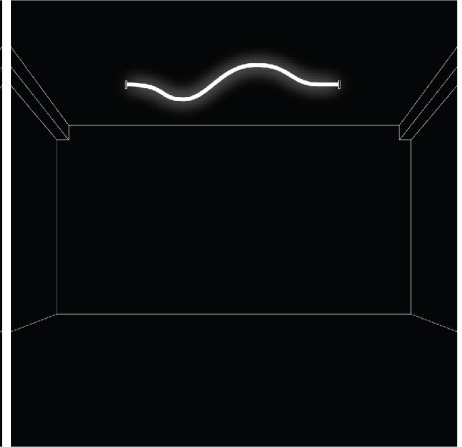

Unica Flex G




Technical data

- 1 Unica Flex A
- 2 Unica Flex B
- 3 Unica Flex C
- 4 Unica Flex D
- 5 Unica Flex E
- 6 Unica Flex F
- 7 Unica Flex G


Size	Power	CCT	CRI	Lumens	Beam Angle	Driver
1m	15W	2700K	>90	900lm	360°	ON/OFF, DALI
	15W	3000K	>90	975lm	360°	ON/OFF, DALI
	15W	4000K	>90	1050lm	360°	ON/OFF, DALI
5m	75W	2700K	>90	4500lm	360°	ON/OFF, DALI
	75W	3000K	>90	4875lm	360°	ON/OFF, DALI
	75W	4000K	>90	5250lm	360°	ON/OFF, DALI
10m	125W	2700K	>90	7500lm	360°	ON/OFF, DALI
	125W	3000K	>90	8126lm	360°	ON/OFF, DALI
	125W	4000K	>90	8750lm	360°	ON/OFF, DALI
20m	250W	2700K	>90	15000lm	360°	ON/OFF, DALI
	250W	3000K	>90	16250lm	360°	ON/OFF, DALI
	250W	4000K	>90	17500lm	360°	ON/OFF, DALI

General	
Finishes	<input type="checkbox"/> White <input type="checkbox"/> Black
Material	Silicone
IP Rating	IP65
Warranty	5 Years



Electrical	
Mounting	Surface mounted Wire suspension
Function	Casambi

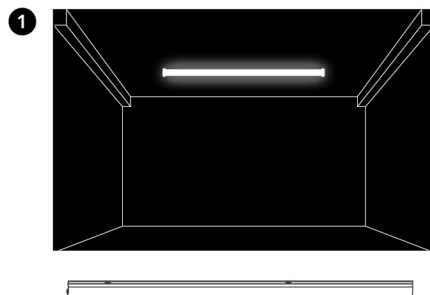


Accessories

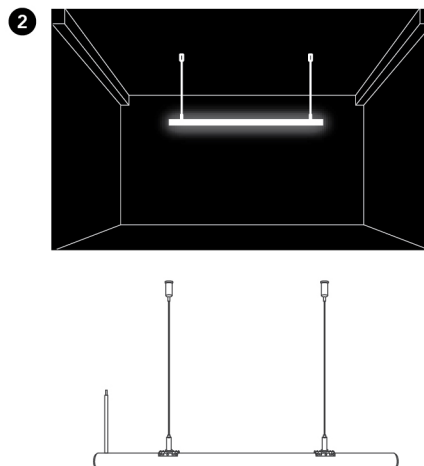



Accessories

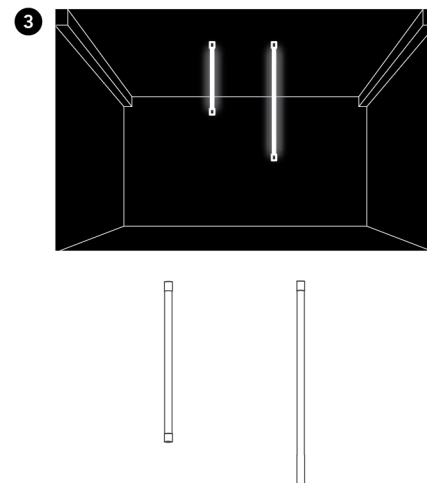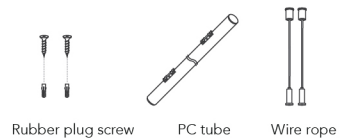

Accessories

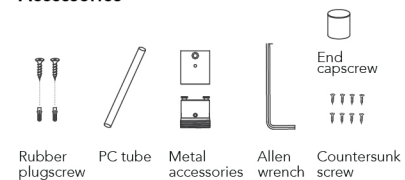

4

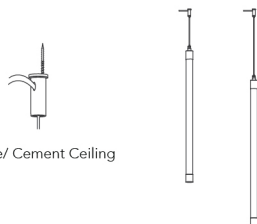
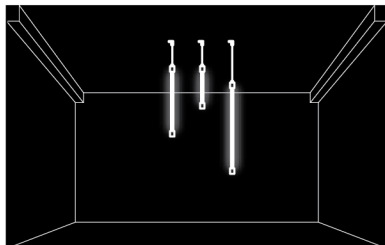


Side/ Cement Ceiling

Accessories



PC tube Rubber plug screw Countersunk screw Two-in-one wire screw

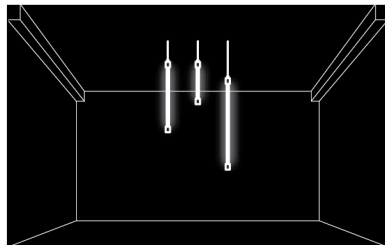


Top/ Suspended Ceiling

Accessories




PC tube Rubber plug screw Countersunk screw Two-in-one wire screw



5

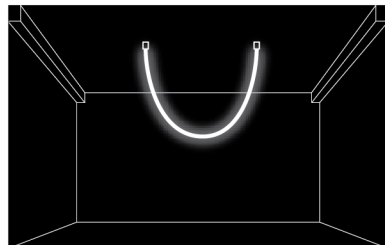




Accessories




Rubber plug screw Metal accessories Allen wrench Countersunk screw

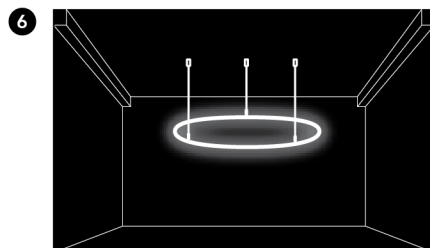

Accessories

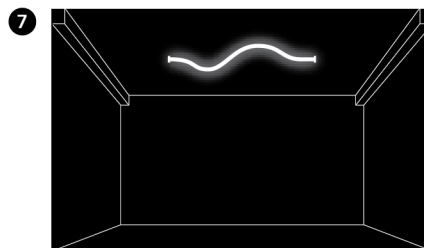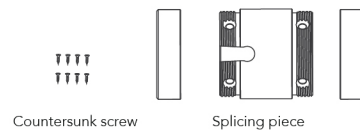

Accessories

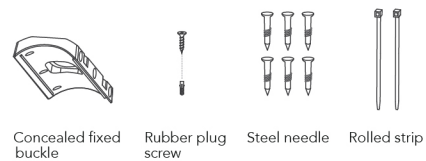

Head Office

Unit 10, 80 O'Riordan Street,
Alexandria NSW 2015

Phone

+61 2 8065 8181

Email

sales@purati.com



www.purati.com