

PURATI®



STORM

PURATI

Design

n p k | design

PURATI®

Production

The close collaboration between
Purati and npk design. Together,
our mission is to create the
great products & bring new
lighting solutions for architecture.





npk design b.v.

Our designs are made by npk design b.v. is an award-winning design agency which has developed a wide range of successfully products for us more than 10 years.

From Slice series to Fusi series, has been gaining prestigious international design awards such as IF Design Award, Red Dot Award, German Design Award.





Purati

Performance, Uniqueness, Responsibility, Aesthetics, Technology, Innovation (PURATI). Those are our core value and foundation.

Our lights save space, save resources, and offer greater quality.

We offer architectural lighting of premium quality and performance and with unique design.



PURATI

6

PURATI

PURATI



npk design
Leiden,
The' Netherlands




PURATI

Purati
Manufacturing Plant
Ningbo, China

PURATI

Purati HQ
Sydney, Australia

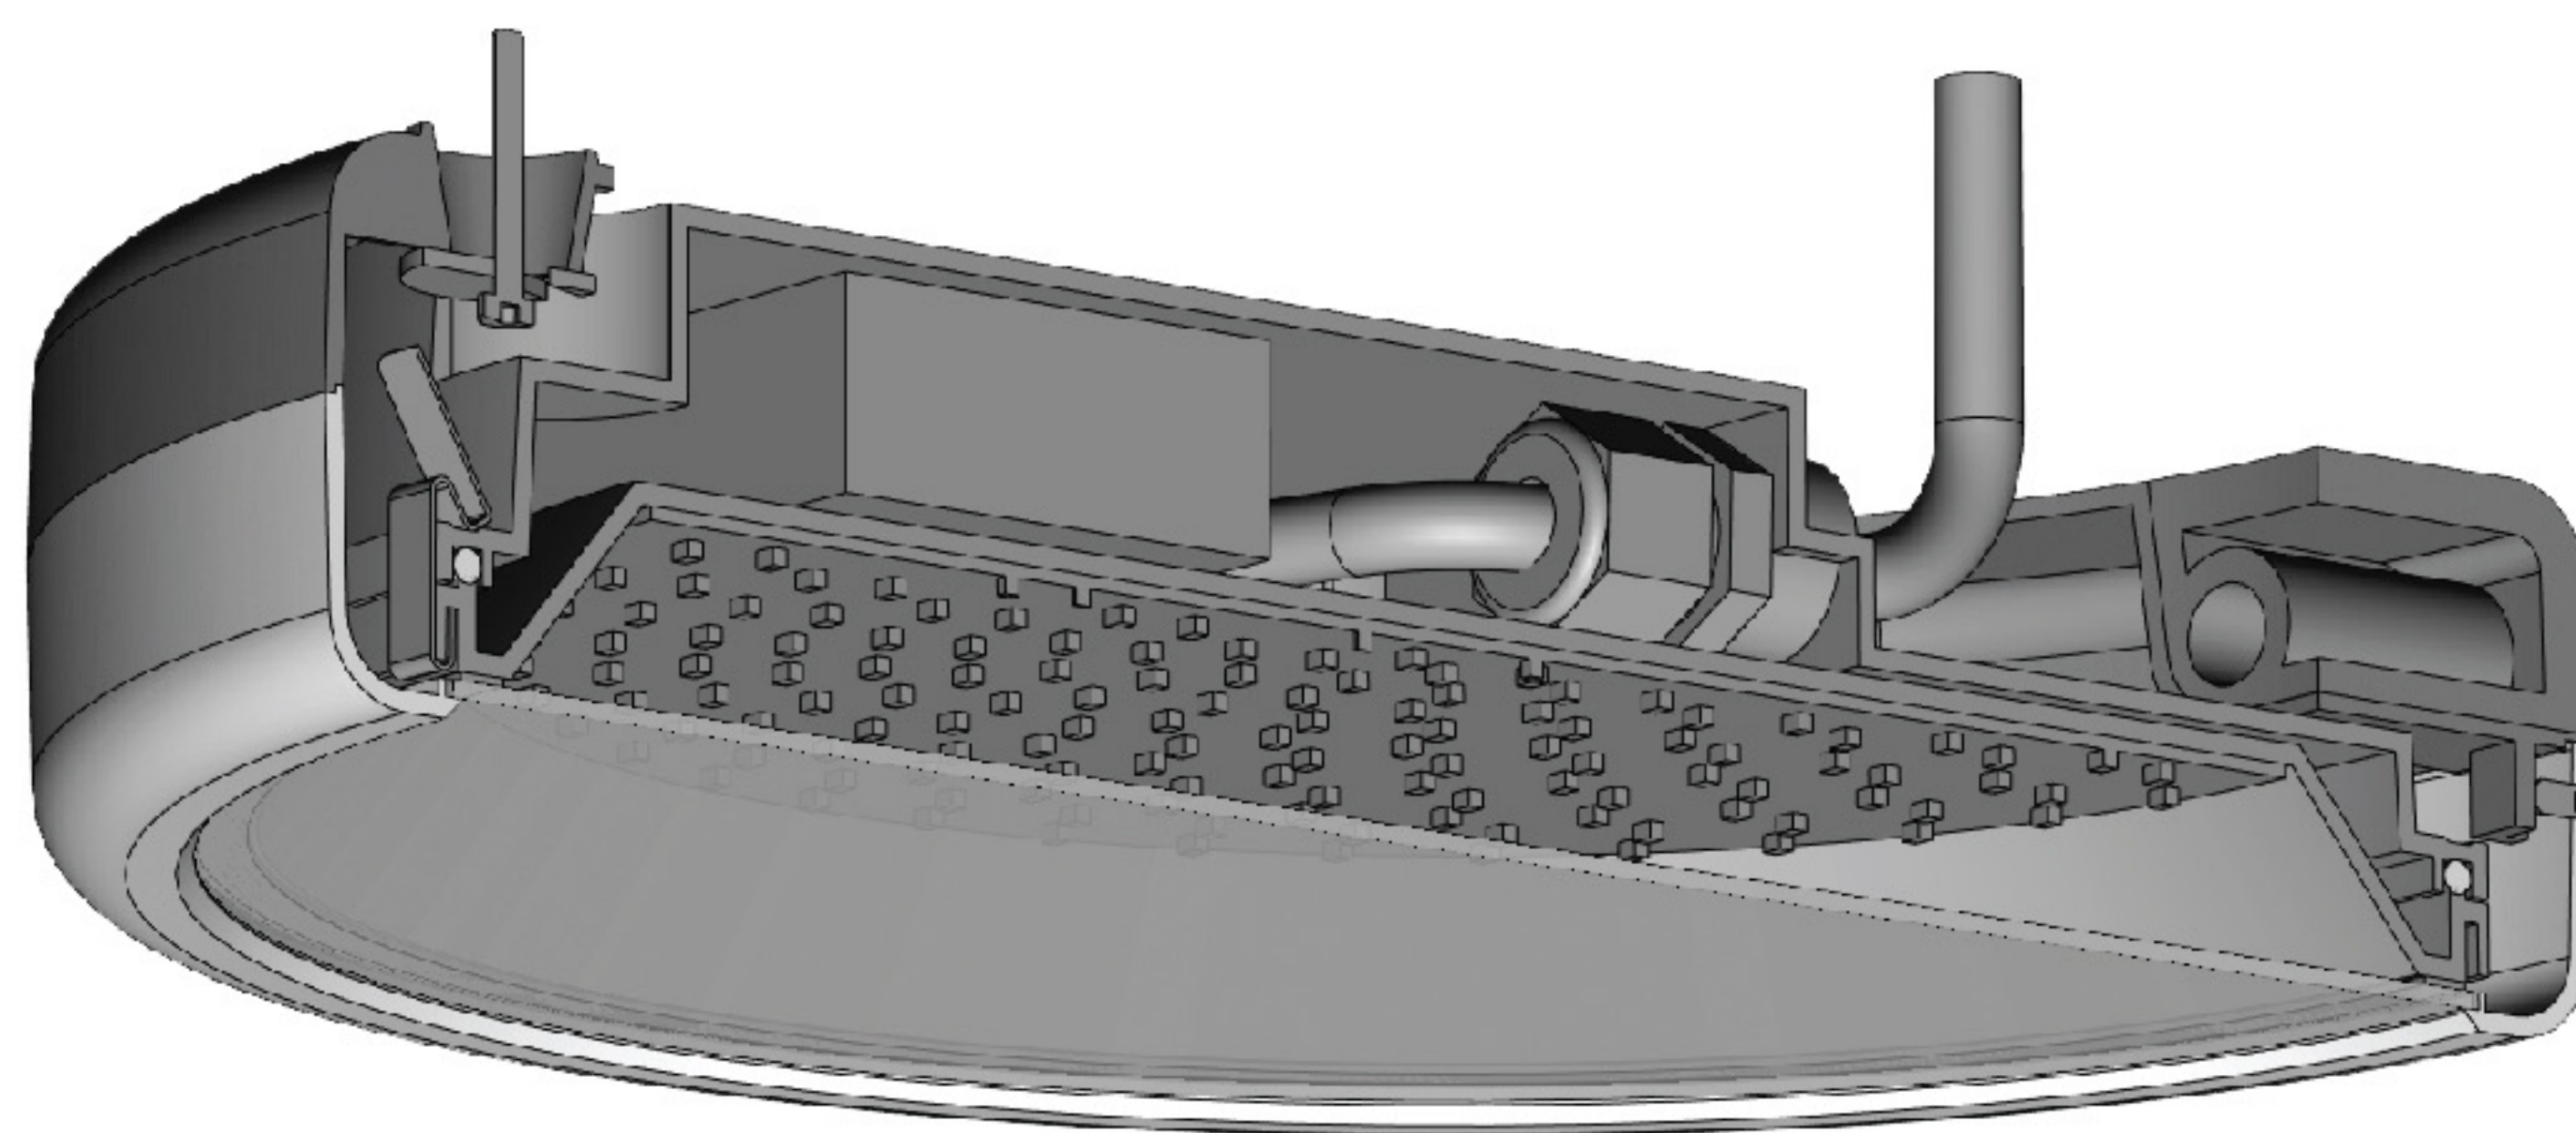

STORM


Designed by npk design b.v.

**A good choice for ceiling and wall
in outdoor areas**

The Storm is a strong outdoor luminaire featuring robust, durable, long-lasting used for tough environments. A complete range of fixtures with its installation versatility and functionality for architectural exterior lighting.



The initial design

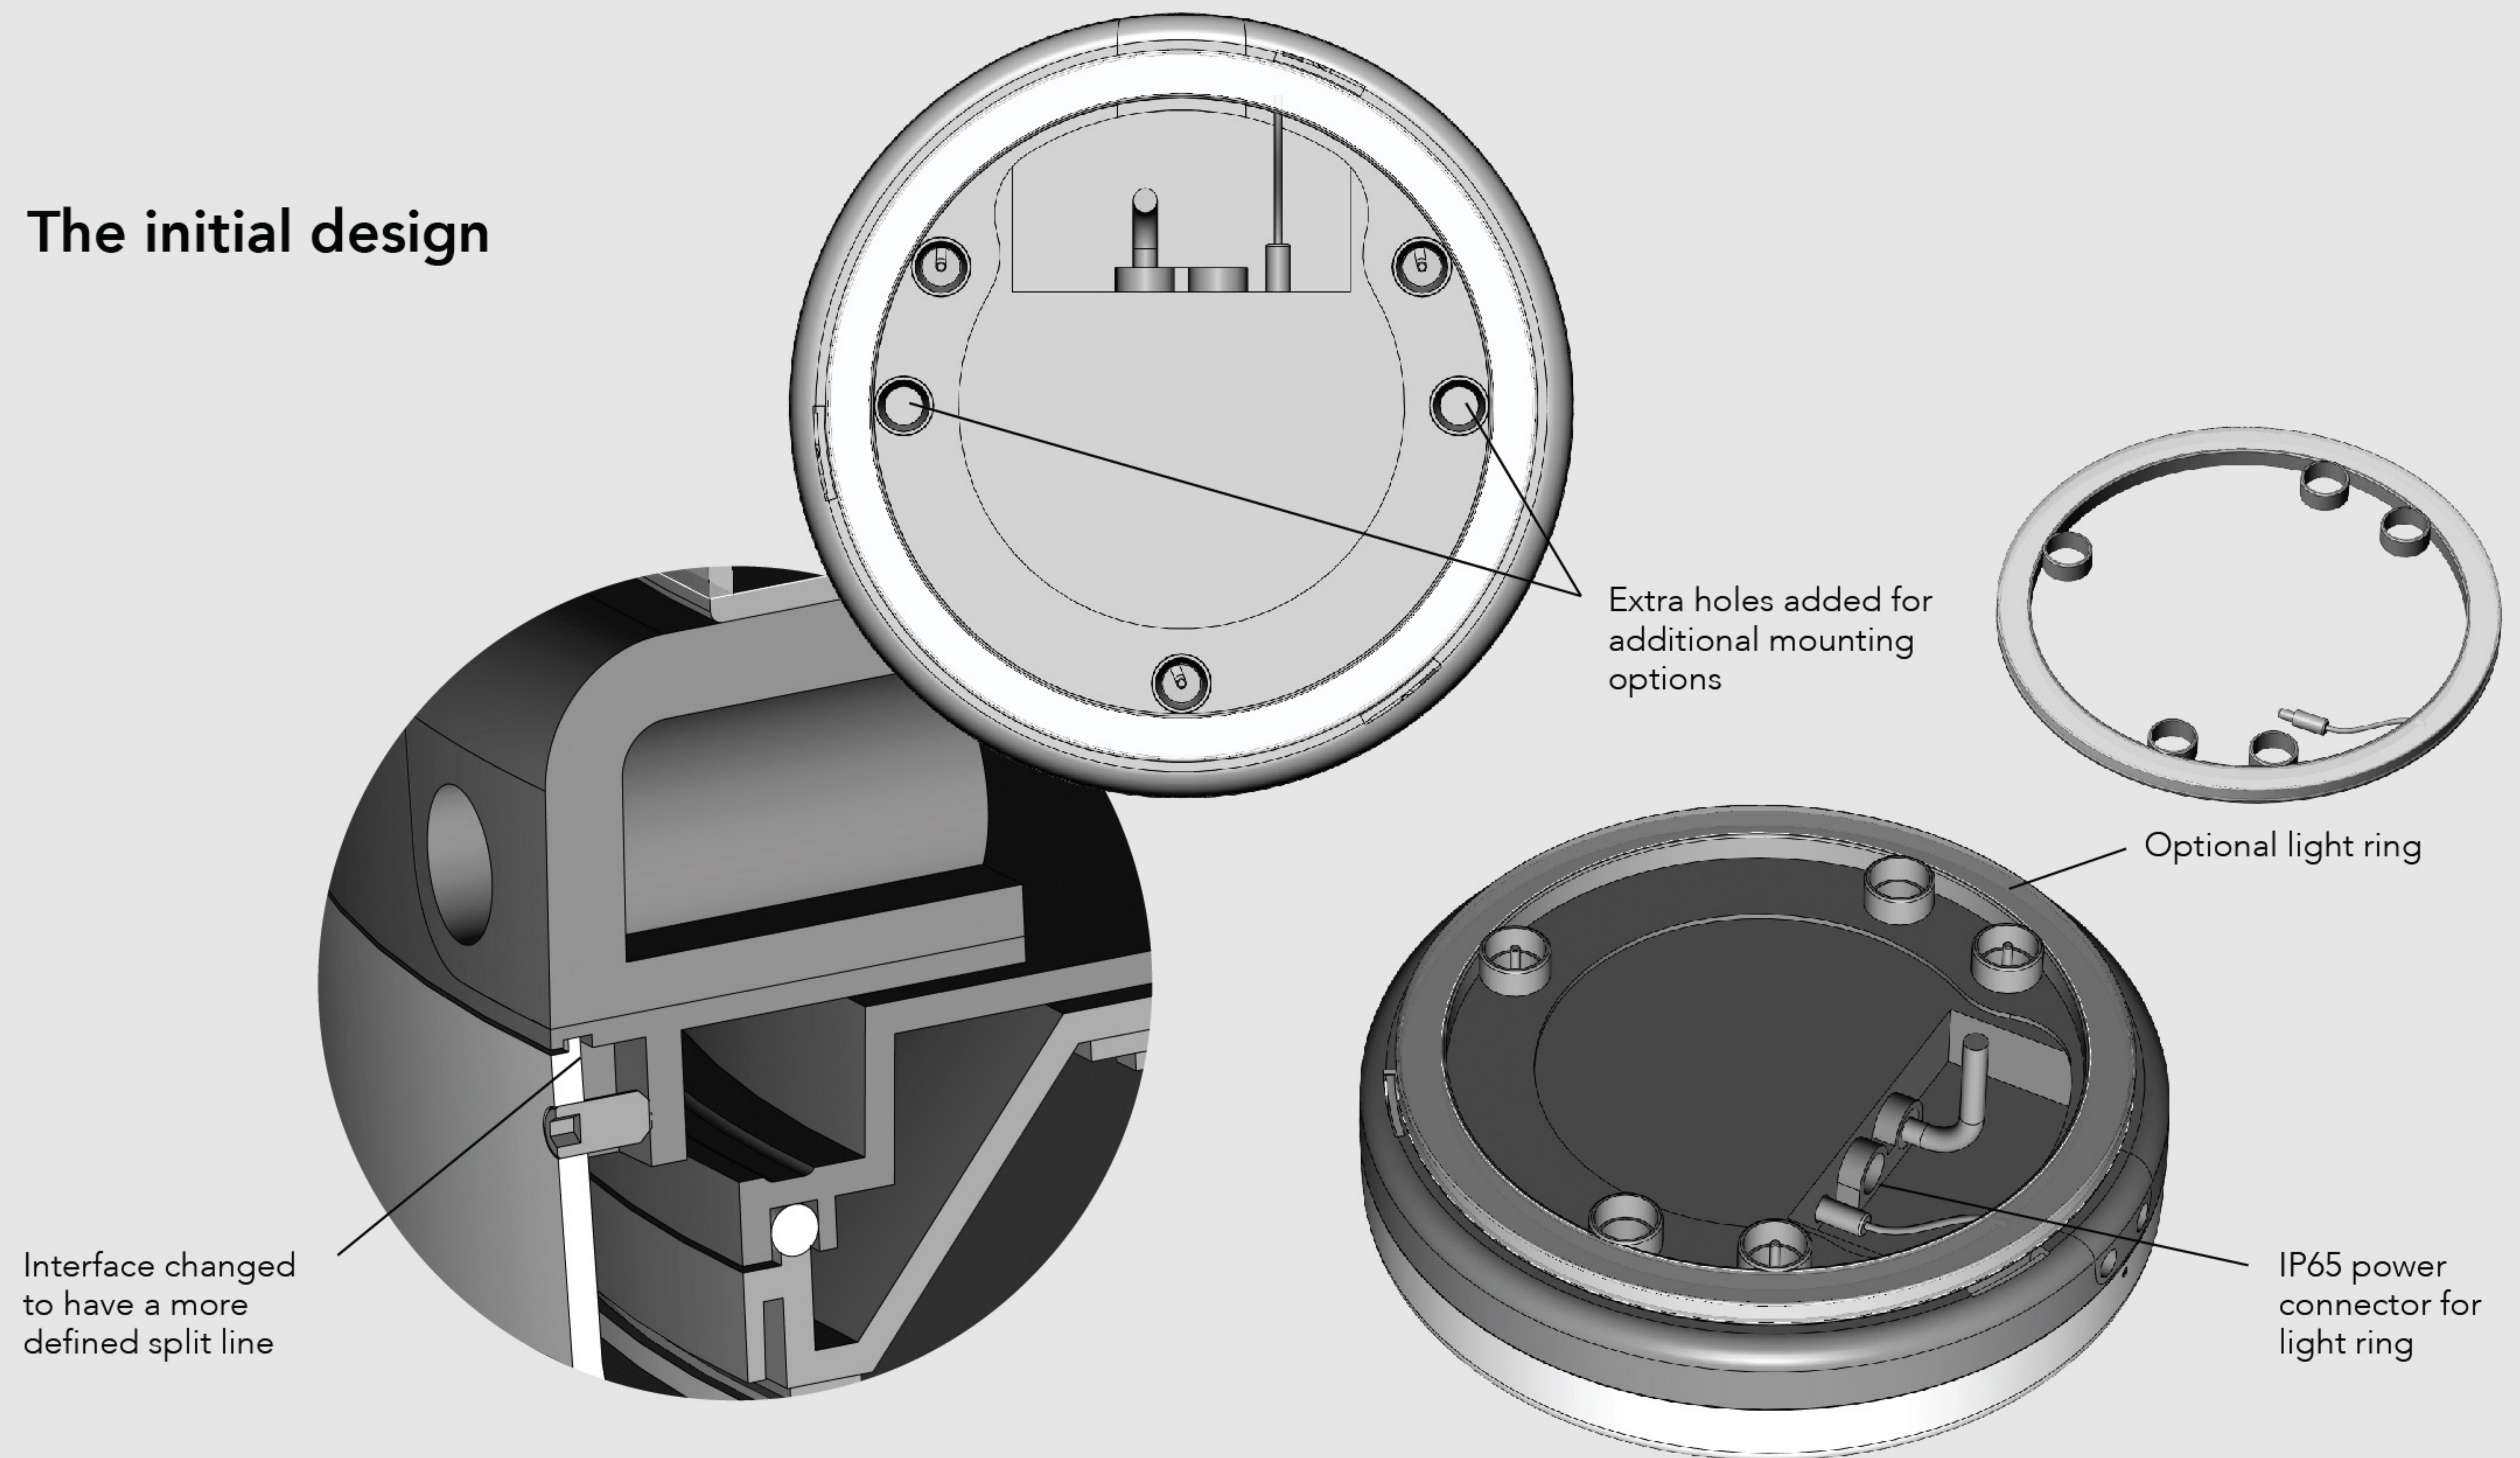



Optional light ring

Extra light ring added for additional indirect lighting options.



Explore the essence of Storm IP65 series

Designed for durability

High grade aluminium and pre-treated before powder coating ensuing high corrosion resistance, IP65 rating protection against dust and jets of water from all directions.

European design

Flat Slim put, beautifully robust, ease installation. With its classic round design and modern lighting options, Storm IP65 series is a multi-talent for general lighting and accent lighting.



Functionality options


Open face and eyelid variations
with PIR sensor or Emergency
light (on request).







Multiply lumen
and color




Lumen and color
temperature switchable
by using the switch in
the installation

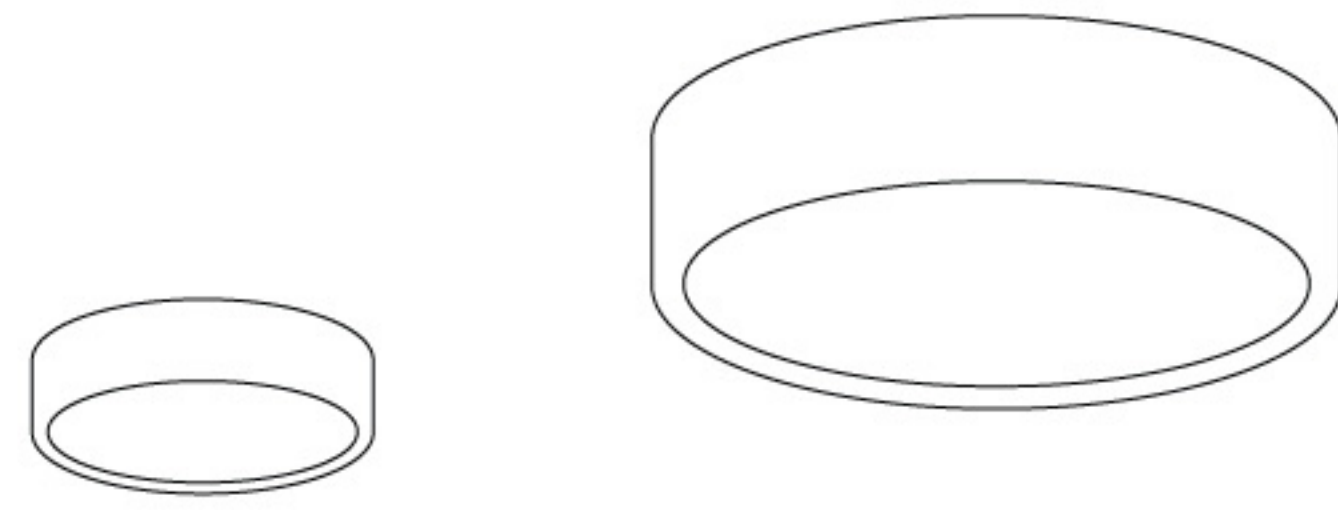

Areas of application

Multi-Residential
Commercial building
Education
Industrial outdoor areas
Public space

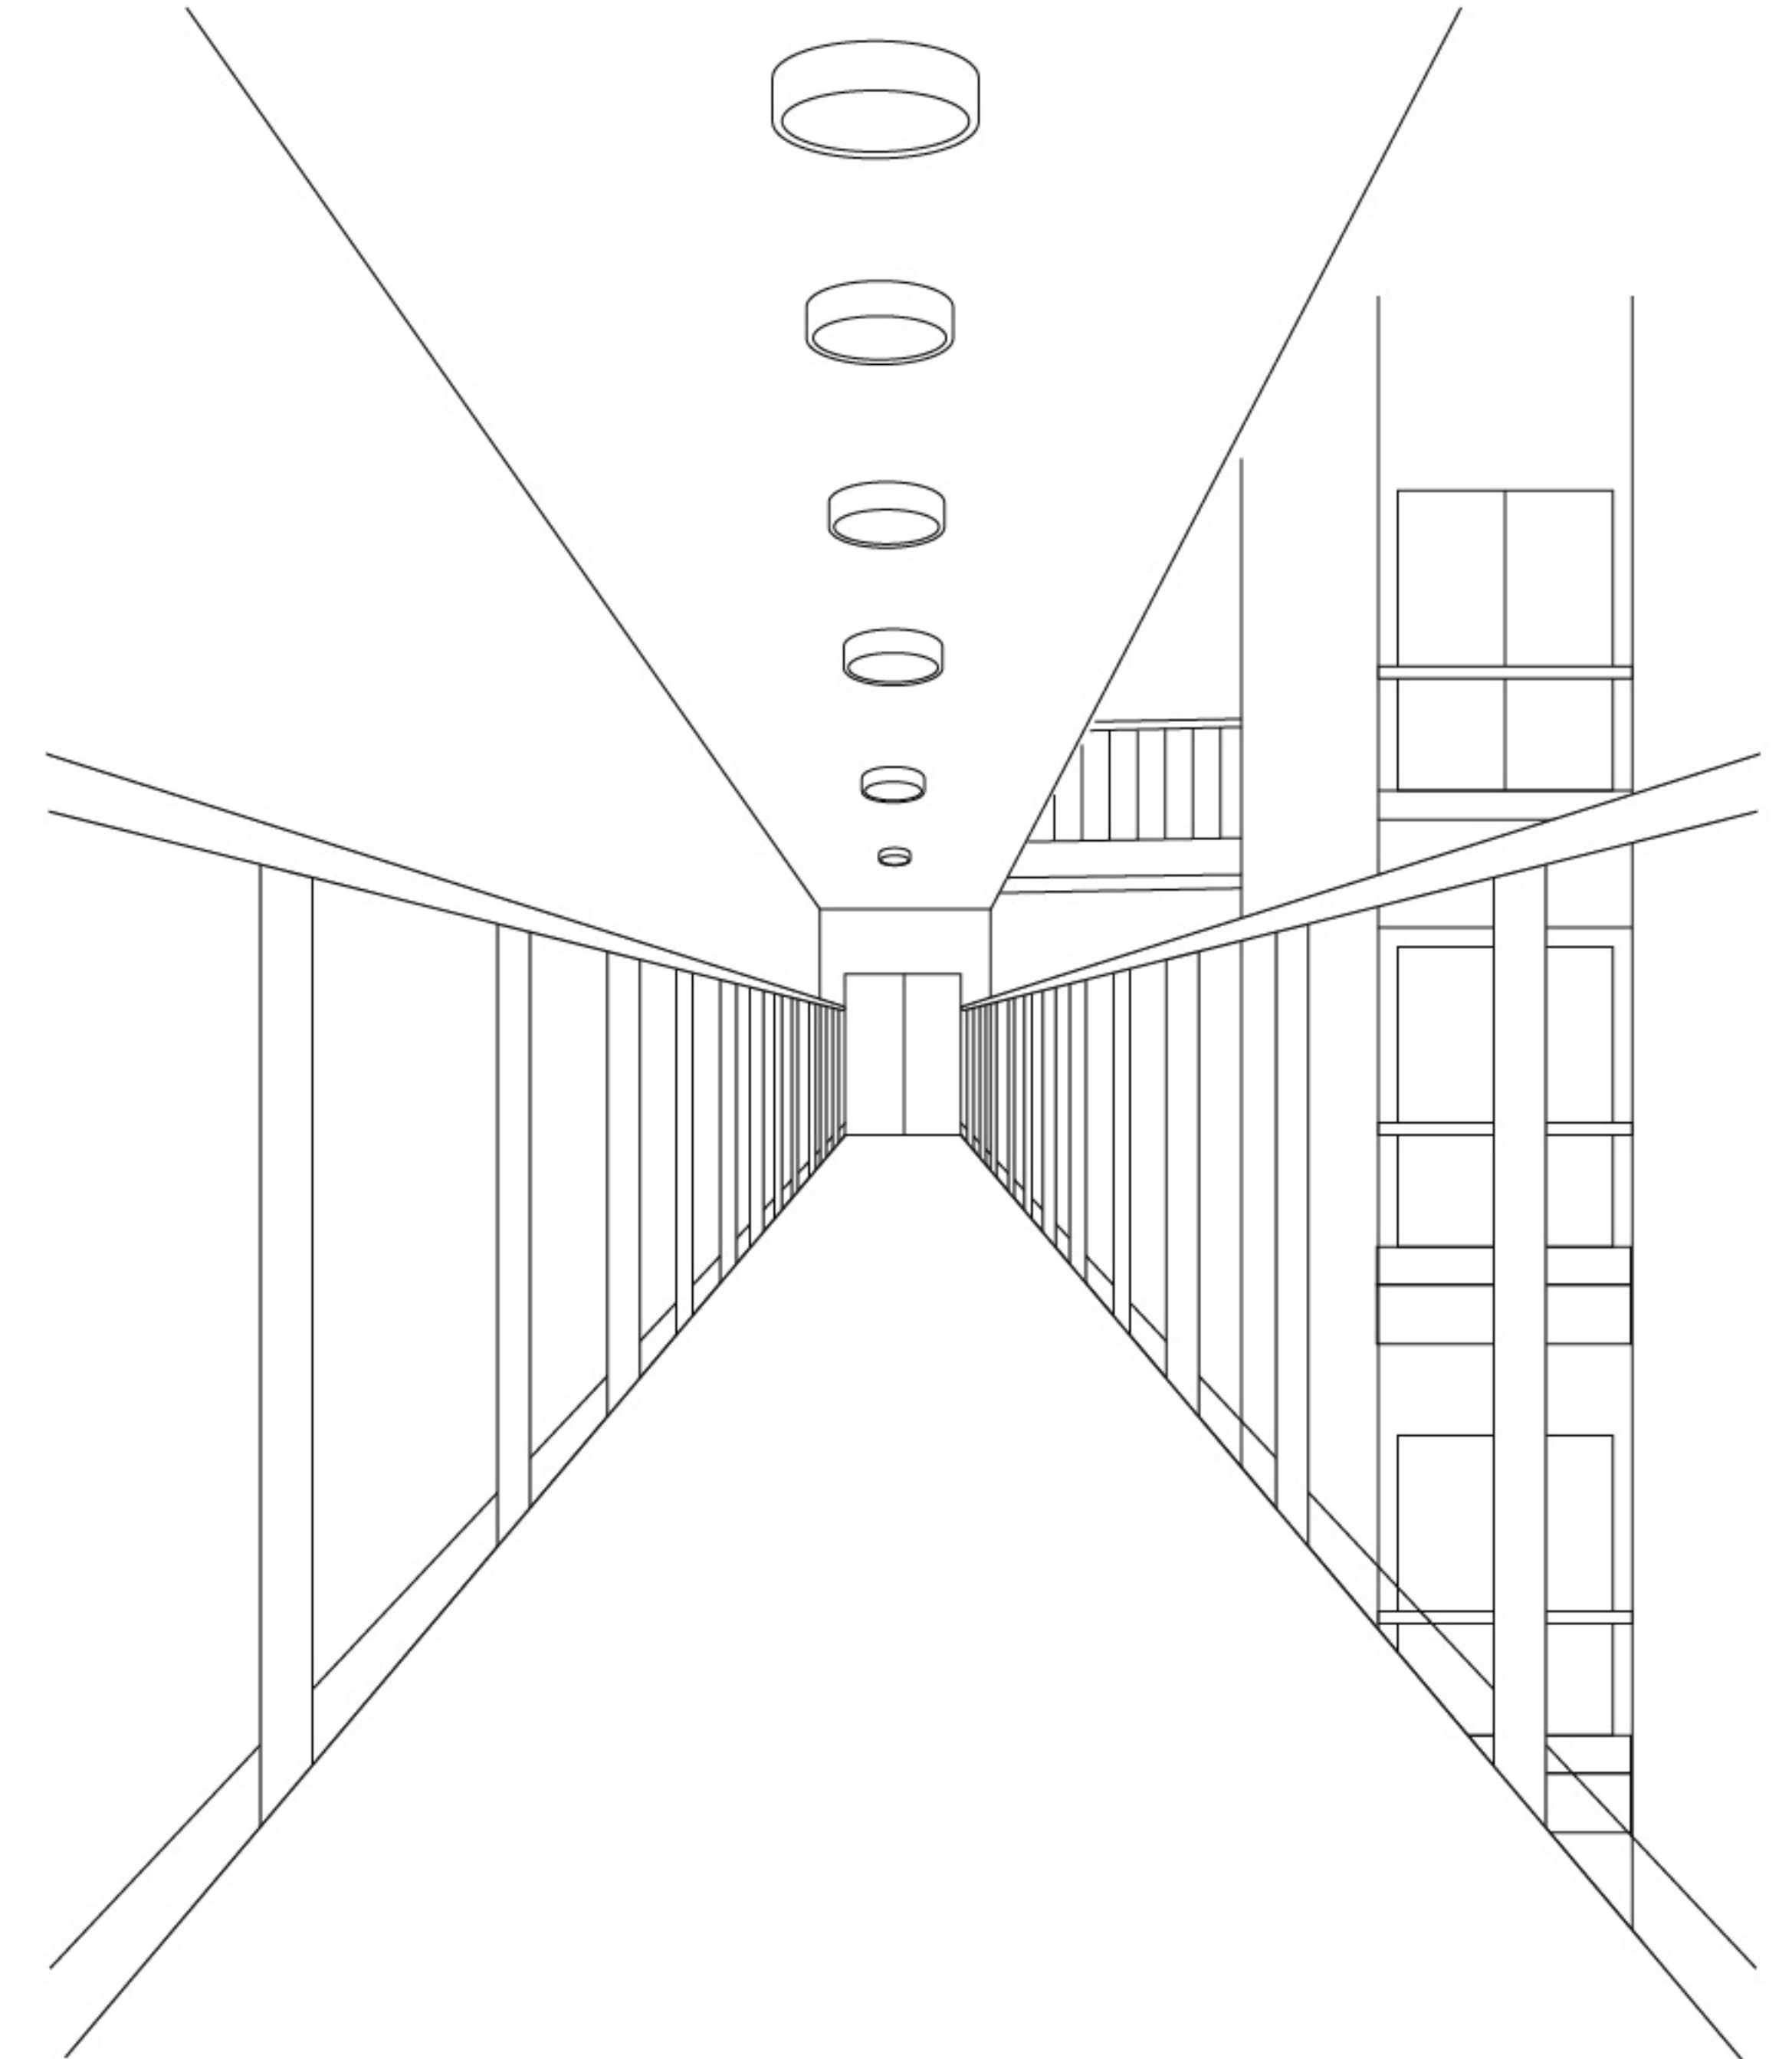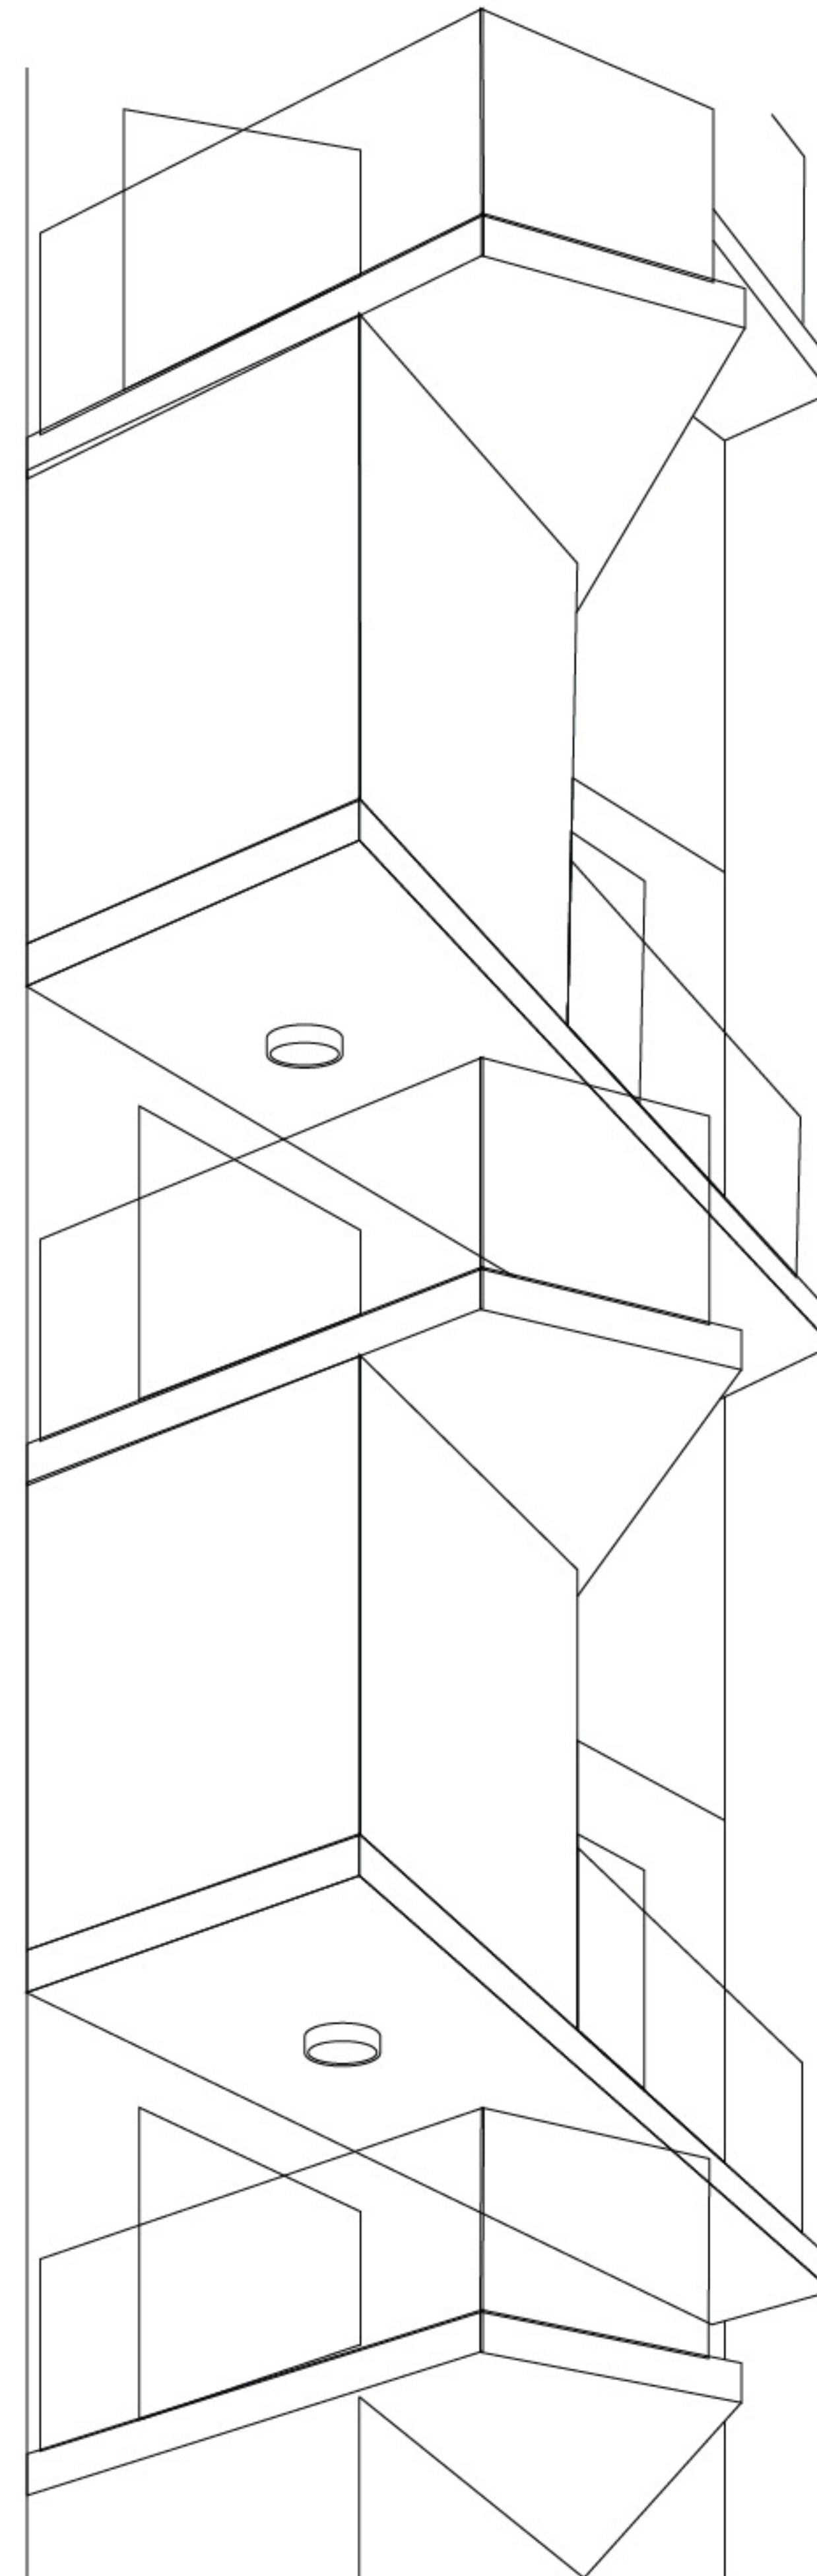

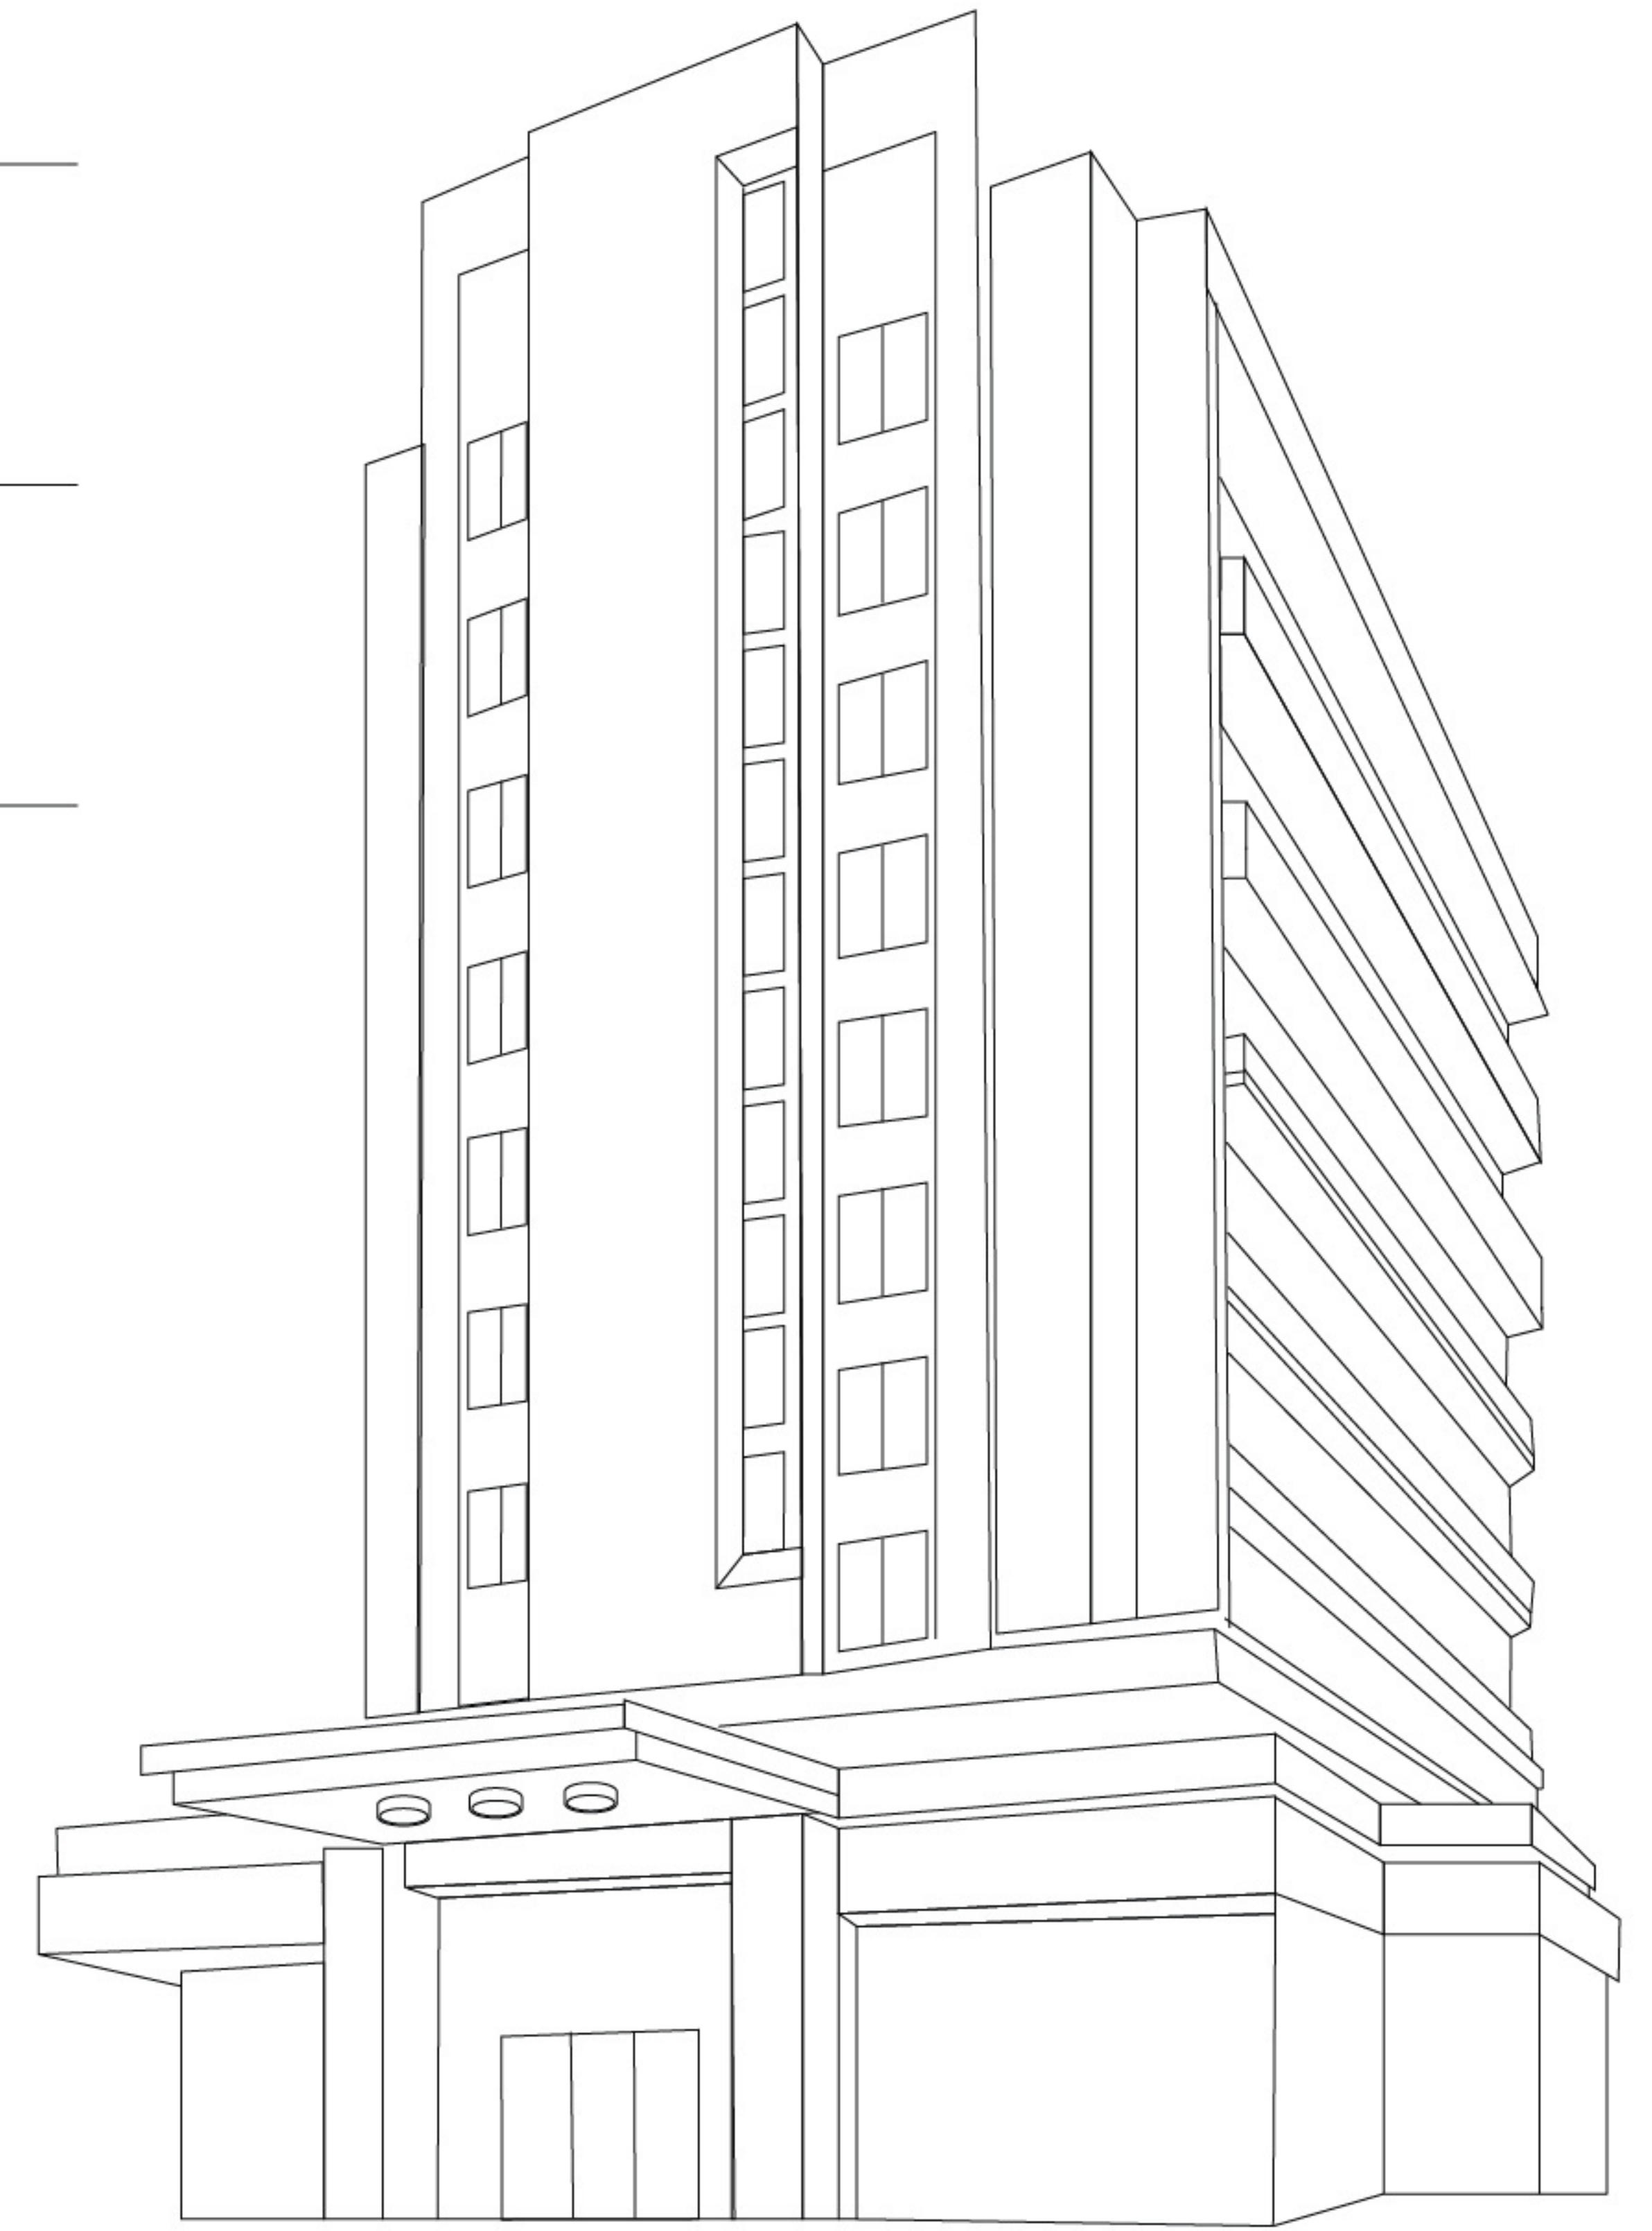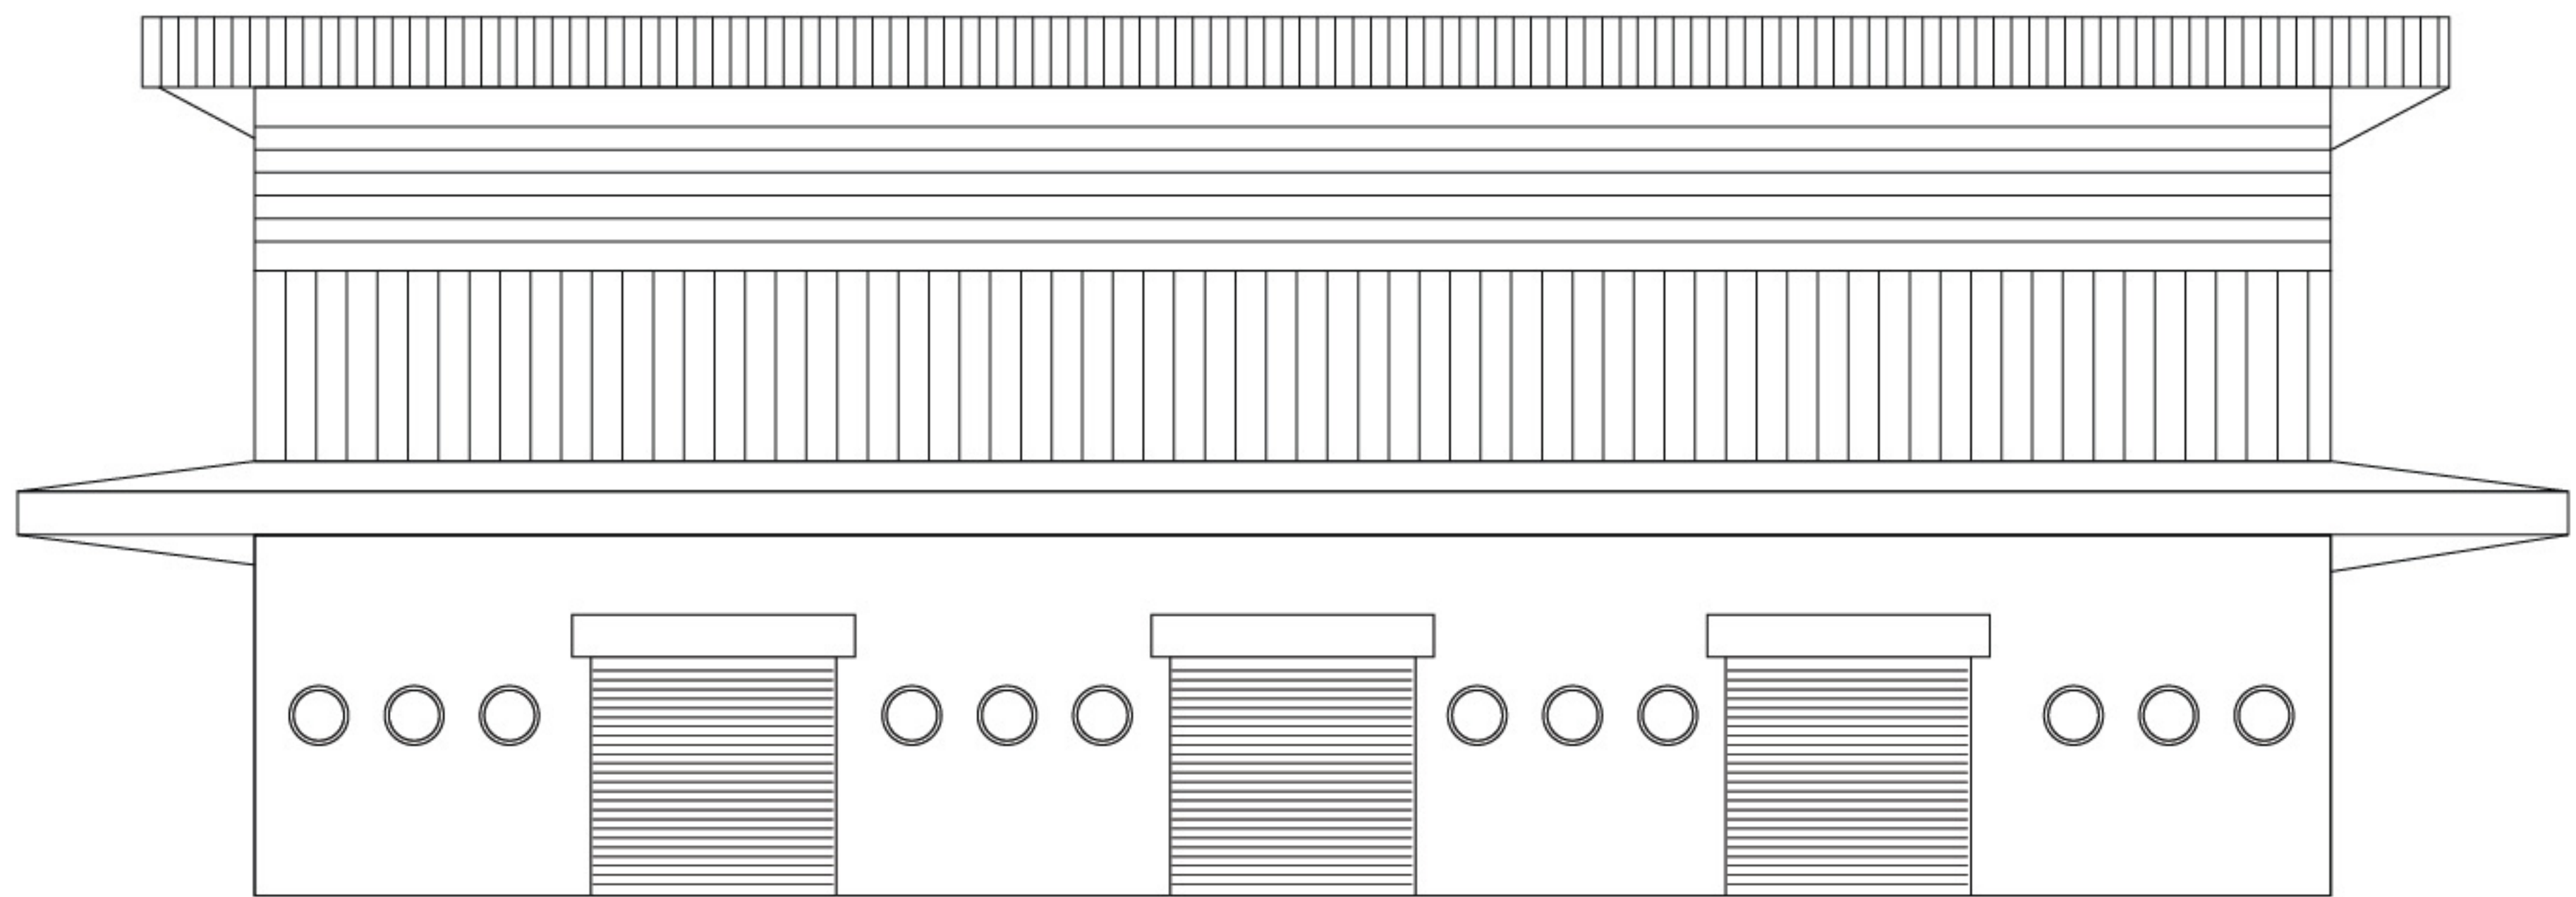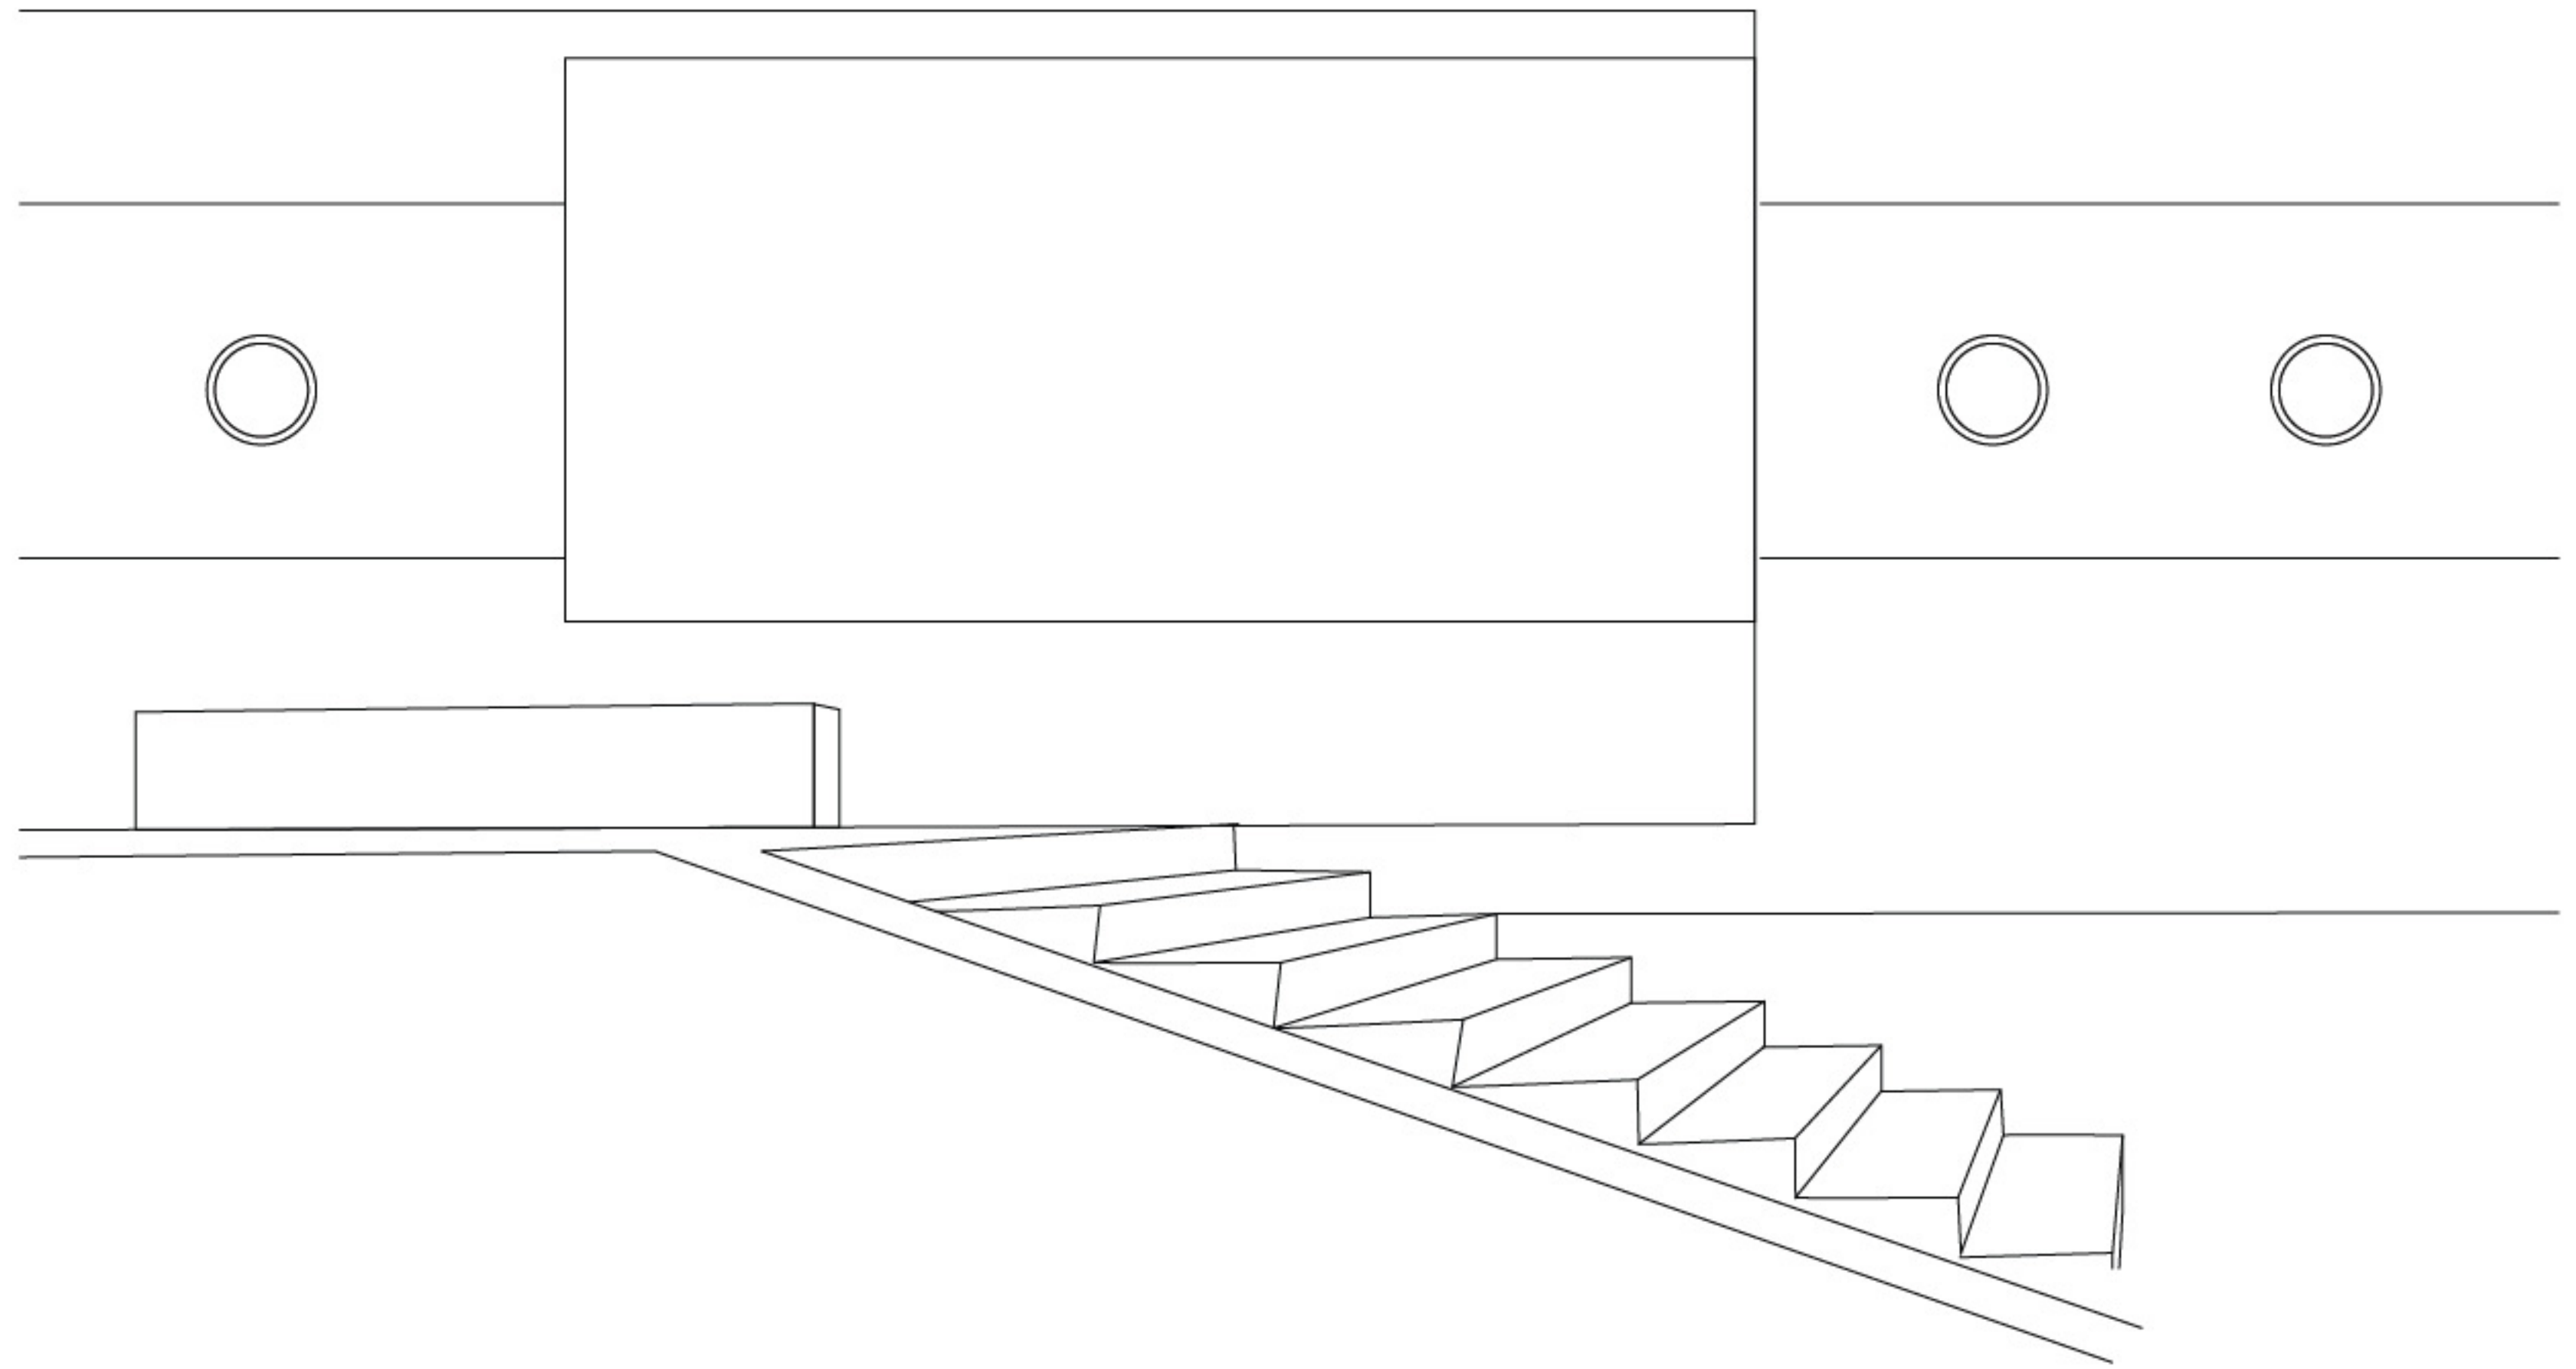

Technical data

	Size	Power	Lumens	Beam Angle	Efficacy	Driver
1 Storm 325	325mm	24/18/10W	2700/2050/1100lm	110°	110lm/W	Phase cut (Build-in), DALI (Build-in),
2 Storm 325 glare guard	325mm	24/18/10W	2700/2050/1100lm	110°	110lm/W	
3 Storm 325 sensor	325mm	24/18/10W	2700/2050/1100lm	110°	110lm/W	
4 Storm 325 glare guard sensor	325mm	24/18/10W	2700/2050/1100lm	110°	110lm/W	

General

Finishes ☐ White
☒ Black

Material Die-cast Aluminium +PC

IP Rating IP65

IK Rating IK10

Lifespan L80/50,000h

Warranty 5 Years

LED

CCT 3000K/4000K

CRI >90

SDCM <3

UGR <22


Electrical

Light distribution Direct and indirect lighting optional

Mounting Surface mounted
Wall mounted



Function PIR sensor
Emergency (2W 90mins/180mins Lithium cell)

1

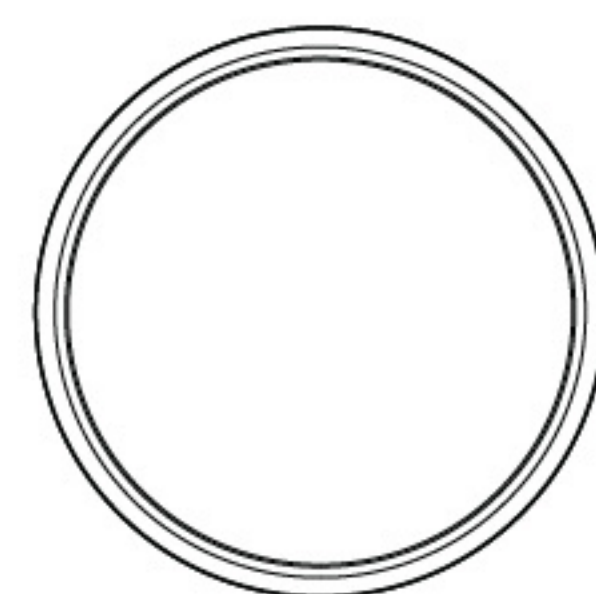


Ø 325

3

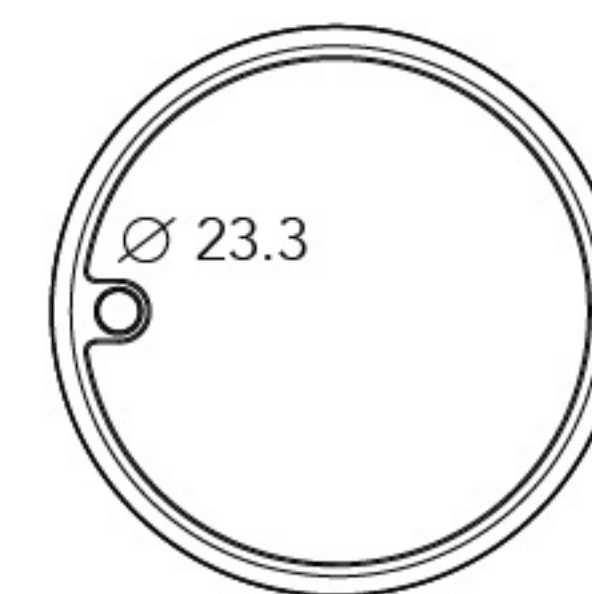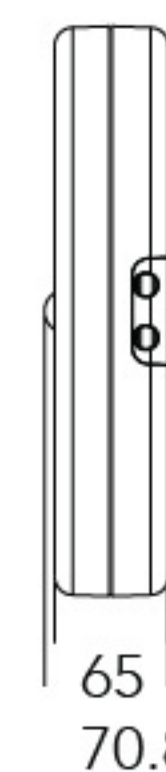


Ø 325

2

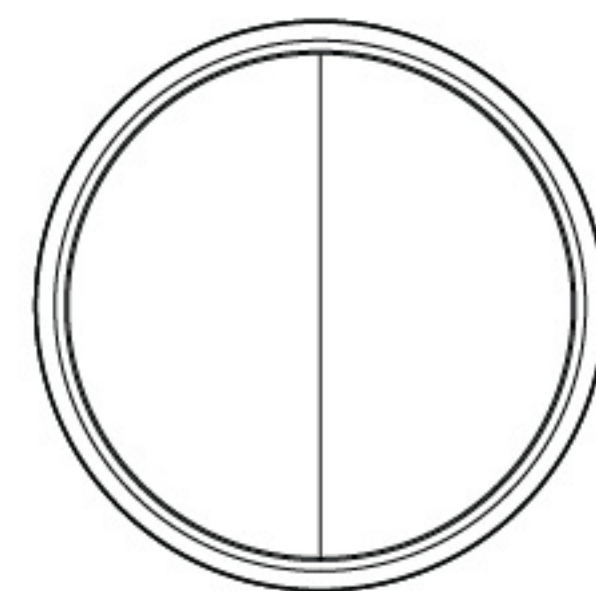

Ø 325

4

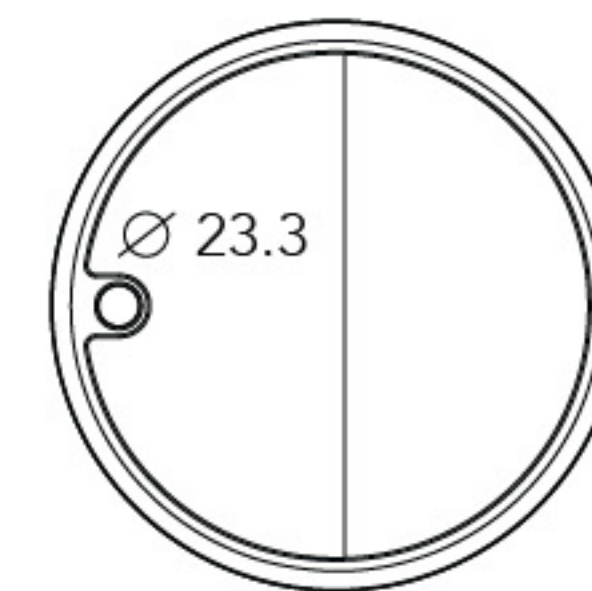

Ø 325

Head Office

Unit 10, 80 O'Riordan Street,
Alexandria NSW 2015

Phone

+61 2 8065 8181

Email

sales@purati.com



www.purati.com