


STORM

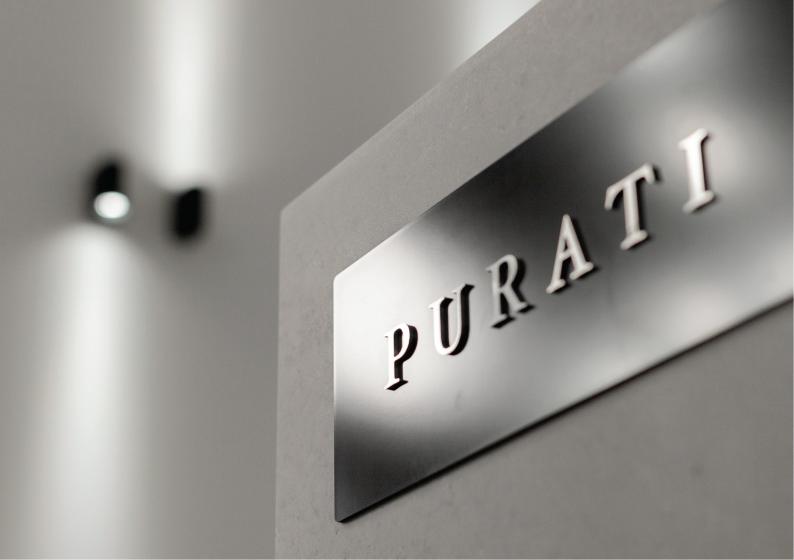

Design n p k | design

PURATI.

Production

Purati and npk design. Together, our mission is to create the great products & bring new lighting solutions for architecture.

The close collaboration between







npk design b.v.

Our designs are made by npk design b.v. is an award-winning design agency which has developed a wide range of successfully products for us more than 10 years.

From Slice series to Fusi series, has been gaining prestigious international design awards such as IF Design Award, Red Dot Award, German Design Award.





Purati


Performance, Uniqueness, Responsibility, Aesthetics, Technology, Innovation (PURATI). Those are our core value and foundation.

Our lights save space, save resources, and offer greater quality.

We offer architectural lighting of premium quality and performance and with unique design.





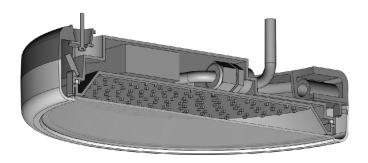


STORM

Designed by npk design b.v. A good choice for ceiling and wall in outdoor areas

The Storm is a strong outdoor luminaire featuring robust, durable, long-lasting used for tough environments. A complete range of fixtures with its installation versatility and functionality for architectural exterior lighting.



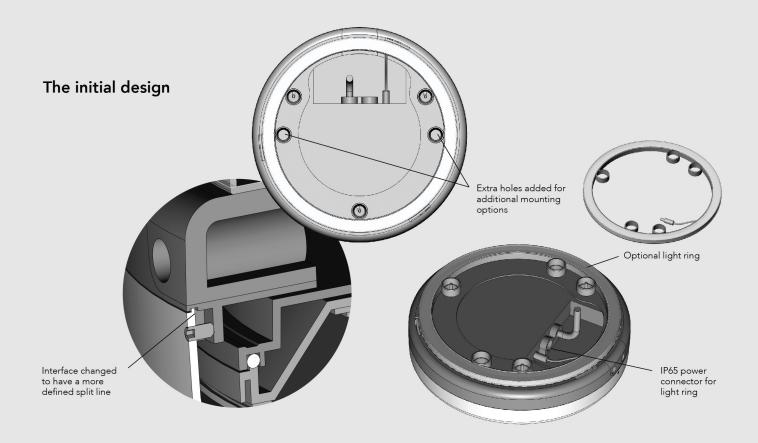




Explore the essence of Storm IP65 series

Designed for durability

High grade aluminium and pre-treated before powder coating ensuing high corrosion resistance, IP65 rating protection against dust and jets of water from all directions.

European design

Flat Slim put, beautifully robust, ease installation. With its classic round design and modern lighting options, Storm IP65 series is a multi-talent for general lighting and accent lighting.







Optional light ring


Extra light ring added for additional indirect lighting options.






Areas of application

Multi-Residential Commercial building Education Industrial outdoor areas Public space

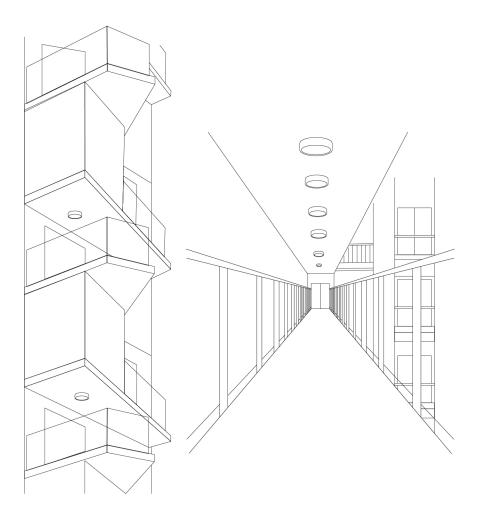

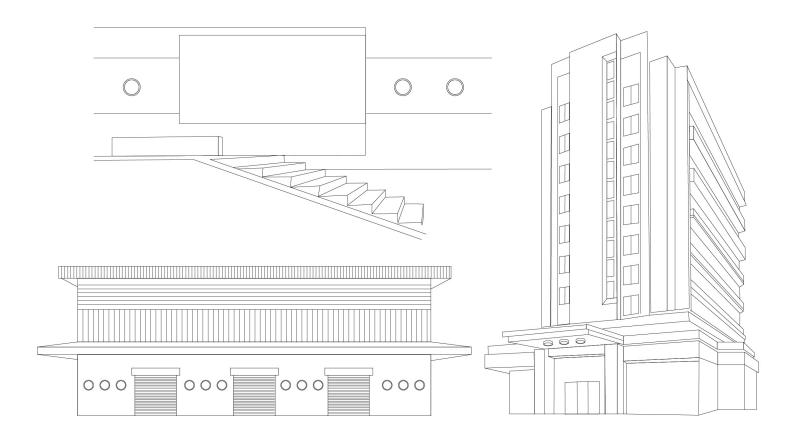


Technical data

	Size	Power	Lumens	Beam Angle	Efficacy	Driver
1 Storm 325	325mm	24/18/10W	2700/2050/1100lm	110°	110lm/W	Phase cut (Build-in),
2 Storm 325 glare guard	325mm	24/18/10W	2700/2050/1100lm	110°	110lm/W	DALI (Build-in),
3 Storm 325 sensor	325mm	24/18/10W	2700/2050/1100lm	110°	110lm/W	
4 Storm 325 glare guard sensor	325mm	24/18/10W	2700/2050/1100lm	110°	110lm/W	

General	
inishes	☐ White Black
Material	Die-cast Aluminium +PC
P Rating	IP65
K Rating	IK10
_ifespan	L80/50,000h
Narranty	5 Years

LED	
ССТ	3000K/4000K
CRI	>90
SDCM	<3
UGR	<22

Electrical	
Light distribution	Direct and indirect lighting optional
Mounting	Surface mounted Wall mounted
Function	PIR sensor Emergency (2W 90mins/180mins Lithium cell)

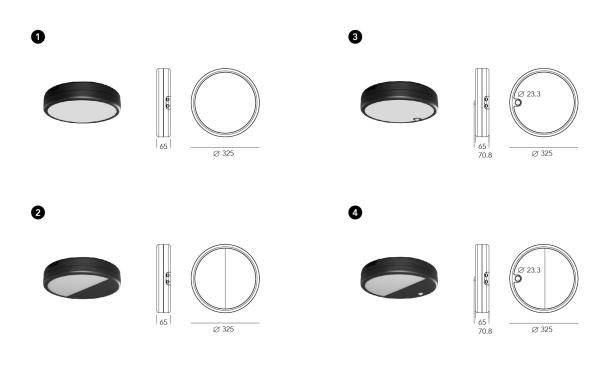

Head Office

Unit 10, 80 O'Riordan Street, Alexandria NSW 2015

Phone

+61 2 8065 8181

Email

sales@purati.com









