


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:229.49V I:0.1705A P:38.381W PF:0.9811 Freq:50.00Hz Lamp Flux:3931.13x1 lm		
NAME: Verso 1500 40W WW	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 102.42 lm/W
MODEL		Imax(cd)	1694	S/MH(C0/180)	1.20	
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	1.40	
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	3931.1	η UP,DN(C0-180)	0.3,48.5	
NOMINAL FLUX(lm)	3931.13	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.3,50.9	
LAMPS INSIDE	1	η up(%)	0.6	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	229.3	η down(%)	99.4	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

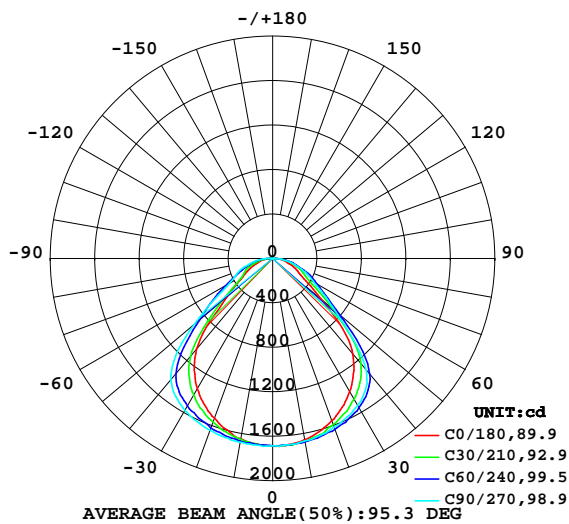

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

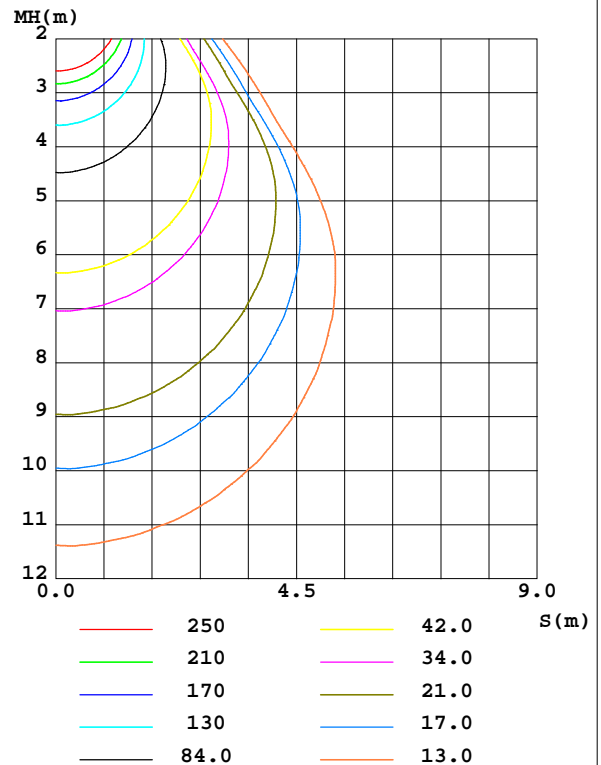

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Mr.Ma
Test Date:26 February 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.700m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM
ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1655	1673	1668	1646	1646	1661	1678	1669	0- 10	159.9	159.9	4.07,4.07
20	1554	1613	1615	1542	1531	1596	1645	1589	10- 20	460.6	620.5	15.8,15.8
30	1387	1508	1529	1375	1356	1477	1579	1453	20- 30	704.7	1325	33.7,33.7
40	1123	1298	1310	1065	1066	1252	1426	1234	30- 40	846.6	2172	55.2,55.2
50	568.3	744.2	732.8	527.9	533.6	729.5	919.2	714.8	40- 50	739.3	2911	74.1,74.1
60	283.8	410.0	431.7	307.6	293.4	402.3	450.4	362.0	50- 60	446.5	3358	85.4,85.4
70	181.9	266.0	269.9	194.1	176.7	255.3	312.5	236.7	60- 70	297.8	3656	93,93
80	101.0	139.9	127.9	90.77	94.55	138.3	167.7	131.7	70- 80	187.2	3843	97.8,97.8
90	0.6578	0.9885	0.8901	0.6623	0.7502	0.9197	13.64	12.27	80- 90	66.03	3909	99.4,99.4
100	0.8513	1.181	1.468	1.060	1.008	1.320	1.381	1.045	90-100	1.234	3910	99.5,99.5
110	1.371	1.925	2.343	1.844	1.505	2.095	2.051	1.552	100-110	1.555	3912	99.5,99.5
120	2.430	3.005	3.379	3.109	2.588	3.169	2.946	2.520	110-120	2.321	3914	99.6,99.6
130	3.989	4.268	4.619	4.523	4.075	4.375	4.092	3.813	120-130	3.182	3917	99.6,99.6
140	5.378	5.541	5.905	5.729	5.278	5.564	5.385	5.053	130-140	3.755	3921	99.7,99.7
150	6.690	6.813	7.031	6.716	6.273	6.621	6.571	6.347	140-150	3.789	3925	99.8,99.8
160	8.245	7.933	7.956	7.747	7.497	7.636	7.642	7.714	150-160	3.323	3928	99.9,99.9
170	9.514	8.676	8.647	8.661	8.684	8.503	8.452	8.812	160-170	2.332	3930	100,100
180	9.743	9.120	9.013	9.321	9.748	9.122	9.011	9.317	170-180	0.8522	3931	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		


Conical surface Flux(90deg): 2580.2 lm
%lum = 65.6%
%lamp = 65.6%
Conical surface Flux(130deg): 3519.2 lm
%lum = 89.5%
%lamp = 89.5%

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Mr.Ma
Test Date:26 February 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.700m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:229.49V I:0.1705A P:38.381W PF:0.9811 Freq:50.00Hz Lamp Flux:3931.13x1 lm		
NAME: Verso 1500 40W WW	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:

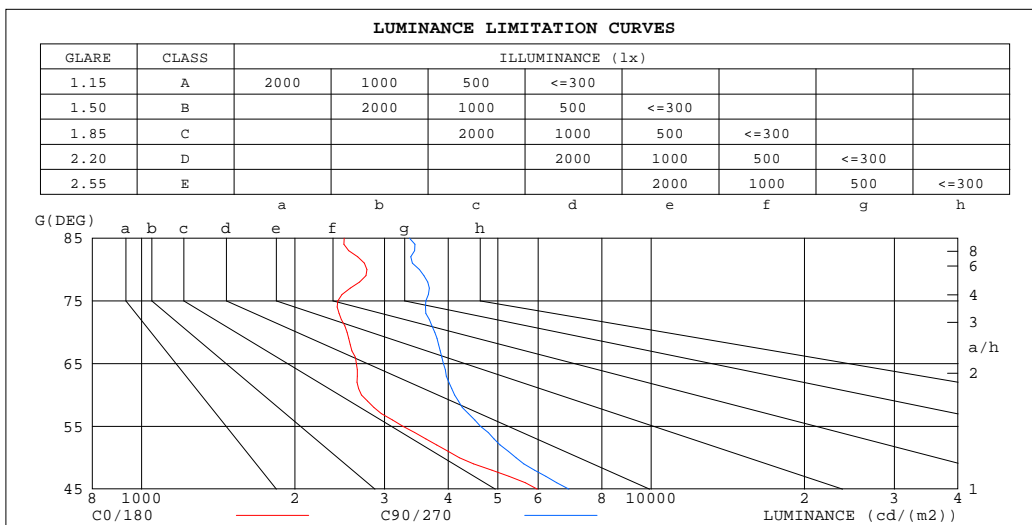

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	2500	3355
80	2767	3509
75	2429	3615
70	2530	3760
65	2641	3913
60	2700	4114
55	3262	4627
50	4206	5432
45	5974	6895


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:Mr.Ma
Test Date:26 February 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.700m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:229.49V I:0.1705A P:38.381W PF:0.9811 Freq:50.00Hz Lamp Flux:3931.13x1 lm		
NAME: Verso 1500 40W WW	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.99
1.0	1.05	1.02	.98	1.03	.90	.96	.99	.96	.93	.95	.93	.90	.91	.89	.88	.86
2.0	.93	.87	.82	.92	.86	.81	.88	.83	.79	.85	.81	.77	.82	.78	.76	.73
3.0	.83	.76	.70	.82	.75	.69	.79	.73	.68	.76	.71	.67	.73	.69	.66	.64
4.0	.75	.67	.61	.73	.66	.60	.71	.64	.59	.69	.63	.58	.66	.62	.58	.56
5.0	.68	.59	.53	.66	.59	.53	.64	.57	.52	.62	.56	.52	.60	.55	.51	.49
6.0	.61	.53	.47	.60	.52	.47	.59	.52	.46	.57	.51	.46	.55	.50	.45	.44
7.0	.56	.48	.42	.55	.47	.42	.54	.47	.41	.52	.46	.41	.51	.45	.41	.39
8.0	.51	.43	.38	.51	.43	.38	.49	.42	.37	.48	.42	.37	.47	.41	.37	.35
9.0	.47	.39	.34	.47	.39	.34	.46	.39	.34	.44	.38	.34	.43	.38	.34	.32
10.0	.44	.36	.31	.43	.36	.31	.42	.36	.31	.41	.35	.31	.40	.35	.31	.29

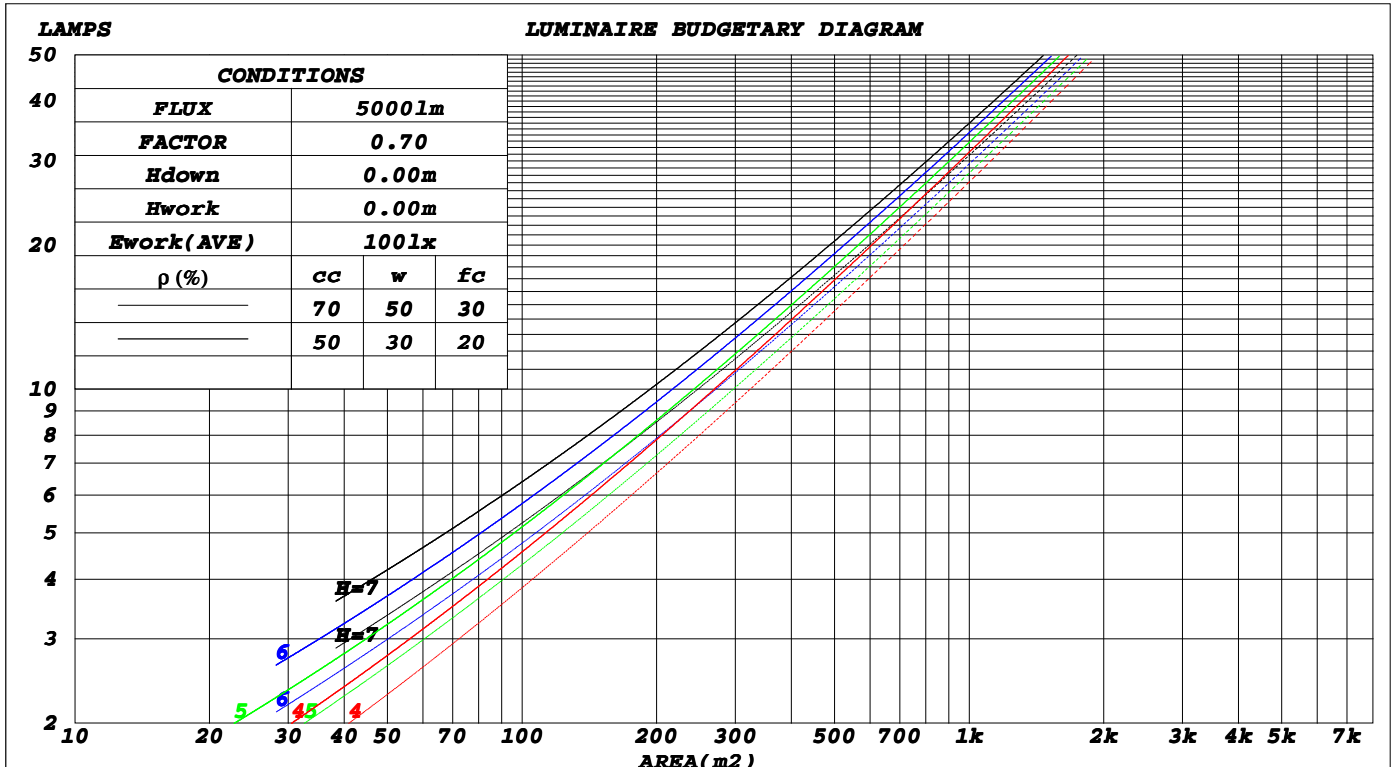

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Mr.Ma
Test Date:26 February 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.700m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:229.49V I:0.1705A P:38.381W PF:0.9811 Freq:50.00Hz Lamp Flux:3931.13x1 lm		
NAME: Verso 1500 40W WW	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0														
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
ρ_{fc}	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.277	.158	.050	.270	.154	.049	.256	.147	.047	.244	.141	.045	.233	.135	.043															
2.0	.261	.143	.044	.255	.140	.043	.243	.135	.042	.232	.130	.041	.222	.126	.040															
3.0	.244	.130	.039	.238	.127	.038	.228	.123	.038	.218	.120	.037	.209	.116	.036															
4.0	.227	.118	.035	.222	.116	.034	.213	.113	.034	.204	.110	.033	.196	.107	.033															
5.0	.211	.108	.031	.207	.106	.031	.199	.104	.031	.192	.101	.030	.184	.099	.030															
6.0	.198	.099	.028	.194	.098	.028	.187	.096	.028	.180	.093	.027	.174	.091	.027															
7.0	.185	.092	.026	.182	.091	.026	.175	.089	.026	.169	.087	.025	.164	.085	.025															
8.0	.174	.085	.024	.171	.084	.024	.165	.083	.024	.160	.081	.023	.155	.079	.023															
9.0	.164	.079	.022	.161	.079	.022	.156	.077	.022	.151	.076	.022	.147	.075	.022															
10.0	.155	.074	.021	.153	.074	.021	.148	.073	.020	.144	.071	.020	.139	.070	.020															

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.195	.195	.195	.166	.166	.166	.114	.114	.114	.065	.065	.065	.021	.021	.021	
1.0	.182	.161	.141	.156	.138	.122	.107	.095	.084	.061	.055	.049	.020	.018	.016	
2.0	.173	.136	.106	.148	.117	.092	.101	.081	.064	.058	.047	.038	.019	.015	.012	
3.0	.164	.119	.082	.140	.102	.071	.096	.071	.050	.056	.041	.030	.018	.013	.010	
4.0	.156	.105	.066	.134	.091	.057	.092	.063	.040	.053	.037	.024	.017	.012	.008	
5.0	.148	.094	.054	.127	.082	.047	.088	.057	.033	.051	.033	.020	.016	.011	.007	
6.0	.141	.086	.046	.121	.074	.040	.084	.052	.028	.049	.031	.017	.016	.010	.006	
7.0	.135	.079	.040	.116	.068	.034	.080	.048	.024	.047	.028	.015	.015	.009	.005	
8.0	.129	.073	.035	.111	.063	.030	.077	.044	.021	.045	.026	.013	.014	.009	.004	
9.0	.123	.068	.031	.106	.059	.027	.073	.041	.019	.043	.025	.011	.014	.008	.004	
10.0	.118	.064	.028	.101	.055	.024	.070	.039	.017	.041	.023	.010	.013	.008	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:Mr.Ma
Test Date:26 February 2024
 γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.700m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:229.49V I:0.1705A P:38.381W PF:0.9811 Freq:50.00Hz Lamp Flux:3931.13x1 lm										
NAME: Verso 1500 40W WW					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: PURATI PTY LTD					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	12.2	13.6	12.4	13.8	14.0	13.5	14.9	13.7	15.1	15.3
3H	13.0	14.3	13.3	14.5	14.8	14.5	15.8	14.8	16.0	16.3
4H	13.4	14.6	13.7	14.9	15.1	15.0	16.2	15.3	16.5	16.7
6H	13.8	14.9	14.1	15.2	15.5	15.5	16.6	15.8	16.9	17.2
8H	14.0	15.1	14.3	15.3	15.6	15.6	16.7	15.9	17.0	17.3
12H	14.0	15.1	14.4	15.4	15.7	15.7	16.8	16.1	17.1	17.4
4H 2H	12.7	13.9	13.0	14.2	14.4	13.8	15.0	14.1	15.2	15.5
3H	13.8	14.9	14.2	15.2	15.5	15.1	16.2	15.5	16.5	16.8
4H	14.4	15.4	14.8	15.7	16.0	15.8	16.7	16.1	17.1	17.4
6H	15.0	15.8	15.4	16.2	16.5	16.4	17.2	16.8	17.6	18.0
8H	15.2	16.0	15.6	16.4	16.7	16.6	17.4	17.0	17.8	18.2
12H	15.3	16.1	15.8	16.5	16.9	16.8	17.5	17.2	17.9	18.3
8H 4H	14.8	15.6	15.2	16.0	16.4	16.0	16.8	16.4	17.2	17.6
6H	15.6	16.2	16.0	16.7	17.1	16.8	17.5	17.3	17.9	18.3
8H	15.9	16.5	16.4	16.9	17.4	17.2	17.8	17.6	18.2	18.7
12H	16.2	16.7	16.7	17.1	17.6	17.5	18.0	17.9	18.4	18.9
12H 4H	14.9	15.6	15.3	16.0	16.4	16.0	16.7	16.4	17.1	17.5
6H	15.7	16.3	16.2	16.7	17.2	16.9	17.5	17.4	17.9	18.4
8H	16.1	16.6	16.6	17.1	17.6	17.3	17.8	17.8	18.3	18.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.5 / - 0.5					+ 0.4 / - 0.4				
1.5H	+ 0.2 / - 0.5					+ 0.2 / - 0.4				
2.0H	+ 0.9 / - 0.8					+ 0.7 / - 0.5				

CIE Pub.117, 3931 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 4.8$)
Area: 0.21 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:Mr.Ma
Test Date:26 February 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.700m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:229.49V I:0.1705A P:38.381W PF:0.9811 Freq:50.00Hz Lamp Flux:3931.13x1 lm		
NAME: Verso 1500 40W WW	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	64	53	47	63	53	47	62	53	47	41
0.80	74	63	57	73	63	57	71	62	56	50
1.00	82	72	65	80	71	65	78	72	64	58
1.25	88	79	73	87	78	72	84	77	71	65
1.50	92	84	78	91	83	77	88	81	76	69
2.00	98	91	85	97	90	85	93	88	83	76
2.50	102	95	90	100	93	89	96	91	87	79
3.00	104	98	94	102	97	93	98	94	90	82
4.00	108	103	99	106	101	97	101	98	95	86
5.00	110	106	102	108	104	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Mr.Ma
Test Date:26 February 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:229.49V I:0.1705A P:38.381W PF:0.9811 Freq:50.00Hz Lamp Flux:3931.13x1 lm		
NAME: Verso 1500 40W WW	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:

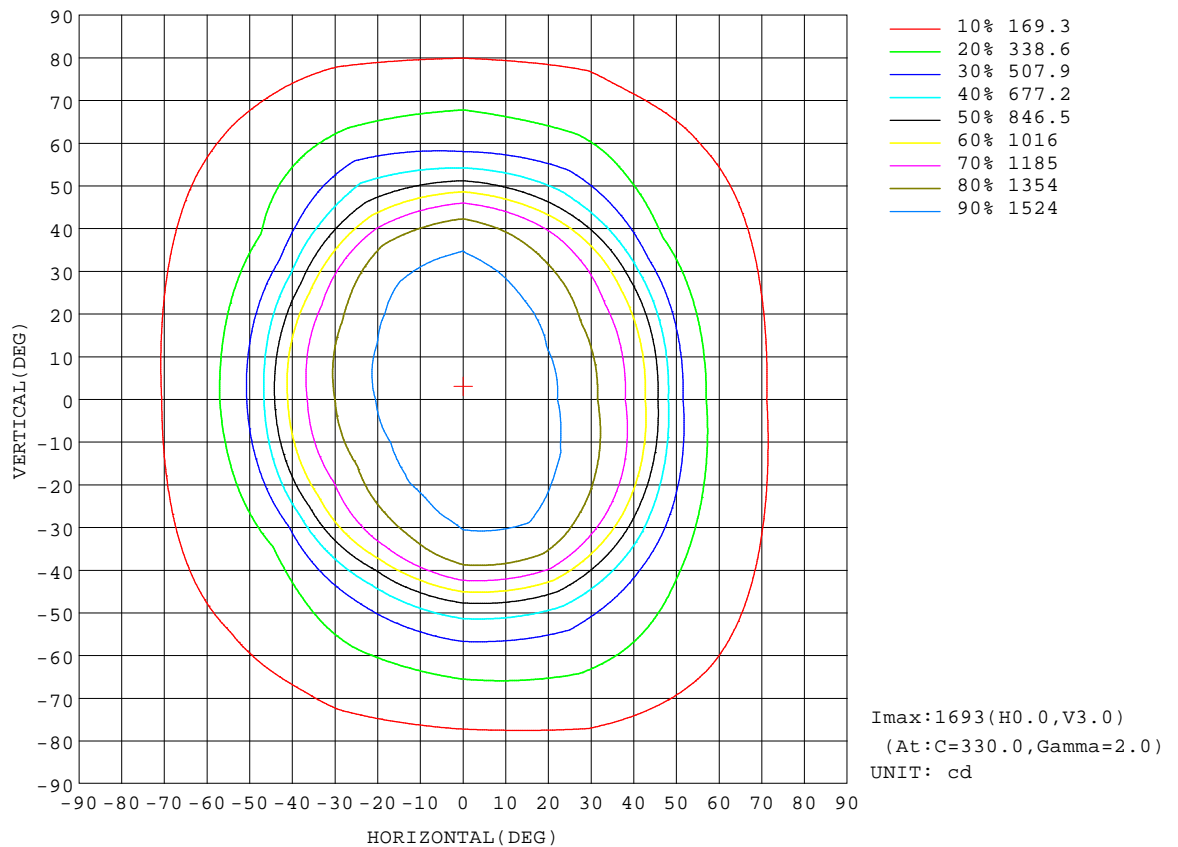


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:Mr.Ma
Test Date:26 February 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:229.49V I:0.1705A P:38.381W PF:0.9811 Freq:50.00Hz Lamp Flux:3931.13x1 lm		
NAME: Verso 1500 40W WW	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:

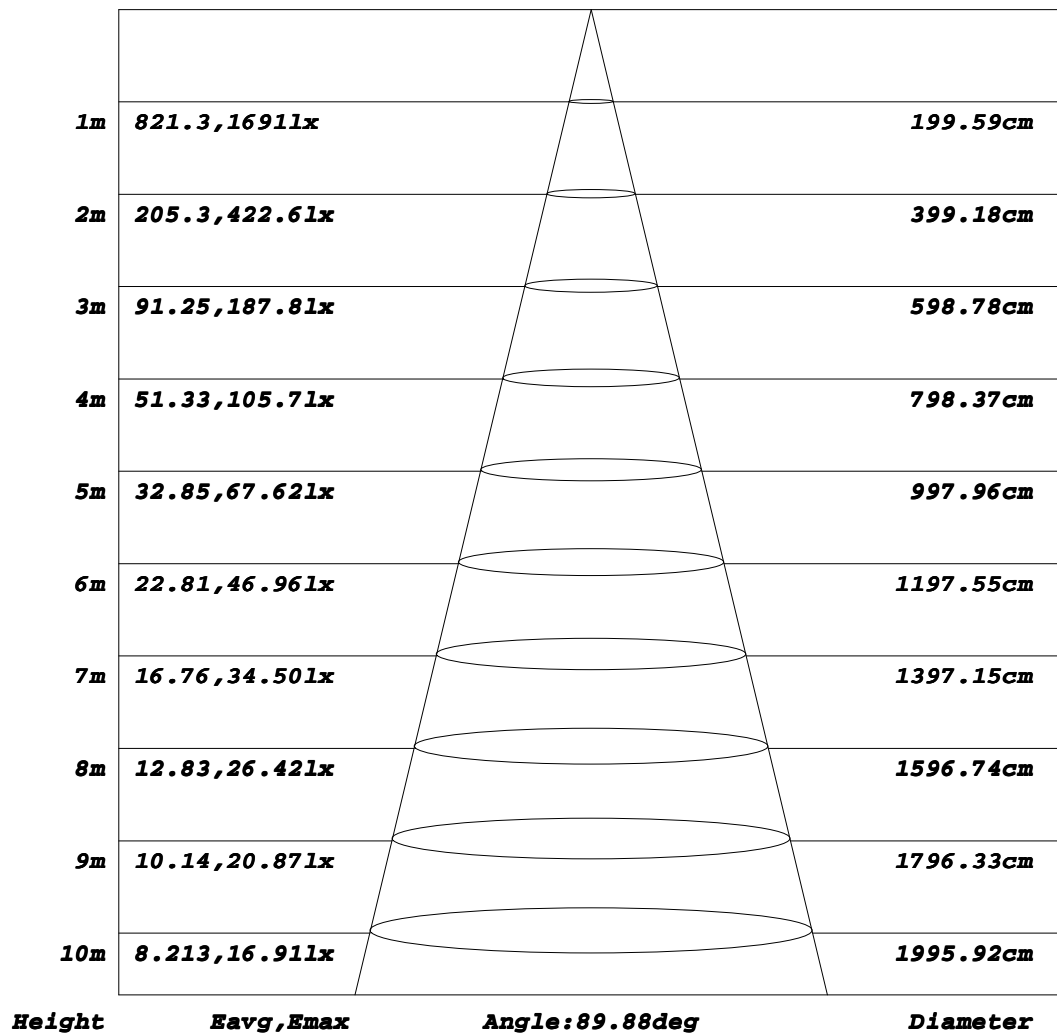Flux out:2580 lm


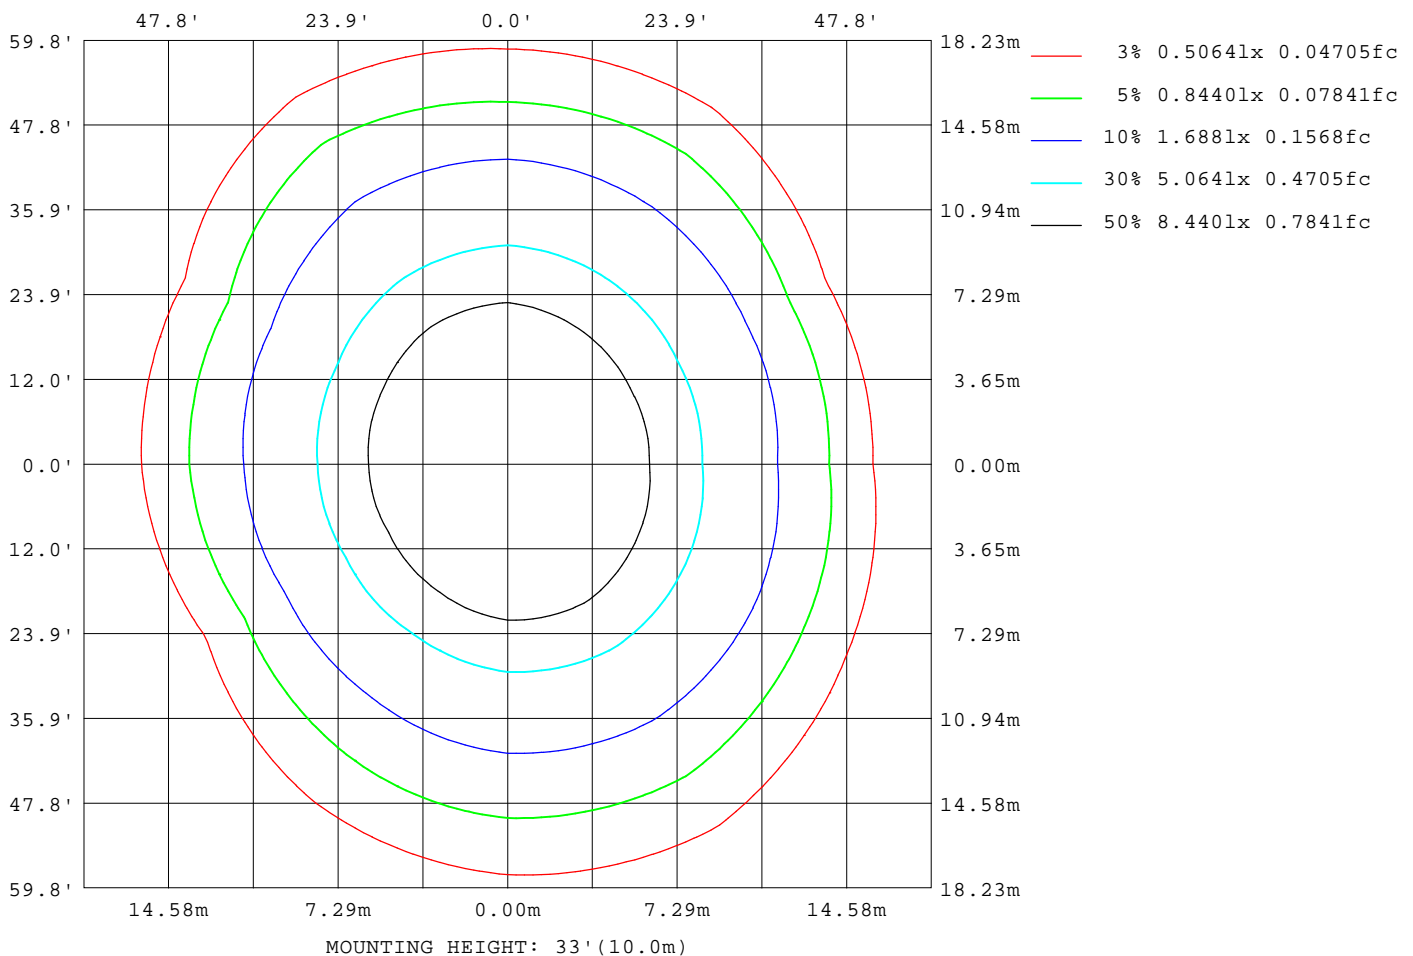
Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Mr.Ma
Test Date: 26 February 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity: 65.0%
Test Distance: 6.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:229.49V I:0.1705A P:38.381W PF:0.9811 Freq:50.00Hz Lamp Flux:3931.13x1 lm		
NAME: Verso 1500 40W WW	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:



C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Mr.Ma
Test Date: 26 February 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity: 65.0%
Test Distance: 6.700m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:229.49V I:0.1705A P:38.381W PF:0.9811 Freq:50.00Hz Lamp Flux:3931.13x1 lm		
NAME: Verso 1500 40W WW	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: PURATI PTY LTD	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	2635
L_0~180(75)av	2410
L_0~180(85)av	2380
L_90~270(65)av	4024
L_90~270(75)av	3971
L_90~270(85)av	4241
L_45(65)av	3426
L_45(75)av	3235
L_45(85)av	3330

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Mr.Ma
Test Date:26 February 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

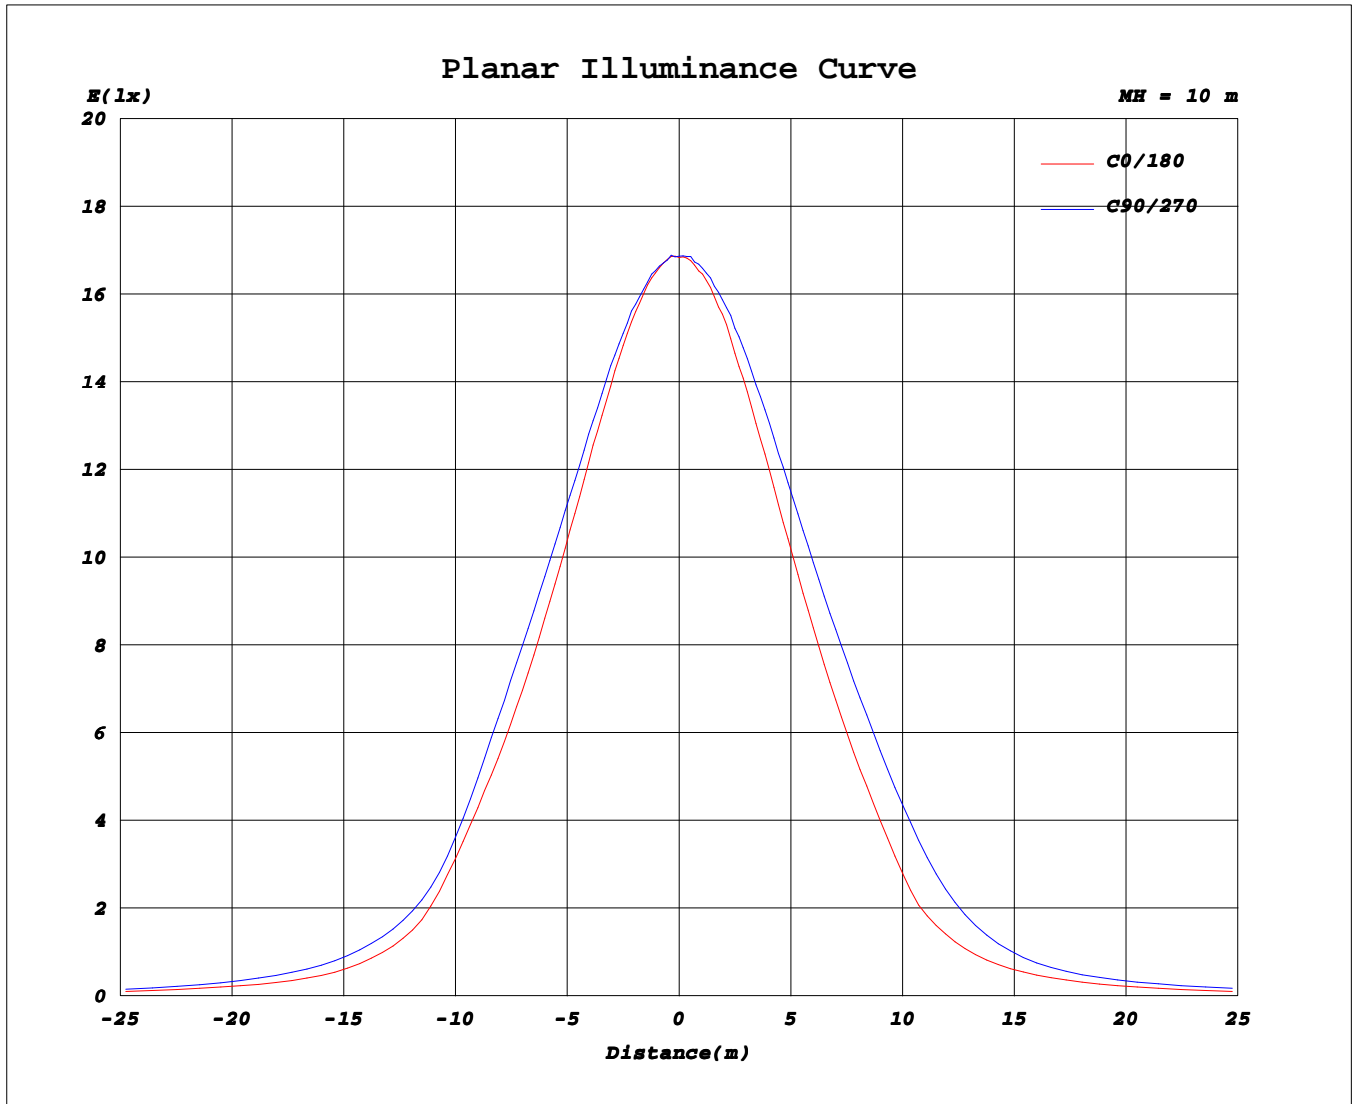

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: Mr.Ma
Test Date: 26 February 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity: 65.0%
Test Distance: 6.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:229.49V I:0.1705A P:38.381W PF:0.9811 Freq:50.00Hz Lamp Flux:3931.13x1 lm																	
NAME: Verso 1500 40W WW									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.: PURATI PTY LTD									SUR.:						Shielding Angle:		

Table--1

UNIT: cd

C(°) \ γ (°)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1685	1685	1685	1685	1685	1685	1685	1685	1685	1685	1685	1685						
5	1681	1684	1686	1682	1672	1672	1674	1675	1681	1687	1685	1683						
10	1655	1669	1676	1668	1650	1642	1646	1652	1670	1678	1675	1663						
15	1615	1642	1659	1649	1613	1587	1594	1617	1651	1666	1651	1625						
20	1554	1591	1635	1615	1562	1522	1531	1568	1624	1645	1608	1570						
25	1479	1536	1600	1578	1499	1438	1452	1504	1582	1618	1559	1499						
30	1387	1465	1552	1529	1414	1336	1356	1420	1534	1579	1496	1410						
35	1269	1369	1481	1452	1298	1204	1229	1309	1466	1520	1415	1303						
40	1123	1239	1357	1310	1111	1020	1066	1150	1354	1426	1301	1166						
45	888	1007	1110	1023	804	725	792	873	1133	1232	1115	965						
50	568	698	791	733	585	470	534	599	860	919	799	631						
55	393	486	586	557	444	317	383	402	660	633	593	408						
60	284	361	459	432	362	254	293	315	490	450	435	289						
65	235	301	382	347	288	223	233	274	368	367	343	246						
70	182	248	284	270	215	173	177	227	283	313	263	210						
75	132	181	207	196	169	120	130	165	216	235	197	149						
80	101	129	151	128	104	77.8	94.5	116	161	168	155	109						
85	45.8	64.4	73.6	61.4	32.9	25.0	41.3	53.4	89.0	93.9	87.6	61.4						
90	0.66	1.09	0.88	0.89	0.72	0.60	0.75	0.84	1.00	13.6	17.9	6.64						
95	0.69	0.80	1.07	1.13	0.90	0.75	0.86	0.98	1.19	1.14	0.95	0.87						
100	0.85	0.99	1.37	1.47	1.18	0.94	1.01	1.17	1.47	1.38	1.11	0.98						
105	1.07	1.28	1.75	1.89	1.59	1.21	1.21	1.48	1.83	1.69	1.36	1.15						
110	1.37	1.68	2.17	2.34	2.12	1.57	1.51	1.94	2.24	2.05	1.71	1.39						
115	1.81	2.21	2.64	2.84	2.74	2.10	1.94	2.54	2.68	2.48	2.18	1.75						
120	2.43	2.86	3.15	3.38	3.39	2.83	2.59	3.17	3.17	2.95	2.75	2.29						
125	3.18	3.53	3.73	3.97	4.02	3.61	3.33	3.79	3.73	3.46	3.33	2.97						
130	3.99	4.17	4.37	4.62	4.66	4.38	4.07	4.41	4.34	4.09	3.91	3.71						
135	4.73	4.78	5.05	5.28	5.28	5.02	4.70	5.03	4.95	4.74	4.49	4.42						
140	5.38	5.38	5.70	5.90	5.85	5.61	5.28	5.58	5.54	5.38	5.05	5.06						
145	6.02	6.04	6.31	6.50	6.35	6.11	5.79	6.07	6.13	5.99	5.66	5.69						
150	6.69	6.75	6.87	7.03	6.83	6.60	6.27	6.56	6.68	6.57	6.35	6.35						
155	7.47	7.43	7.41	7.51	7.30	7.15	6.88	7.07	7.21	7.13	7.01	7.09						
160	8.24	7.99	7.88	7.96	7.78	7.71	7.50	7.56	7.71	7.64	7.57	7.86						
165	8.93	8.41	8.25	8.33	8.22	8.28	8.11	8.10	8.12	8.08	8.04	8.60						
170	9.51	8.77	8.58	8.65	8.59	8.74	8.68	8.52	8.49	8.45	8.47	9.16						
175	9.78	9.10	8.86	8.89	8.88	9.11	9.12	8.87	8.77	8.76	8.81	9.43						
180	9.74	9.21	9.03	9.01	9.07	9.57	9.75	9.22	9.02	9.01	9.07	9.57						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:Mr.Ma
Test Date:26 February 2024
γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.459
Humidity:65.0%
Test Distance:6.700m [K=1.0000]
Remarks: