

Ring Pro Surface Office 900

Indirect, Black, 3000K, 75W, Non Dim

<https://purati.com/product/ring-pro-surface-office-900-indirect/>

DESCRIPTION

The stylish circular luminaire for elegant and sophisticated architectural lighting design. With various finishes, 3 sizes and 2 mounting options, the Ring luminaire can be used in a variety of environments.

QUICKINFO

GENERAL

Finish	Black
Material	Aluminium, Micro-prismatic cover
IP Rating	20
IK Rating	06
Lifespan	>50,000h L80
Warranty	5 years


LED

Lumen	9000lm
CCT	3000K
CRI	>80 as standard, >90 on request
SDCM	<3
Beam Angles	90°down/120° up for Prism diffuser

ELECTRICAL

Voltage	220-240V
Power	75W
Driver (Built-in)	Non Dim

		IP20	IK06	CRI >80	5 years
---	---	------	------	---------	---------

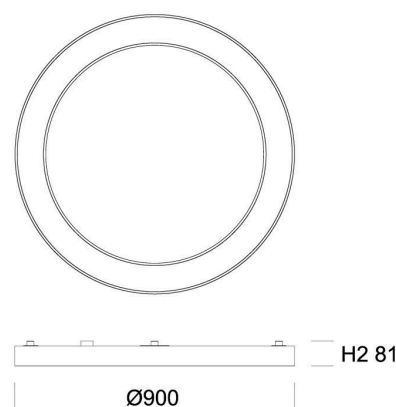

PURATI PTY LTD

Unit 10, 80 O'Riordan St, Alexandria NSW 2015

Tel: +61 2 8065 8181 sales@purati.com